
## GENERAL NOTES:


Anchor bolts, hardened washers and heavy hex nuts shall be coated with a minimum of two coats of inorganic zinc primer to provide a total dry film thickness of 4 mils minimum, 6 mils maximum, or galvanized in accordance with Sec 1081.

Weight of the anchor bolts, hardened washers and heavy hex nuts for bearings are incuded in the weight of the Fabricated Structural Steel.

Indicates machine finish surface.


Shop drawings are not required for the lead plates and the preformed fabric pads.

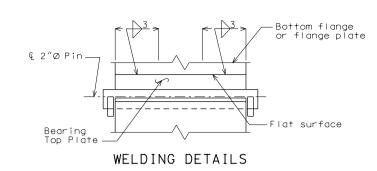




END VIEW OF WEB


Number Required:

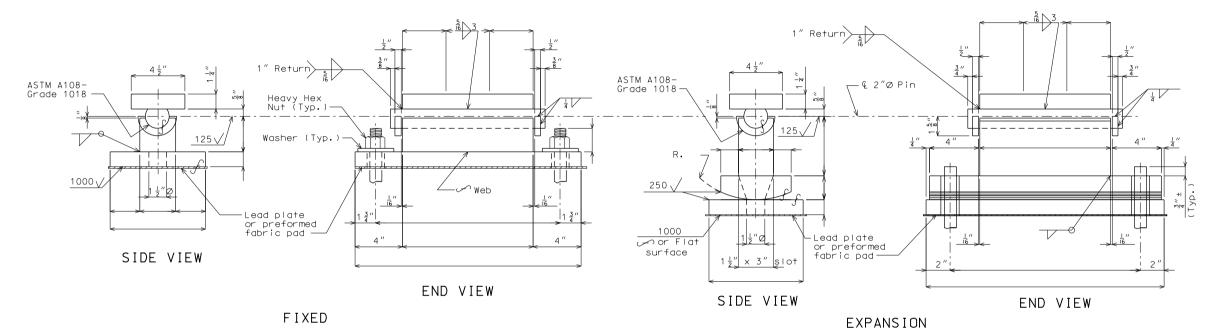

TYPE D BEARINGS

(Estimated Weight pounds)





Number Required:

DETAIL FOR 3/4"Ø THRU 2 1/2"Ø ANCHOR BOLTS

OPTIONAL DETAIL FOR 1 3/8"Ø THRU 2 1/2"Ø ANCHOR BOLTS

## SWEDGE ANCHOR BOLTS DETAILS

(1)  $\frac{1}{8}''$  for  $\frac{3}{4}''$ Ø thru  $1\frac{1}{4}''$ Ø anchor bolts  $\frac{1}{8}''$  to  $\frac{1}{4}''$  for  $1\frac{3}{8}''$ Ø thru  $2\frac{1}{2}''$ Ø anchor bolts

Detailed Checked