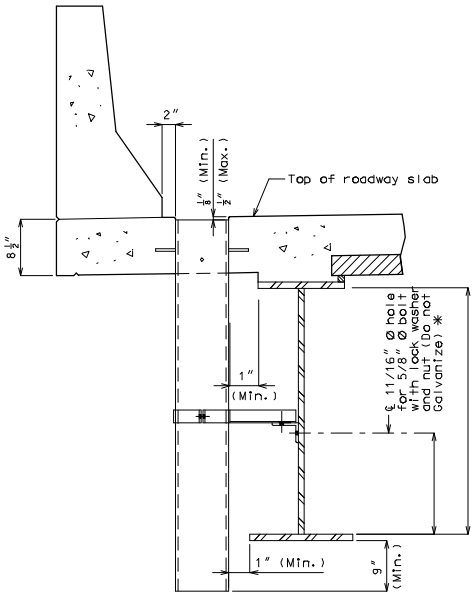

PART SECTION NEAR DRAIN

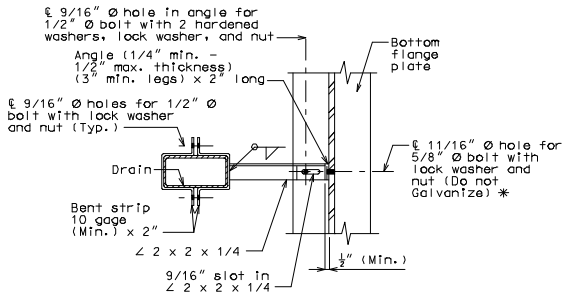

PART SECTION SHOWING BRACKET ASSEMBLY



PART PLAN OF SLAB AT DRAIN

DETAILS OF DRAINS TRANSVERSE TO ROADWAY



ELEVATION OF DRAIN

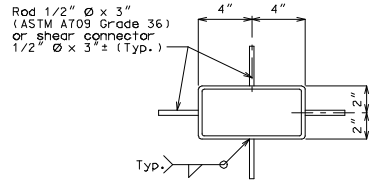

PLAN OF DRAIN

SLAB DRAIN DETAILS

Notes:

Slab drains may be fabricated of either 1/4" welded sheets of ASTM A709 Grade 36 steel or from 1/4" structural steel tubing ASTM A500 or A501.

Slab drain bracket assembly shall be ASTM A709 Grade 36 steel.

Outside dimensions of drains are 8" x 4".

Locate drains in slab by dimensions shown in Part Section Near Drain.

Shift reinforcing steel in field where necessary to clear drains.

The drains and bracket assembly shall be galvanized in accordance with ASTM A123.

All bolts, hardened washers, lock washers and nuts shall be galvanized in accordance with ASTM A153, except as shown.

Shop drawings will not be required for the slab drains and the bracket assembly.

The bolt hole for the bracket assembly attachment shall be located on the plate girder shop drawings.

✳ See Sec 1080.4

Note to Detailer:

Details shown are for drains transverse to roadway, use details for drains parallel to roadway if necessary.

"THIS MEDIA SHOULD NOT BE CONSIDERED A CERTIFIED DOCUMENT."

DATE PREPARED 07/28/2008
ROUTE ✳ STATE MO
DISTRICT BR SHEET NO. ✳
COUNTY ✳
JOB NO. ✳
CONTRACT ID.
PROJECT NO.
BRIDGE NO. DRA1OWS

DESCRIPTION | DATE

MISSOURI HIGHWAYS AND TRANSPORTION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

IF A SEAL IS PRESENT ON THIS SHEET IT HAS BEEN ELECTRONICALLY SEALED AND DATED.

Detailed
Checked

Note: This drawing is not to scale. Follow dimensions. Sheet No. of