



ROUTE	STATE	DISTRICT	SHEET NO.
	MO		
JOB NO.			
CONTRACT ID			
PROJECT NO.			
COUNTY			DATE

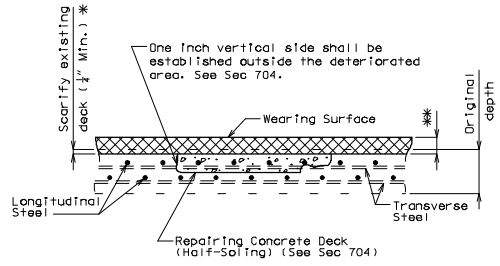


- \* Scarification not required for Asphaltic Concrete Wearing Surface and Epoxy Polymer Concrete Overlay.
- \*\* 1/4" (min.) for Epoxy Polymer Concrete Overlay
- 1 3/4" (min.) for Latex Modified Concrete Wearing Surface
- 2 1/4" (min.) for Low Slump Concrete or Silica Fume Concrete Wearing Surface

HALF-SOLED AREA

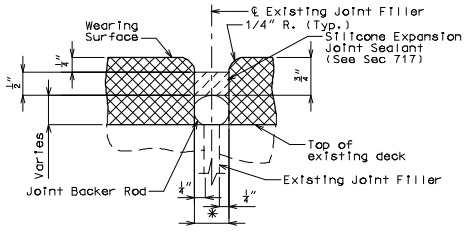


- \* Width of joint seal to be no less than the depth and no more than twice the depth of the joint seal.

SECTION THRU JOINT  
(LATEX, LOW SLUMP OR SILICA FUME CONCRETE WEARING SURFACE)

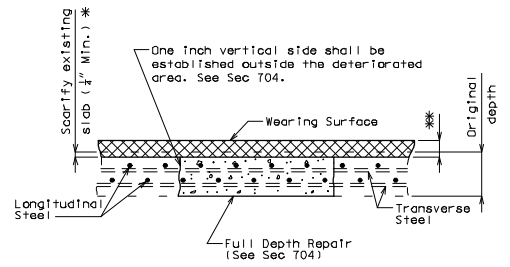


- \* Scarification not required for Asphaltic Concrete Wearing Surface and Epoxy Polymer Concrete Overlay.
- \*\* 1/4" (min.) for Epoxy Polymer Concrete Overlay
- 1 3/4" (min.) for Latex Modified Concrete Wearing Surface
- 2 1/4" (min.) for Low Slump Concrete or Silica Fume Concrete Wearing Surface


FULL DEPTH REPAIR

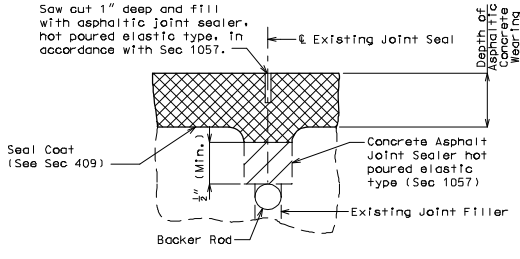

SECTION THRU JOINT  
(ASPHALTIC CONCRETE WEARING SURFACE)

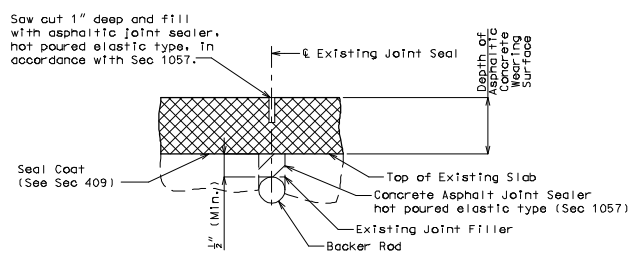


SECTION THRU JOINT  
(ASPHALTIC CONCRETE WEARING SURFACE)

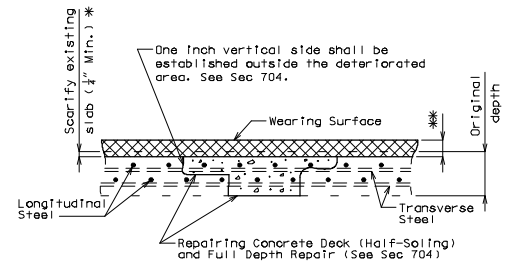


- \* Scarification not required for Asphaltic Concrete Wearing Surface and Epoxy Polymer Concrete Overlay.
- \*\* 1/4" (min.) for Epoxy Polymer Concrete Overlay
- 1 3/4" (min.) for Latex Modified Concrete Wearing Surface
- 2 1/4" (min.) for Low Slump Concrete or Silica Fume Concrete Wearing Surface

FULL DEPTH REPAIR  
IN HALF-SOLED AREA

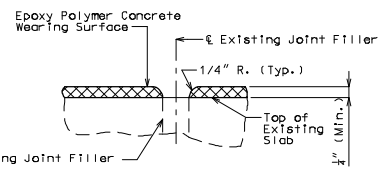

SECTION THRU JOINT  
(EPOXY POLYMER CONCRETE OVERLAY)

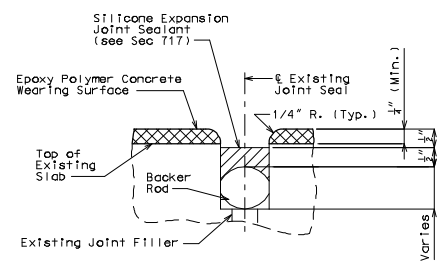

SECTION THRU JOINT  
(EPOXY POLYMER CONCRETE OVERLAY)

Note to Detailer:  
Modify details as required by project.

DECK REPAIR DETAILS

FILLED JOINTS