



ROUTE	STATE	DISTRICT	SHEET NO.
	MO		
JOB NO.			
CONTRACT ID			
PROJECT NO.			
COUNTY			DATE

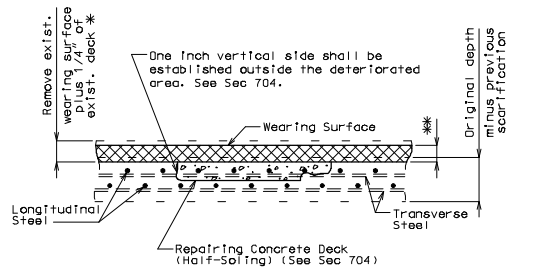


- * 1/4" removal not required for Asphaltic Concrete Wearing Surface and Epoxy Polymer Concrete Overlay.
- ** 1/4" (min.) for Epoxy Polymer Concrete Overlay
- 1 3/4" (min.) for Latex Modified Concrete Wearing Surface
- 2 1/4" (min.) for Low Slump Concrete or Silica Fume Concrete Wearing Surface

HALF-SOLED AREA

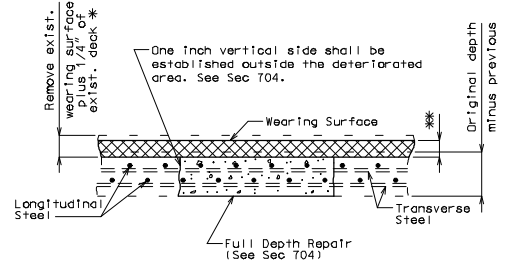

- * 1/4" removal not required for Asphaltic Concrete Wearing Surface and Epoxy Polymer Concrete Overlay.
- ** 1/4" (min.) for Epoxy Polymer Concrete Overlay
- 1 3/4" (min.) for Latex Modified Concrete Wearing Surface
- 2 1/4" (min.) for Low Slump Concrete or Silica Fume Concrete Wearing Surface

FULL DEPTH REPAIR

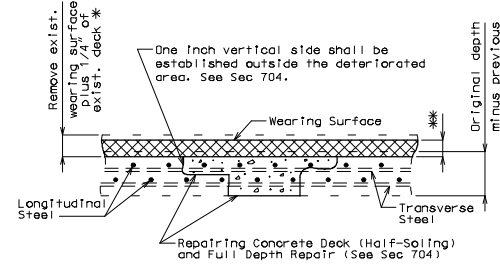

- * 1/4" removal not required for Asphaltic Concrete Wearing Surface and Epoxy Polymer Concrete Overlay.
- ** 1/4" (min.) for Epoxy Polymer Concrete Overlay
- 1 3/4" (min.) for Latex Modified Concrete Wearing Surface
- 2 1/4" (min.) for Low Slump Concrete or Silica Fume Concrete Wearing Surface

FULL DEPTH REPAIR IN HALF-SOLED AREA

DECK REPAIR DETAILS

Note to Detailer:

Modify details as required by project.

Detailed
Checked

Note: This drawing is not to scale. Follow dimensions.

Sheet No. of

WID 4A