

Gasconade County Route T Roadway and Bridge Improvements over the Bourbeuse River

Job No: J5S3174



Bridge Facts:

- Constructed in 1958
- Bridge deteriorating, bridge deck in serious condition on last inspection

Project Facts:

- Removal and replacement of bridge on Route T over the Bourbeuse River between Route V and Herbert Rd.
- Existing Bridge Deck: 20' width, 405' length
- Proposed Bridge Deck: 24' width, 420' length
- Roadway improvements approximately 220' to the north and 210' to the south of the bridge


Traffic Impacts:

- Bridge will be closed during construction
- Closed up to 126 days
- Detour signed during closure

Construction:

- Construct in 2019
- Estimated Total Construction Cost = \$1,818,000

EXISTING BRIDGE TYPICAL SECTION

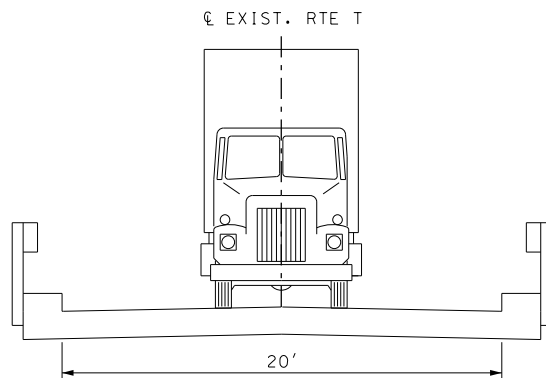


EXISTING BRIDGE FACTS

ROUTE T - BRIDGE #N0563

- EXISTING BRIDGE WAS CONSTRUCTED IN 1958
- LENGTH = 405'

PROPOSED BRIDGE TYPICAL SECTION

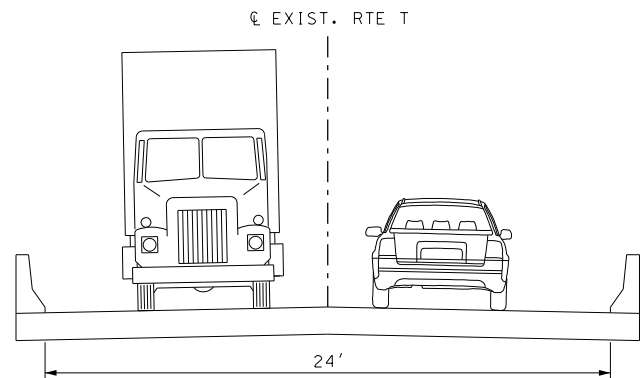

PROPOSED BRIDGE FACTS

ROUTE T - BRIDGE #A8724

- CONSTRUCTION YEAR 2019
- LENGTH = 420'

For more information: www.modot.org/central

573.751.3322 or 1.888.275.6636 (toll-free)
Facebook: MoDOT.Central / Instagram: @MoDOT_Central

