

ADDENDUM NO. 2

September 26, 2019

ST. CHARLES COUNTY

**ROUTE 364 AT GUTERMUTH ROAD
INTERCHANGE
STP-7302(669)
J6P3350**

This Addendum No. 2 modifies original issued bid documents as follows:

1. MODIFICATIONS TO THE PROJECT PLANS SHEETS:

- a)** Replace Page “ITS QUANTITIES SHEET 1 OF 1” with “ITS QUANTITIES SHEET 1 OF 1 ADDENDUM 1”.
- b)** Replace Page “ITS SHEET 2 OF 3” with “ITS SHEET 2 OF 3 ADDENDUM 1”.
- c)** Replace Page “ITS SHEET 3 OF 3” with “ITS SHEET 3 OF 3 ADDENDUM 1”.

These sheets should have been included with Addendum No. 1; however, they were not included in that document.

The CONTRACTOR shall sign this addendum acknowledgment and return it with the bid proposal.

Addendum No. 1

Dated September 26, 2019

Addendum No. 2

Dated September 26, 2019

We, the undersigned, acknowledge the receipt of the above addendum(s) as dated.

By: _____

Title: _____

Date: _____

CONDUIT & CABLE									
FROM	TO	CENTER TO CENTER DISTANCE	CONDUIT		CABLE				
			TRENCH 2"	PUSHED 2"	POWER			72SM FIBER	24SM FIBER
					1c #2	1c #4	1c #8		
PB1	PB2	743		741				763	763
PB2	ITS Cab 10	17	15						154
PB2	DMS - 10	7	EX						67
PB2	PB4	239		237				259	259
PB4	PB6	38		36				58	58
PB6	PB9	666	EX					EX -726-	-726- EX
PB9	PB11	129	EX						EX
PB11	ITS CAB 12	12	EX						-72- EX
PB3	ITS Cab 10	16	14		228		228		
PB3	DMS - 10	7	EX				201		
PB3	PB5	245		243	795				
PB5	PB7	41		39	183				
PB7	PB8	655	EX		2145				
PB10	PB12	132	EX						
PB12	ITS CAB 12	6	EX			EX			
PB12	PS	95	EX		465				
PB10	PS	82	EX						
TOTAL		3130	29	1296	3816	0	429	-1806-	-2099-

EQUIPMENT AND SPLICING

REVISION

FEDERAL ID NUMBER
STP-7302 (669)

PROJECT NUMBER
J6P3350

GBA PROJECT NUMBER
13659.00

DATE _____

05/03/2019

DESIGNED:
KGM

DRAWN.
JJF

REVIEWED
KGM

SHEET TITLE

ITS QUANTITIES
SHEET 1 OF 1


ADDENDUM 1

T NUMBER


3

REVISION
FEDERAL ID NUMBER STP-7302 (669)
PROJECT NUMBER J6P3350
GBA PROJECT NUMBER 13659.00
DATE 05/03/2019
DESIGNED: JUF
DRAWN: JUF
REVIEWED KGM
SHEET TITLE ITS SHEET 2 OF 3 ADDENDUM 1
SHEET NUMBER 119

FILE: G:\13659\Micro\Traffic\119 ITS_01_J6P3350_150.dgn
PLOTTED ON 5/6/2019 9:10:43 AM
DRAWN BY: JUF

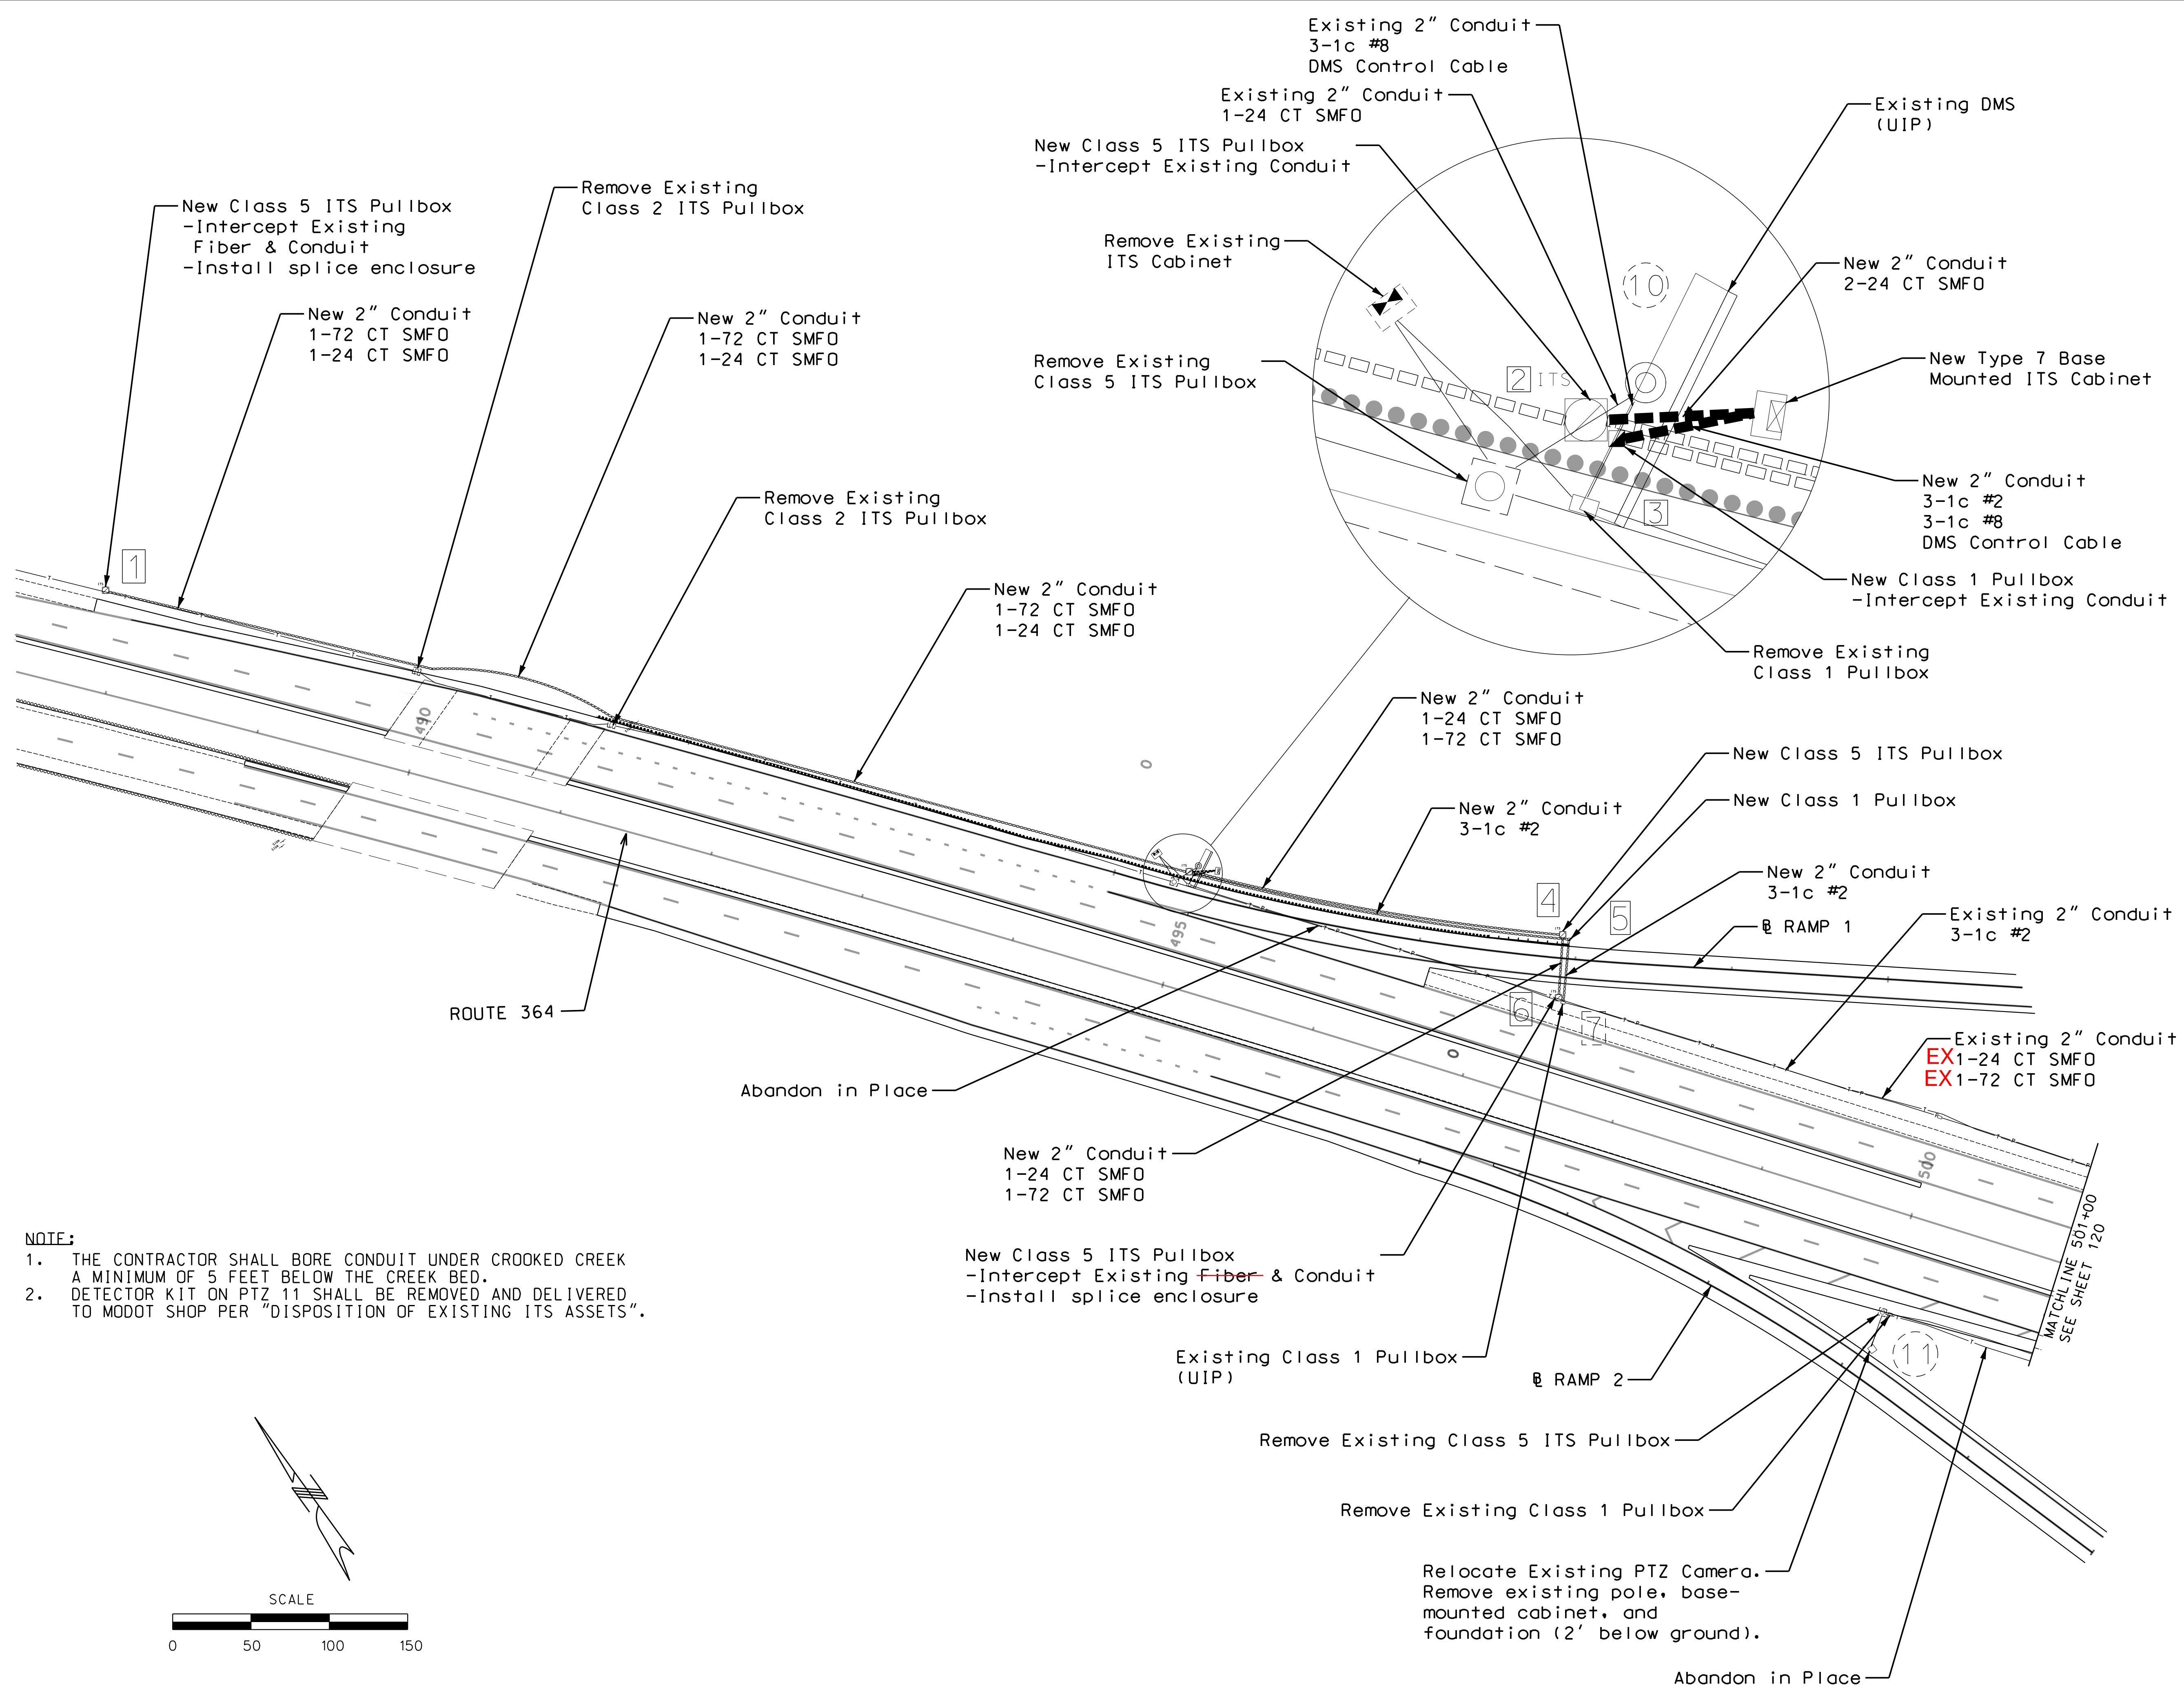

- NOTE:
1. THE CONTRACTOR SHALL BORE CONDUIT UNDER CROOKED CREEK A MINIMUM OF 5 FEET BELOW THE CREEK BED.
 2. DETECTOR KIT ON PTZ 11 SHALL BE REMOVED AND DELIVERED TO MODOT SHOP PER "DISPOSITION OF EXISTING ITS ASSETS".

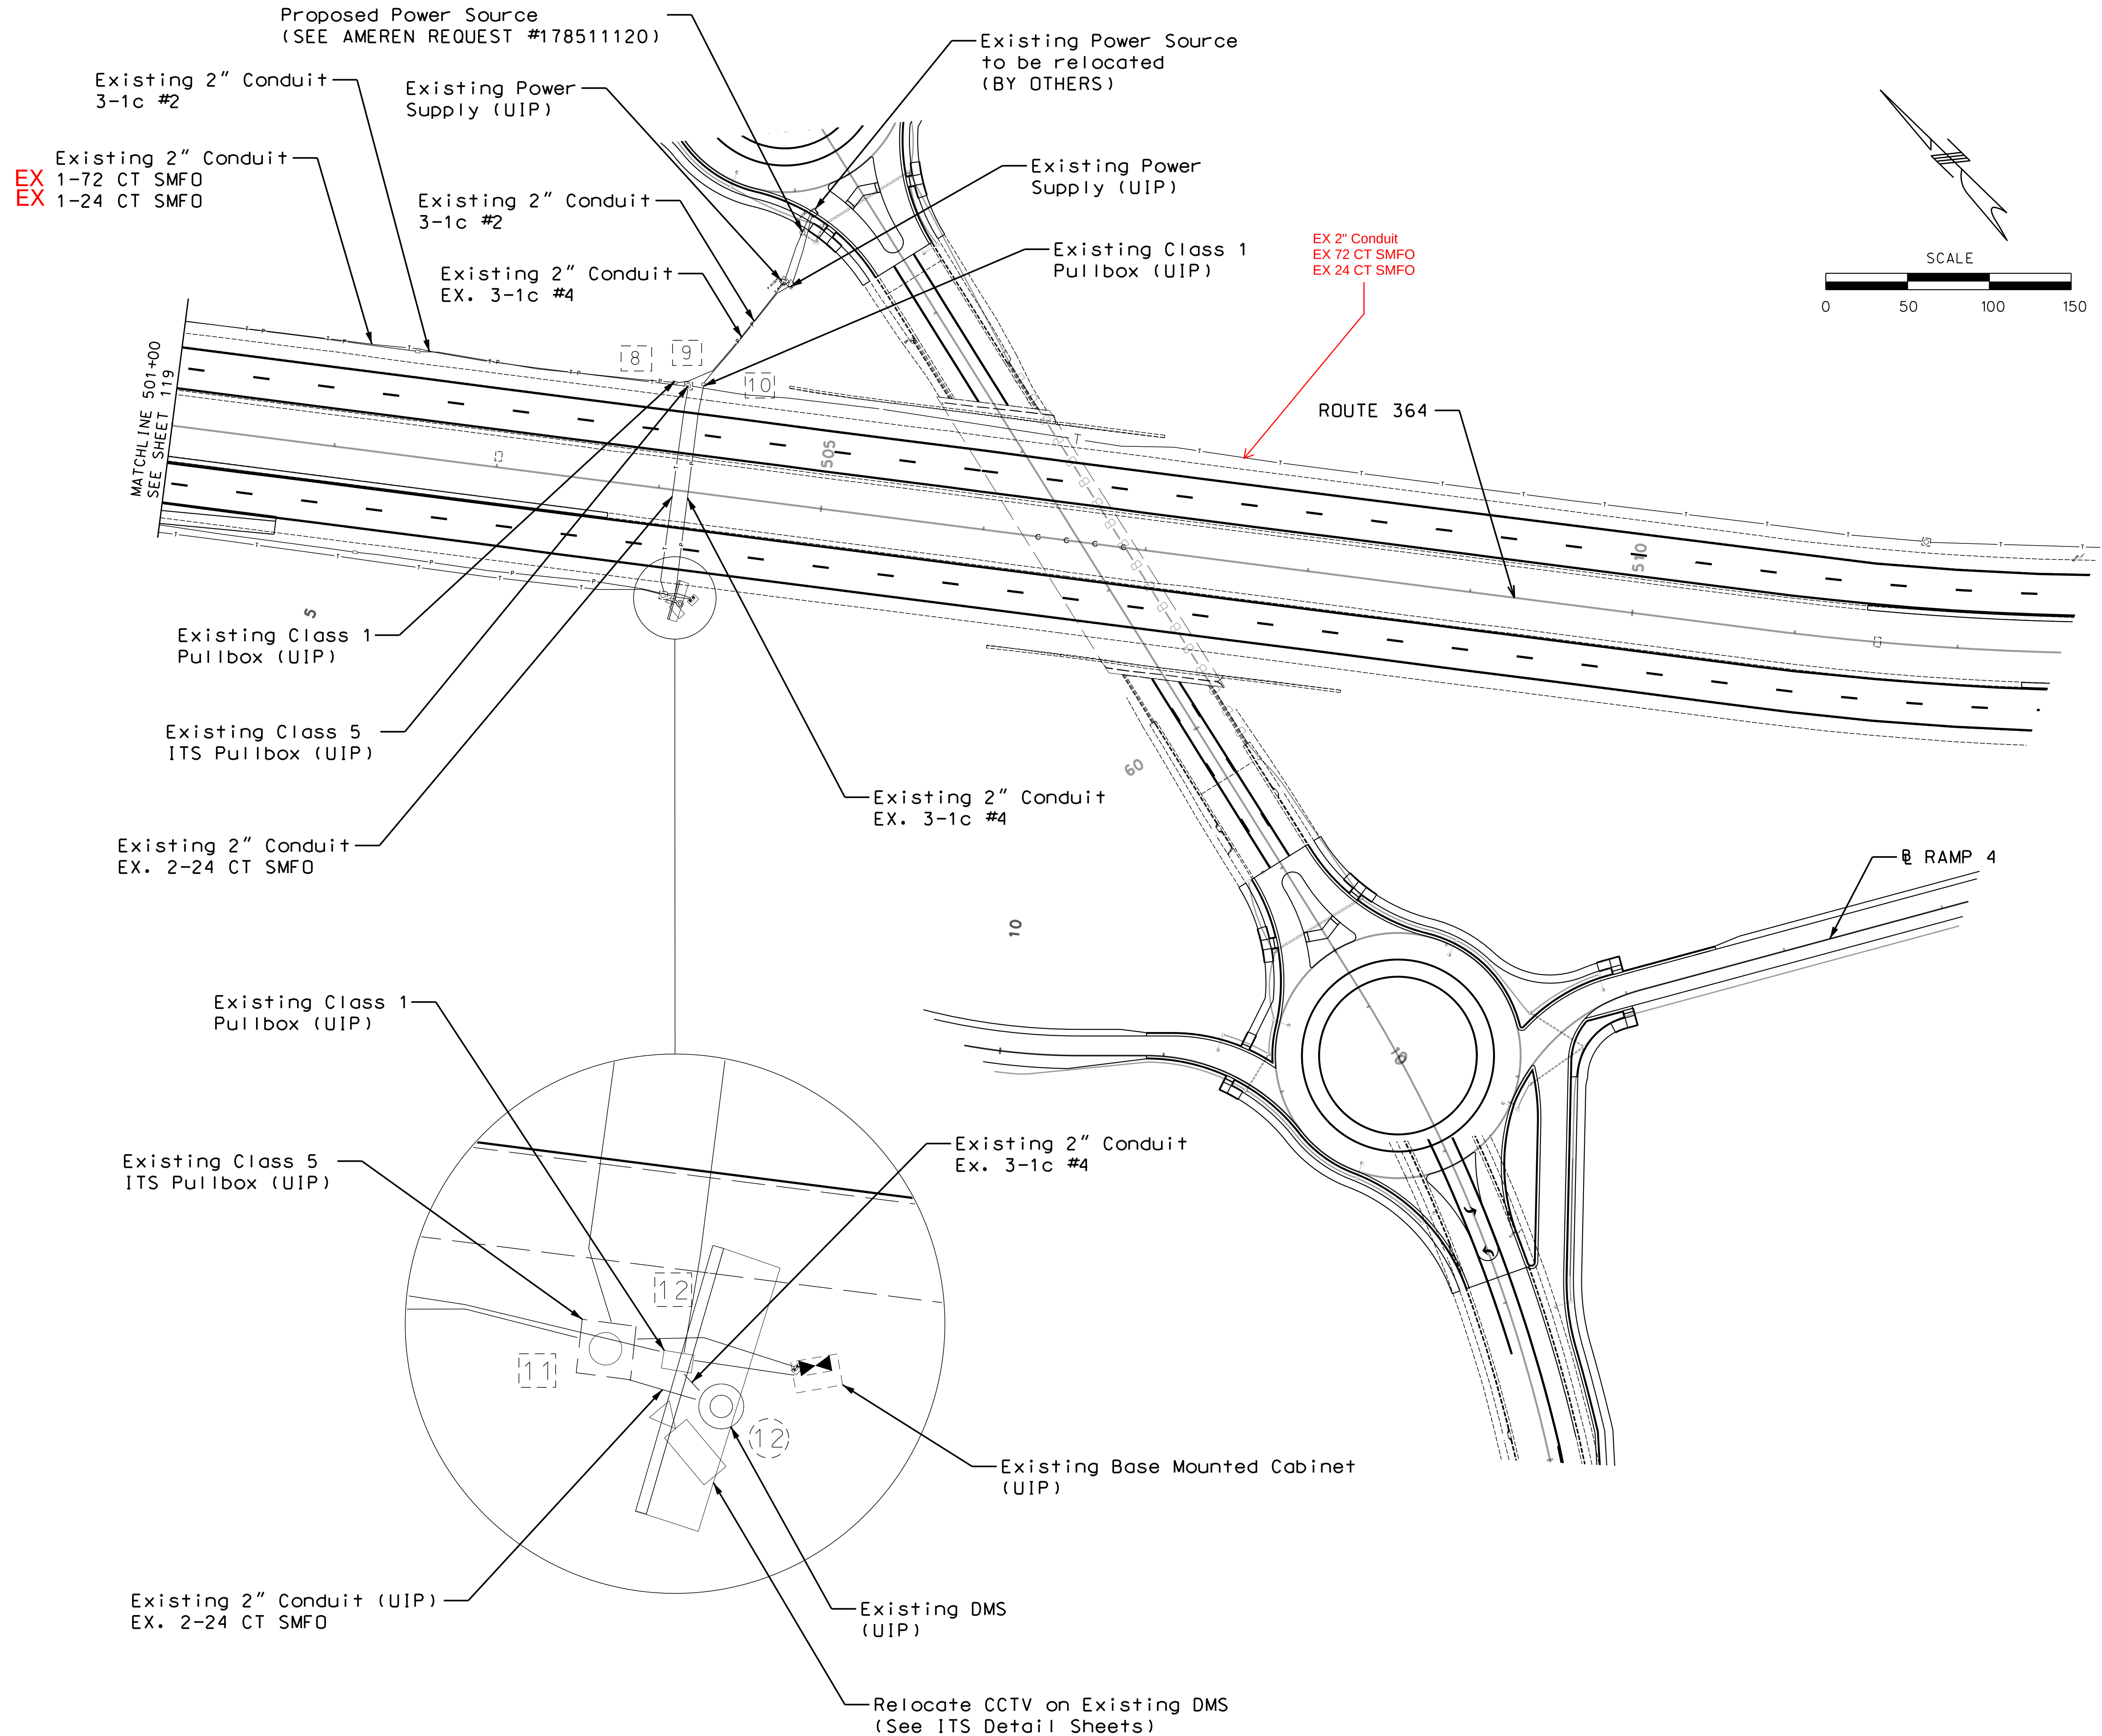

REVISION
FEDERAL ID NUMBER STP-7302 (669)
PROJECT NUMBER J6P3350
GBA PROJECT NUMBER 13659.00
DATE 05/03/2019
DESIGNED: JIF
DRAWN: JIF
REVIEWED KGM
SHEET TITLE ITS SHEET 3 OF 3 ADDENDUM 1
SHEET NUMBER 120

FILE: G:\13659\Micro\Traffic\120 ITS_02_J6P3350_150.dgn
PLOTTED ON 5/6/2019 9:10:43 AM
DRAWN BY: JIF/SERVING