


BUSH HOG® SM60

Side Mount Rotary Cutter

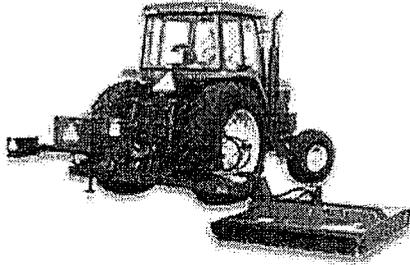

FEATURES:

- Ideal for rights-of-way and pond banks
- 60 inch cutting width
- Cutter head extends out 12 ft. from tractor center line
- Operates from 90° up to 85° down

| SPECIFICATIONS | |
|-------------------------------|---|
| Model | SM60 |
| Cutting Width | 60 inches |
| Transport Width | 125 inches |
| Minimum Tractor Weight | 6000 lbs. |
| Minimum Tractor Lift Capacity | 3200 lbs. (at 24 inches behind lift pins) |
| Hitch | Category II standard, Cat. II & III quick hitch |
| Cutting Capacity | 1 inch |
| Deck Thickness | 10 gauge |
| Blade Holder | Round |
| Type Blades | 1/2 x 3 inches, double edge |
| Blade Tip Speed | 17,300 fpm at 540 rpm |
| Blade RPM | 1101 |
| Blade Rotation | Clockwise, but reversible |
| Cutter Head Movement | 90° up to 85° down |
| Driveline | ASAE Category 4, 540 or 1000 rpm |
| Hydraulic Pump Mounting | Machine only, PTO driven |
| Hyd. Pump Capacity | 35 gallons, factory filled |
| Hydraulic Capacity | 24 G.P.M. - 540 rpm |
| Overload Protection | Hydraulic relief valve |
| Counterweight | 275 lbs. standard |
| Max. Extension of Cutterhead | 145 inches from tractor centerline |
| Extension Arm Travel | 31-1/4 inches |
| Weight | 1675 lbs. |
| Front and Rear Deflectors | Standard equipment |
| Options | Side gauge wheel with solid or lam. tire, tailwheel assy. for mainframe, valve stand, chain shielding |

RHINO DB150

Specifications

| | DB150 |
|--|--------------------------|
| Cutting Width | 60" |
| Cutting Height Range | Dependent Upon 3-Pt Lift |
| Cutting Capacity (Max.) | 1" |
| Min. Horsepower Required (with adequate front weights) | 60 HP |
| Overall Width (Head) | 65-1/4 " |
| Overall Length (Head) | 71-3/8" |
| Transport Width | 119" |
| Tractor PTO | 540/1000 RPM |
| Oil Reservoir Capacity | 55 Gal. |
| Total Oil Capacity | 60 Gal. |
| Blade Tip Speed (FPM) | 20,028 |
| Blade Carrier Type | Pan |
| Maximum Reach (from center line of tractor) | 158" |
| Gearbox Protection | Relief Valve |
| Operation Up/Down | 85 Degrees/90 Degrees |
| Side Skirt | 10 Ga. x 9-1/4" |
| Deck Thickness | 10 Ga. |
| Hitch | CAT II-III Q.H. |
| Replaceable Skid Shoes | Std. |
| Safety Deflectors | Std. |
| Weight (Approx.) | 2140 lbs. |

Extra Equipment

- Open/Closed Center Valve
- High Clearance Hitch Extension
- Rear-Mount Tailwheel
- Hydraulic Valve Mounting Plate
- Side-Mount Gauge Wheel

Optional Equipment

- 540 or 1000 RPM
- Front and Rear Single or Double Chain Guards