

ADDENDUM NO. 2

ISSUED BY: Great River Associates
2826 S Ingram Mill Road
Springfield, Missouri 65804
(417) 886-7171
(417) 886-7591 --- FAX

DATE: January 6, 2016

FOR: CEDAR COUNTY BRIDGE REPLACEMENT
BRIDGE #0630001 OVER CEDAR CREEK
BRO-B020(17)
GRA NO. 14-3368

The attached revisions hereby supersede any and all data with which they may conflict as indicated on the Drawings, Specifications and related documents issued in the original set. Each trade is responsible for changes in its work caused by changes in the work of other trades. This addendum is a part of and shall be attached to the original set of plans and specifications for the work.

Bid Form


On the Bid Form, Fence was removed. Use the attached revised bid form


Sheet C4

The Construction Plans page C4 has been revised with the corrected quantities.

Right-of-Way Plan

Add the attached right-of-way plan to the construction plans.

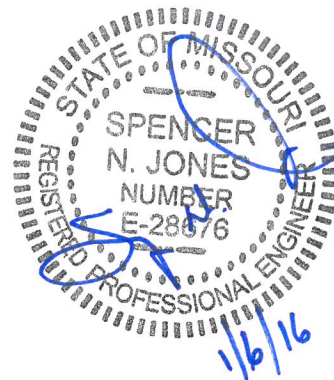



GRE
GREAT RIVER
ENGINEERING

CONTRACTOR NAME: _____
ADDRESS LINE 1: _____
ADDRESS LINE 2: _____
PHONE NUMBER: _____
EMAIL: _____

Cedar County
0630001
BRO-B020(17)


DATE: _____

ITEMIZED BID FORM


LINE	ITEM	DESCRIPTION	UNITS	QUANTITY	UNIT PRICE	AMOUNT
ROADWAY ITEMS						
1	201	CLEARING AND GRUBBING	L.S.	1	_____	_____
2	203	EXCAVATION FOR ROADWAY - UNCLASSIFIED	C.Y.	2118	_____	_____
3	203	EMBANKMENT IN PLACE W/ COMPACTION	C.Y.	441	_____	_____
4	310	5" AGGREGATE ROAD SURFACE	S.Y.	1,127	_____	_____
5	801/805	FERTILIZING AND SEEDING	AC.	0.62	_____	_____
6	802	TYPE 1 MULCH	AC.	0.62	_____	_____
7	616	MOVEABLE BARRICADES	EA.	6	_____	_____
8	616	CONSTRUCTION SIGNS	EA.	4	_____	_____
9	611	TYPE 2 ROCK BLANKET	C.Y.	1142	_____	_____
10	806	EROSION CONTROL FENCE OR SOCK	L.F.	1154	_____	_____
11	806	ROCK DITCH CHECK	EA.	10	_____	_____
12	607	TRANSITION SECTION	EA	4	_____	_____
13	606	CRASHWORTHY END TERMINAL	EA	4	_____	_____
					ROADWAY ITEMS SUBTOTAL	_____
BRIDGE ITEMS						
14	618	MOBILIZATION	L.S.	1	_____	_____
15	206	EXCAVATION FOR STRUCTURES - UNCLASSIFIED	C.Y.	91	_____	_____
16	705	SLAB BEAMS (46'-7 1/2")	EA	12	_____	_____
17	705	SLAB BEAMS (46' - 7")	EA	6	_____	_____
18	1038	PLAIN NEOPRENE BEARING PAD	L.F.	124	_____	_____
19	706	REINFORCING STEEL (SUBSTRUCTURE)	LBS	13,600	_____	_____
20	703	CLASS B-1 CONCRETE (SUBSTRUCTURE)	CY	105	_____	_____
21	702	STRUCTURAL STEEL PILING (HP10X42)	LF	158	_____	_____
22	713	SL-1 BRIDGE RAILING	LF	280	_____	_____
					BRIDGE ITEMS SUBTOTAL	_____
					TOTAL CONTRACT	_____



Curve Table					
CURVE NO.	DELTA ANGLE	RADIUS	LENGTH	CHORD BEARING	CHORD
C1	007°27'15"	300.00'	39.03'	N89°38'14"E	39.00'
C2	008°07'35"	300.00'	42.55'	N89°58'24"E	42.51'
C3	016°45'02"	100.00'	29.24'	S78°47'23"E	29.13'
C4	015°32'56"	100.00'	27.14'	S78°11'20"E	27.05'



Line Table			Line Table		
Line #	Length	Direction	Line #	Length	Direction
L1	20.01'	N03°21'52"E	L6	36.82'	S70°24'52"E
L2	40.00'	S04°02'12"W	L7	67.92'	S85°57'48"E
L3	43.05'	S02°01'51"W	L8	20.00'	S04°02'12"W
L4	37.47'	S02°01'51"W	L9	20.01'	N03°21'52"E
L5	20.59'	S87°09'54"E			

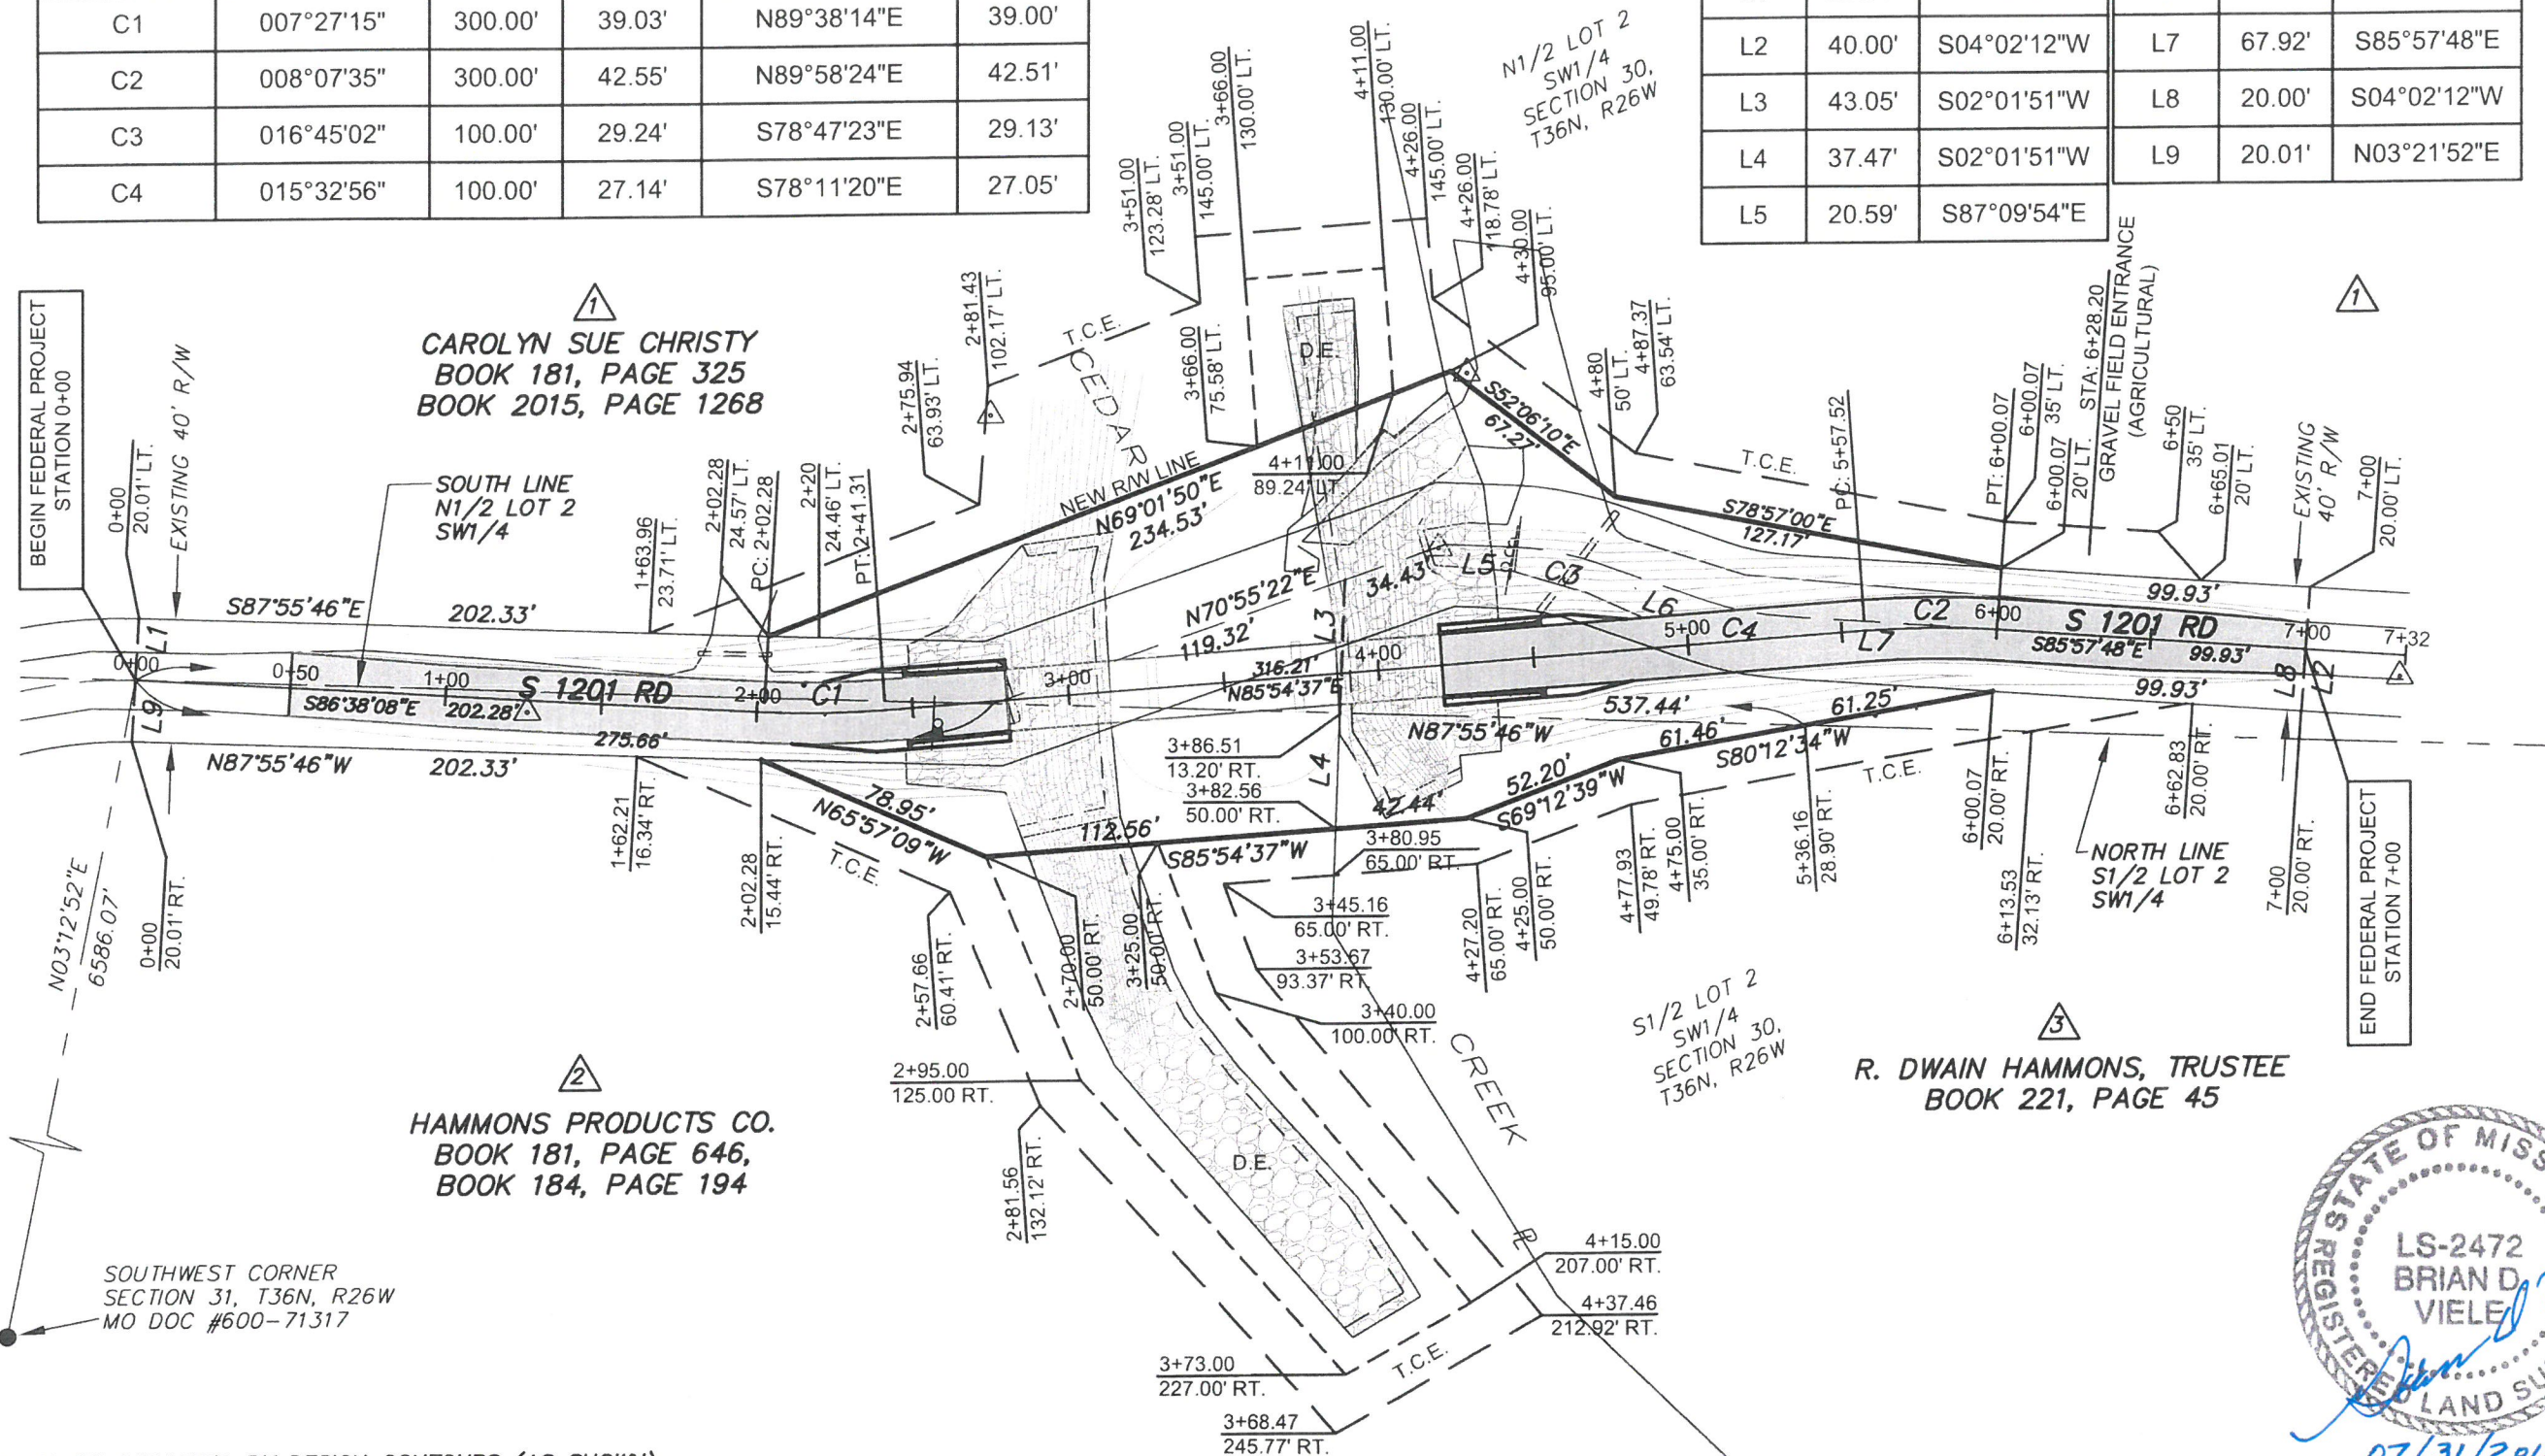

NOTE: GRADING LIMITS INDICATED BY DESIGN CONTOURS (AS SHOWN)

TRACT NUMBER	PROPERTY OWNER	MAILING ADDRESS	SOURCE OF TITLE	EXISTING TRACT AREA	NEW RIGHT OF WAY (R/W)	NEW PERPETUAL DRAINAGE EASEMENT (D.E.)	TEMPORARY CONSTRUCTION EASEMENT (T.C.E.)	REMAINING TRACT AREA
1	CAROLYN SUE CHRISTY	11952 E 220 RD EL DORADO SPRINGS, MO 64744	BK 181, PG 325 BK 2015, PG 1268	17.00 ACRES±	LEFT : 8,770± SQ. FT. (0.201± ACRE) RIGHT : 3,617± SQ. FT. (0.083± ACRE)	2,142± SQ. FT. (0.049± ACRE)	LEFT : 11,671± SQ. FT. (0.268± ACRE) RIGHT : 840± SQ. FT. (0.019± ACRE)	16.716 ACRES±
2	HAMMONS PRODUCTS CO.	PO BOX 140 STOCKTON, MO 65785	BK 181, PG 646 BK 184, PG 194	207.70 ACRES±	LEFT : 138± SQ. FT. (0.003± ACRE) RIGHT : 5,812± SQ. FT. (0.133± ACRE)	9,642± SQ. FT. (0.221± ACRE)	8,925± SQ. FT. (0.205± ACRE)	207.564 ACRES±
3	R. DWAIN HAMMONS, TRUSTEE	PO BOX 140 STOCKTON, MO 65785	BOOK 221 PAGE 45	164.30 ACRES±	LEFT : 1,246± SQ. FT. (0.029± ACRE) RIGHT : 6,113± SQ. FT. (0.140± ACRE)	N/A	3,741± SQ. FT. (0.086± ACRE)	164.131 ACRES±



GRE GREAT RIVER ENGINEERING, INC.
1433 S. HIGHWAY 100, SUITE 100
STOCKTON, MO 65785
(417) 592-1100
www.gre-engineering.com

Date	
Revision/Issue	
No.	

COUNTY ROAD 1201 BRIDGE #0630001 OVER CEDAR CREEK
BRO-B020(17) CEDAR COUNTY, MISSOURI

RIGHT-OF-WAY PLAN

Copyright © 2014 by
Great River Engineering

CHECKED BY: JMW
DRAWN BY: BDV
JOB NUMBER: 14-3368
FILE NAME: 14-3368_RW
SCALE: NOTED
ISSUE DATE:
SHEET NUMBER

RW