


SEE STANDARDS 203.20, 606.00 AND 609.40 FOR SHOULDER WIDENING.

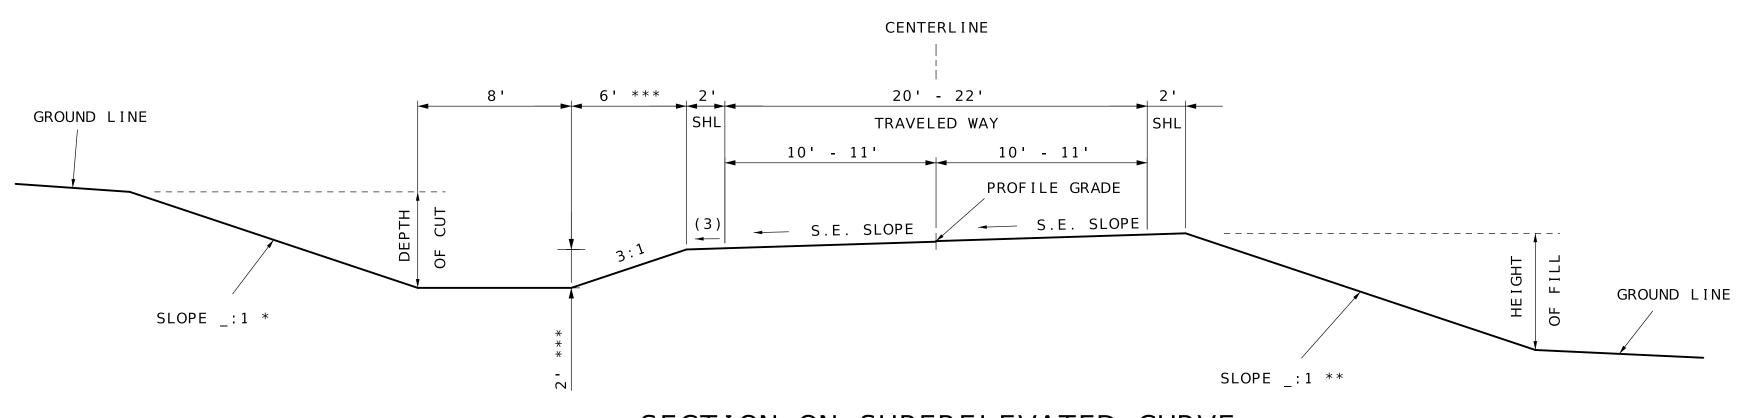

SECTION ON SUPERELEVATED CURVE

TYPICAL SECTION RTE. XX

STA. XXX.XX TO STA. XXX.XX

- \* BACKSLOPE DETERMINED BY SOIL SURVEY.
- \*\* THE FILL SLOPE SHALL BE 3:1 OR FLATTER WHEN THE FILL HEIGHT IS EQUAL TO OR LESS THAN 2 FEET (I.E., THE OFFSET FROM THE TOE OF FILL TO THE SHOULDER POINT IS A MINIMUM OF 6 FEET). THE SLOPE MAY VARY TO MEET THIS REQUIREMENT. FOR FILL HEIGHTS GREATER THAN 2 FEET, THE SLOPE SHALL NOT EXCEED THE MAXIMUM SLOPE DETERMINED BY THE SOIL SURVEY.
- \*\*\* 4' DITCH DEPTH PREFERRED IF ALTERNATE 18" ROCK BASE IS USED. SIDESLOPE WIDTH SHALL BE 12' FOR 4' DITCH DEPTH.

D-66F								
FUNCTION	LOW VOLUME LOCAL ROADWAYS							
ADT	< 400							
TRAVELED WAY WIDTH	20' - 22'							
ROADBED WIDTH	24' - 26'							
FORESLOPE	3:1							
DITCH	2 '							

								ELECTRONICALLY SEALED AND DA	
DATE PREPARED 12/5/2022									
route state MO								ELEC	
С	IST	RIC	Т	SHEET NO.				BEEN	
COUNTY									
JOB NO.									
CONTRACT ID.									
PROJECT NO.									
BRIDGE NO.									
								ON THIS	
DESCRIPTION								IF A SEAL IS PRESENT	
DATE									
HWAYS AND TRANSPORTATION	COMMISSION				105 WEST CAPITOL	JEFFERSON CITY, MO 65102	888-ASK-MODOT (1-888-275-6636)		