



KEYED CONSTRUCTION JOINT (a) APPROXIMATELY ONE-THIRD OF WALL THICKNESS




GRANULAR BACKFILL LIMITS AND MEMBER DIMENSIONS




#### TRANSVERSE JOINT THRU BARREL

PREFORMED FIBER EXPANSION JOINT MATERIAL IN ACCORDANCE WITH SEC 1057 SHALL BE SECURELY STITCHED TO ONE FACE OF THE CONCRETE WITH 10 GAGE COPPER WIRE OR 12 GAGE SOFT DRAWN GALVANIZED STEEL WIRE.


FILTER CLOTH 3 FEET IN WIDTH AND DOUBLE THICKNESS SHALL BE CENTERED ON TRANSVERSE JOINTS IN TOP SLAB AND SIDEWALLS WITH EDGES SEALED WITH MASTIC OR TWO SIDED TAPE. FILTER CLOTH SHALL BE A SEPARATION GEOTEXTILE IN ACCORDANCE WITH SEC 1011. COST OF FURNISHING AND INSTALLING FILTER CLOTH WILL BE CONSIDERED COMPLETELY COVERED BY
THE CONTRACT UNIT PRICE FOR OTHER

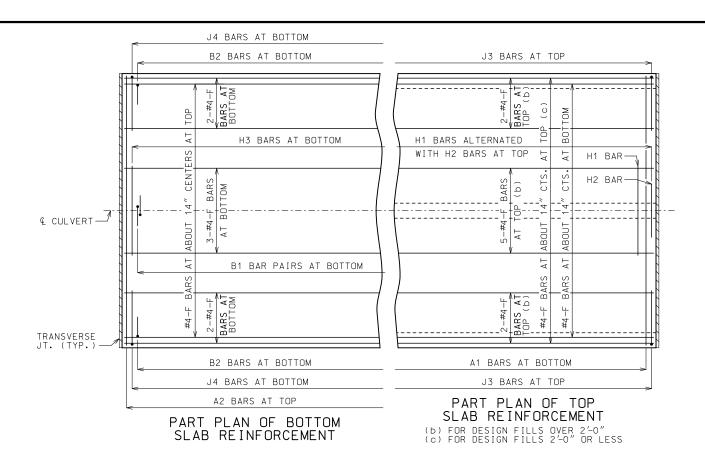

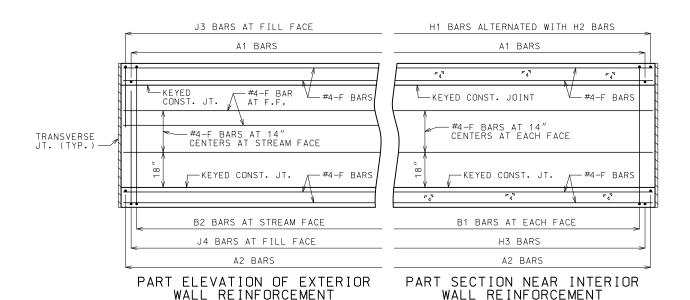

#### #4-F BARS AT ABOUT 14" CENTERS 5-#4-F BARS 2-#4-F BARS J3 BARS-—H2 BARS P 9 L A1 BARS -B2 BARS B1 BARS CULVERT CL KEYED CONST. JOINT (TYP. CL. -A2 BARS J4 BARS-— H3 BARS 2-#4-F BARS 3-#4-F BARS #4-F BARS AT ABOUT 14" CENTERS

BARREL REINFORCEMENT FOR DESIGN FILLS OVER 2'-0" SYMMETRICAL ABOUT AND NORMAL TO & CULVERT.

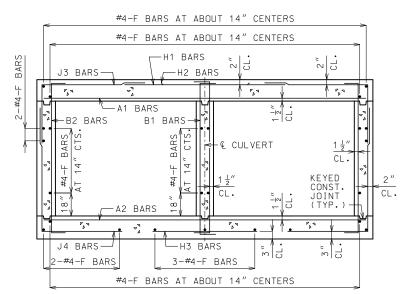

#### BARREL REINFORCEMENT

FOR DESIGN FILLS 2'-0" OR LESS SYMMETRICAL ABOUT AND NORMAL TO & CULVERT.



#### MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL

JEFFERSON CITY, MO 65102 1-888-ASK-MODOT (1-888-275-6636)

# OF MISSO DENNIS W. HECKMAN NUMBER PE-27141 PE-ZI.

## CONCRETE DOUBLE BOX CULVERT

CUT SECTION

THIS SHEET HAS BEEN SIGNED, SEALED AND DATED ELECTRONICALLY.

FOR MEMBER THICKNESS AND FOR BAR SIZES, SPACING AND DIMENSIONS, SEE 703.47.

MISCELLANEOUS:

CONSTRUCTION JOINT KEY NOT SHOWN FOR CLARITY IN PART PLANS, PART ELEVATION AND PART SECTION.

DRAWING NOT TO SCALE, FOLLOW DIMENSIONS,

MINIMUM CLEARANCE TO REINFORCING STEEL SHALL BE 1 1/2

DATE EFFECTIVE: DATE PREPARED: 01/01/2021

703.46

SHEET NO. 1 OF 1

### GENERAL NOTES

DESIGN SPECIFICATIONS: 2010 AASHTO LRFD BRIDGE DESIGN SPECFICATIONS AND 2010 INTERIM REVISIONS

DESIGN LOADING:
VEHICULAR = HL-93 MINUS LANE LOAD, EARTH = 120 LB/CF
EQUIVALENT FLUID PRESSURE = 30 LB/CF (MIN.), 60 LB/CF (MAX.)

DESIGN UNIT STRESSES: CLASS B-1 CONCRETE (BOX CULVERT) f'c = 4.000 PSI REINFORCING STEEL (GRADE 60) fy = 60.000 PSI