

117
RONALD E. COPELAND &
EDNA P. COPELAND
SEE SHEET 25

116
REBECCA SCHEPPER &
FREDRICK D. SCHEPPER
SEE SHEET 25


126
MELVIN FORMBY
850 SF NEW R/W
1,100 SF TEMP. ESM'T.
18,230 SF REMAINING

STA. 8+00.96, 20.37' LT. NEW HAMPSHIRE AVE.
INSTALL 3' X 3' TYPE A CURB INLET (D22)
INSTALL 15" X 8' RCP (N)

STA. 8+11.73, 42.50' LT. NEW HAMPSHIRE AVE.
INSTALL 3' X 3' TYPE A CURB INLET (D21)
INSTALL 15" X 18' RCP (E)

STA. 8+12.00, 21.35' LT. NEW HAMPSHIRE AVE.
INSTALL 4' DIA. MANHOLE (D2)
INSTALL 18" X 30' RCP (N)
CONNECT TO EXISTING CURB INLET

STA. 8+43.88, LT. NEW HAMPSHIRE AVE.
CONSTRUCT STORM INLET MODIFICATION
(INCLUDES REPLACEMENT OF PIPE CONNECTION,
GROUT AND INLET THROAT.)

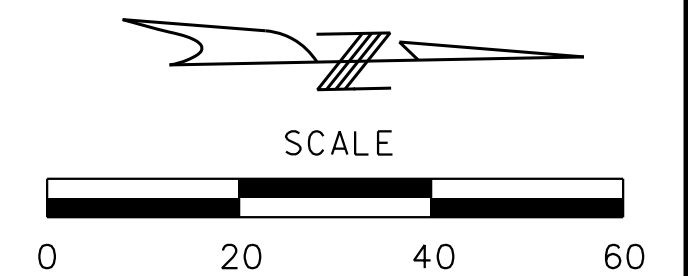

STA. 6+71.19, LT. NEW HAMPSHIRE AVE.
ADJUST MANHOLE

SE1/4 SE1/4
SEC. 11 T27N R33W

LOT 22

116

117
6+60.23
41.50' LT
NEW HAMPSHIRE AVE.
6+60.23
31.50' LT
NEW HAMPSHIRE AVE.
TEMP. ESM'T.
EXIST. R/W
S.L.

SEE SHEET 31
MATCH LINE STA. 6+00

6+46.40
30.88' RT
NEW HAMPSHIRE AVE.
6+46.41
44.88' RT
NEW HAMPSHIRE AVE.
TEMP. ESM'T.

6+60.41
44.87' RT
NEW HAMPSHIRE AVE.

119
KEVIN W. WHISMAN &
AMY B. WHISMAN
NO AQUISITION

118
DAVID A. DOWELL &
JANET L. DOWELL
SEE SHEET 25


STA. 7+97.90, 18.91' RT. NEW HAMPSHIRE AVE.
INSTALL 3' X 3' TYPE A CURB INLET (D3)
INSTALL 15" X 40' RCP (NW)

127
DAVID DOWELL &
JANET L. DOWELL
300 SF NEW R/W
1,000 SF TEMP. ESM'T.
10,040 SF REMAINING

19TH STREET

END NEW HAMPSHIRE AVE.
STA. 8+49.21

NEW HAMPSHIRE AVENUE PLAN
STA. 6+00.00 TO STA. 8+16.00

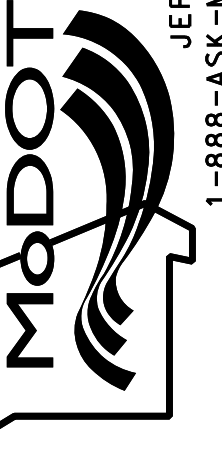DATE PREPARED 9/3/2013	
ROUTE N/A	STATE MO
DISTRICT SW	SHEET NO. 33
COUNTY JASPER	
JOB NO. TDG-3200(718)	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	
DESCRIPTION	DATE
MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION	
	
TRANSYSTEMS CORP. 2400 PERSHING ROAD SUITE 400 KANSAS CITY, MO 64108 PHONE: (816) 329-8600 FAX: (816) 329-8601	
105 WEST CAPITAL JEFFERSON CITY, MO 65102 1-888-ASK-MODOT (1-888-275-6636)	
TRANSystems MO STATE CERTIFICATE OF AUTHORITY # 273 ENGINEERING	