

## ADDENDUM NO. 1

**ISSUED BY:** Great River Associates  
2826 S Ingram Mill Road  
Springfield, Missouri 65804  
(417) 886-7171  
(417) 886-7591 --- FAX


**DATE:** July 3, 2013

**FOR:** CALLAWAY COUNTY BRIDGE REPLACEMENT  
BRIDGE 28700221  
BRO-B014(23)  
GRA NO. 12-3135

The attached revisions hereby supersede any and all data with which they may conflict as indicated on the Drawings, Specifications and related documents issued in the original set. Each trade is responsible for changes in its work caused by changes in the work of other trades. This addendum is a part of and shall be attached to the original set of plans and specifications for the work.

### ITEM 1

The itemized bid form is revised to add a bid item for Type A Guardrail. All bids are to be submitted with the revised itemized bid form.

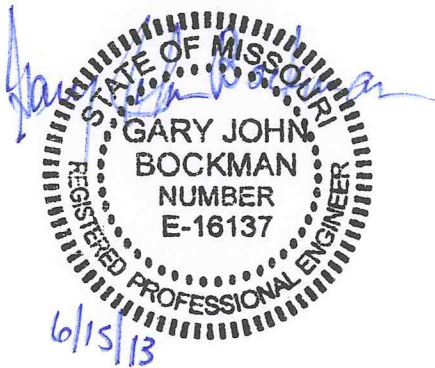



CALLAWAY COUNTY  
BRIDGE NO. 28700221  
BRO-B014 (23)

CONTRACTOR NAME: \_\_\_\_\_  
ADDRESS LINE 1: \_\_\_\_\_  
ADDRESS LINE 2: \_\_\_\_\_  
PHONE NUMBER: \_\_\_\_\_  
EMAIL: \_\_\_\_\_

DATE: \_\_\_\_\_

### BID FORM

LINE	ITEM	DESCRIPTION	UNITS	QUANTITY	UNIT PRICE	AMOUNT
<b>ROADWAY ITEMS</b>						
1	618	MOBILIZATION	L.S.	1	\$ _____	\$ _____
2	201	CLEARING & GRUBBING	L.S.	1	\$ _____	\$ _____
3	203	EXCAVATION FOR ROADWAY - UNCLASSIFIED	C.Y.	320	\$ _____	\$ _____
4	203	EMBANKMENT IN PLACE W/ COMPACTION	C.Y.	5,716	\$ _____	\$ _____
5	310	5" AGGREGATE ROAD SURFACE	S.Y.	902	\$ _____	\$ _____
6	310	4" AGGREGATE BASE (BEHIND GUARDRAIL)	S.Y.	37	\$ _____	\$ _____
7	801/805	FERTILIZING AND SEEDING	AC.	0.12	\$ _____	\$ _____
8	802	TYPE 1 MULCH	AC.	0.12	\$ _____	\$ _____
9	616	MOVEABLE BARRICADES	EA.	4	\$ _____	\$ _____
10	616	CONSTRUCTION SIGNS	EA.	4	\$ _____	\$ _____
11	611	TYPE 2 ROCK BLANKET	C.Y.	698	\$ _____	\$ _____
12	713	6'-3" TRANSITION SECTION	EA.	4	\$ _____	\$ _____
13	713	TYPE A GUARDRAIL	L.F.	25	\$ _____	\$ _____
14	606	25' TERMINAL GUARD RAIL SECTION	EA.	4	\$ _____	\$ _____
15	713	15" Ø CMP	L.F.	54	\$ _____	\$ _____
16	611	EROSION CONTROL FENCE OR SOCK	L.F.	1,518	\$ _____	\$ _____
SUBTOTAL						\$ _____
<b>BRIDGE ITEMS</b>						
17	216	REMOVAL OF EXISTING STRUCTURE	L.S.	1	\$ _____	\$ _____
18	206	EXCAVATION FOR STRUCTURE - UNCLASSIFIED	L.S.	1	\$ _____	\$ _____
19	702	STRUCTURAL STEEL PILING (HP10x42)	L.F.	416	\$ _____	\$ _____
20	705	TYPE IV CONCRETE I-GIRDERS 28' - 8 3/8"	EA	6	\$ _____	\$ _____
21	705	TYPE IV CONCRETE I-GIRDERS 59' - 3 1/2"	EA	3	\$ _____	\$ _____
22	705	PRE-STRESSED DECK PANELS	S.Y.	215.55	\$ _____	\$ _____
23	716	LAMINATED BEARING PADS 10" X 15 1/5"	EA.	12	\$ _____	\$ _____
24	716	LAMINATED BEARING PADS 11" X 15 1/2"	EA.	6	\$ _____	\$ _____
25	706	REINFORCING STEEL (SUBSTRUCTURE)	LBS.	14,570	\$ _____	\$ _____
26	706	REINFORCING STEEL (SUPERSTRUCTURE)	LBS.	24,425	\$ _____	\$ _____
27	703	CLASS B1 CONCRETE (SUBSTRUCTURE)	C.Y.	113	\$ _____	\$ _____
28	703	CLASS B2 CONCRETE (SUPERSTRUCTURE)	C.Y.	135	\$ _____	\$ _____
29	713	SL-1 RAILING	L.F.	250	\$ _____	\$ _____
SUBTOTAL						\$ _____
TOTAL CONTRACT						\$ _____