

ADDENDUM NO. 1

ISSUED BY: Great River Associates
2826 S Ingram Mill Road
Springfield, Missouri 65804
(417) 886-7171
(417) 886-7591 --- FAX

DATE: November 8, 2012


FOR: PETTIS COUNTY BRIDGE REPLACEMENT
BRIDGE 2090031
BRO-B080(26)
GRA NO. 12-3073

The attached revisions hereby supersede any and all data with which they may conflict as indicated on the Drawings, Specifications and related documents issued in the original set. Each trade is responsible for changes in its work caused by changes in the work of other trades. This addendum is a part of and shall be attached to the original set of plans and specifications for the work.

BID FORM

The Itemized Bid Form was not included in the bid documents posted in the plan room.

The attached single page Itemized Bid Form is to be used when submitting bids.

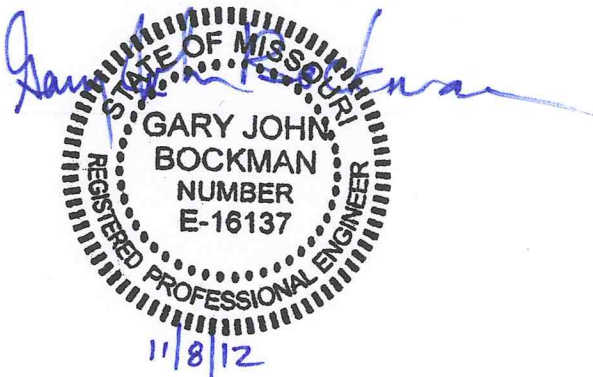



PETTIS COUNTY
BRIDGE NO.20900031
BRO-B080 (26)

CONTRACTOR NAME: _____
ADDRESS LINE 1: _____
ADDRESS LINE 2: _____
PHONE NUMBER: _____
EMAIL: _____
DATE: _____

OPINION OF PROBABLE COSTS

LINE	ITEM	DESCRIPTION	UNITS	QUANTITY	UNIT PRICE	AMOUNT
ROADWAY ITEMS						
1	618	MOBILIZATION	L.S.	1	_____	_____
2	201	CLEARING & GRUBBING	L.S.	1	_____	_____
3	203	EXCAVATION FOR ROADWAY - UNCLASSIFIED	C.Y.	184	_____	_____
4	203	EMBANKMENT IN PLACE W/ COMPACTION	C.Y.	701	_____	_____
5	310	5" AGGREGATE ROAD SURFACE	S.Y.	889	_____	_____
6	310	4" AGGREGATE BASE (BEHIND GUARDRAIL)	S.Y.	31	_____	_____
7	801/805	FERTILIZING AND SEEDING	AC.	0.3	_____	_____
8	802	TYPE 1 MULCH	AC.	0.3	_____	_____
9	616	MOVEABLE BARRICADES	EA.	4	_____	_____
10	616	CONSTRUCTION SIGNS	EA.	4	_____	_____
11	611	TYPE 2 ROCK BLANKET	C.Y.	613	_____	_____
12	607	FENCING (5-STRAND BARBED WIRE)	L.F.	574	_____	_____
13	607	TEMPORARY FENCING	L.F.	696	_____	_____
14	607	WATER GATE WITH ROCK ANCHORS	L.F.	102	_____	_____
15		FIELD ENTRANCE GATE	EA.	1	_____	_____
16	606	12'-6" BRIDGE ANCHOR SECTION	EA.	4	_____	_____
17	713	6'-3" TRANSITION SECTION	EA.	4	_____	_____
18	606	25' TERMINAL GUARD RAIL SECTION	EA.	4	_____	_____
19	611	EROSION CONTROL FENCE OR SOCK	L.F.	318	_____	_____
					SUBTOTAL	_____
BRIDGE ITEMS						
20	216	REMOVAL OF EXISTING STRUCTURE	L.S.	1	_____	_____
21	206	EXCAVATION FOR STRUCTURE - UNCLASSIFIED	L.S.	1	_____	_____
22	702	STRUCTURAL STEEL PILING (HP10x42)	L.F.	50	_____	_____
23	705	TYPE IV CONCRETE I-GIRDERS	L.S.	3	_____	_____
24	705	PRE-STRESSED DECK PANELS	S.Y.	127.7	_____	_____
25	716	LAMINATED BEARING PADS	EA.	6	_____	_____
26	706	REINFORCING STEEL (SUBSTRUCTURE)	LBS.	13,056	_____	_____
27	706	REINFORCING STEEL (SUPERSTRUCTURE)	LBS.	8,674	_____	_____
28	703	CLASS B1 CONCRETE (SUBSTRUCTURE)	C.Y.	53.2	_____	_____
29	703	CLASS B2 CONCRETE (SUPERSTRUCTURE)	C.Y.	60.5	_____	_____
30	713	SL-1 RAILING	L.F.	116.75	_____	_____
					SUBTOTAL	_____
					TOTAL CONTRACT	_____