

Osage County, Route 89 Bridge and Roadway Improvements over Gasconade River Job Number: J5S3284



BRIDGE FACTS:

- Constructed in 1964
- Bridge deck has moderate to severe deterioration

PROJECT FACTS:

- Bridge deck to be removed and replaced, including barriers
- Existing bridge deck: width - 26', length - 793'
- Proposed bridge deck: width - 28', length - 793'
- Proposed roadway improvements: New approach slab and upgraded guardrail

TRAFFIC IMPACTS:

- Full road closure - up to 3 months
- Signed detour route - 47.4 miles in length, utilizing Rte. 50, Rte. A, Rte. 89 & Rte. 28


CONSTRUCTION:

- Construction 2022

ESTIMATED PROJECT COST:


- Estimate construction cost = \$2,000,000

EXISTING BRIDGE TYPICAL SECTION

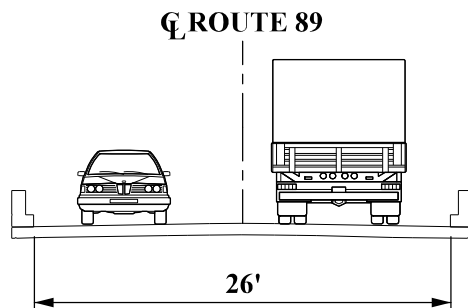

EXISTING BRIDGE DECK:
Route 89, Bridge No. A1411
Construction year: 1964
Bridge length = 793'

PROPOSED BRIDGE TYPICAL SECTION

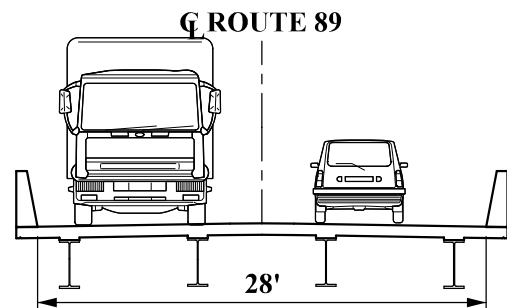

PROPOSED BRIDGE DECK:
Route 89, Bridge No. A1411
Construction year: 2022
Bridge length = 793'

FOR MORE INFORMATION:

www.modot.org/central
573.751.3322 or 1.888.275.6636 (toll-free)
Facebook: MoDOT.Central
Instagram: @MoDOT_Central

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

