
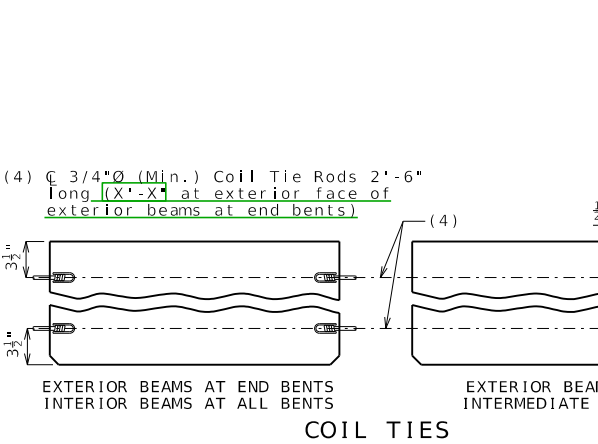
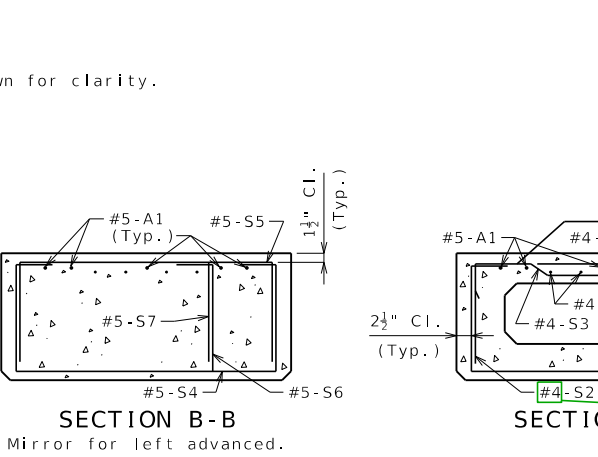
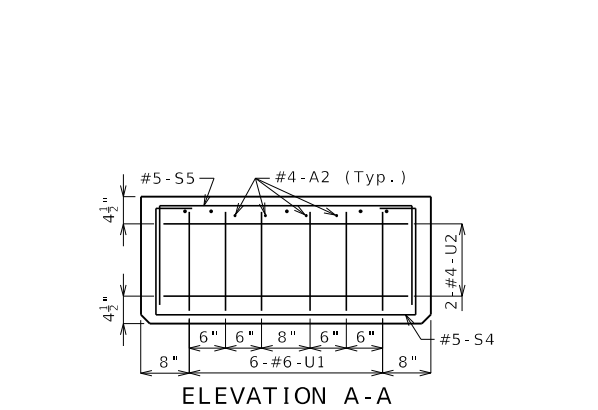


Detailed Checked

Note: This drawing is not to scale. Follow dimensions.

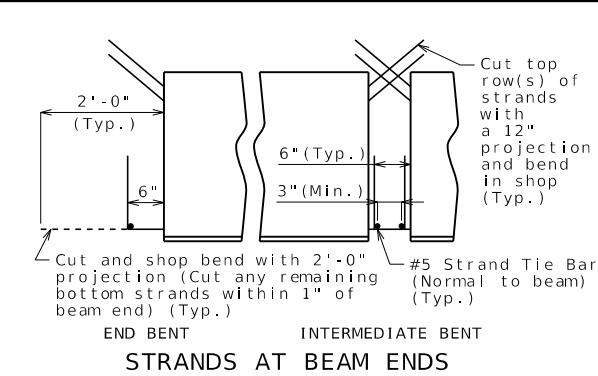

BILL OF REINFORCING STEEL - EACH BEAM									
NO.	SIZE & MARK	ACTUAL LENGTH	SHAPE	BENDING DIAGRAM					
10	5 A1	X'-X"	20	(S1) 3'-7"					
8	4 A2	X'-X"	20	(S4) 3'-8½"					
				(S5) 3'-8½"					
				(S6) 2'-8½"					
				(S7) 2'-8½"					
				(S1, S4, S6) (S5, S7)					
				SHAPE 10S					
				SHAPE 20					
				SHAPE 10S					
				SHAPE 21S					
				SHAPE 50S					
				SHAPE 51S					

All dimensions are out to out. Use symmetry for dimensions not shown.

Hooks and bends shall be in accordance with the CRSI Manual of Standard Practice for Detailing Reinforced Concrete Structures, Stirrup and Tie Dimensions.

Actual lengths are measured along centerline of bar to the nearest inch.

Minimum clearance to reinforcing shall be one inch, unless otherwise shown.

All reinforcement shall be Grade 60.

All S2 bars shall be epoxy coated.

General Notes:

Concrete for prestressed beams shall be Class A-1 with $f'c$ = psi and $f'ci$ = psi.

Use strands, #0 Grade 270, with an initial prestress force of kips.

Pretensioned members shall be in accordance with Sec 1029.

Fabricator shall be responsible for location and design of lifting devices.

Exterior and interior beams are the same except: coil ties, application of bond breaker, coil inserts for slab drains.

For Beam Camber Diagram, see Sheet No. __.

For location of coil inserts at slab drains, see Sheet No. __.

For location of coil ties at concrete bent diaphragms, see Sheets No. __ and __.

DATE PREPARED
4/18/2025

ROUTE
STATE
MO

DISTRICT
SHEET NO.
4

COUNTY

JOB NO.

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

STANDARD DRAWING GUIDANCE (do not show on plans):
(Turn off Level Bridge-Guidance to hide guidance)

- ①

Actual strand arrangement, bent up strands, and debonding (if any) is by design (top two strands are required). Add or remove symbols and instructions as required. Strands may be placed continuously across beam (eliminating 4" space), but dimension to drain hole in Part Plan shall be revised to 10".
- ②

Revise if #5 is required. Use 7'-3" for #5-S1 actual length and 6'-9" for #5-S2 actual length.
- ③

Splices shown only when necessary (girder length > 60'-2"). Use 19" lap for #4 & 2'-0" lap for #5.

When lap is unnecessary:

- Delete grouped elements.

- Extend A bars to $\text{\textcircled{C}}$ Beam.

- Revise 10 to 5 A1 bars & 8 to 4 A2 bars.
- ④

Interior diaphragm, void holes & vent pipe shall be shown only when necessary (when structure may be submerged).

When not necessary:

- Delete the two grouped elements.

- In Half Elev. extend hidden lines to $\text{\textcircled{C}}$ Beam.

- In Part Plan revise remaining dimension to full length of void.
- ⑤

Revise minimum dimension if required by design.
- ⑥

By design. Typically 30.98 kips per 0.5" strand & 43.94 kips per 0.6" strand, rounded to nearest whole kip.
- ⑦

Strand location not available when vent pipe is required.