Standard Drawing Guidance (do not show on plans):

- 1) Remove if not required.
- 2) Use the following values for clearance to top longitudinal bars: 3 \(\frac{1}{8} \)" for #5 bars

SLAB10_44ft_symm

Effective: Jan. 2022 Supersedes: July 2021


- 3" for #6 bars
- $2\frac{7}{8}$ " for #7 bars
- 2 3 for #8 bars
 Use a triple asterisk when
 there are different size
 top bars and add below the
 single asterisk note the
 following (modified as
 needed)(this will be the only asterisk note for CIP

*** 3 1/8" (#5) 3" (#6) 2 7/8" (#7) 2 3/4" (#8)

Clearance value based on the #6 top transverse bar used for this standard slab. Values will need to be revised for other size transverse bars.

- 3 The larger negative moment reinforcement shown is grouped and can be deleted if the negative moment steel is the same moment steel is the same size as the distribution reinforcement. A set of bars the same size as the distribution bars exist behind the larger bars shown, and will become visible when the larger bars are deleted. (No need to resize)
- (4) The subheadings and negative moment bars are grouped and can be deleted for single span bridges. <Ctrl> U to ungroup.
- 5) Place appropriate slab pouring sequence cell and modify as required.


6 Use alternate detail for CIP decks:
For 8" thick slabs, change top dimension to 3 1/4" and center dimension to 2 1/2".



SLAB CONSTRUCTION JOINT

7 Remove for CIP deck

Girder spacing and reinforcement size & spacing shown are not necessarily standard. Follow design.



OPTIONAL SHIFTING TOP BARS AT BARRIER



Alternate detail for Type H barrier

DATE PREPARED

11/10/2021

JOB NO.

PROJECT NO.

SLAB10

105 WEST CAPITOL FFERSON CITY, MO 65102 MODOT (1-888-275-6636)


DISTRICT

BR

MO

SHEET NO

*

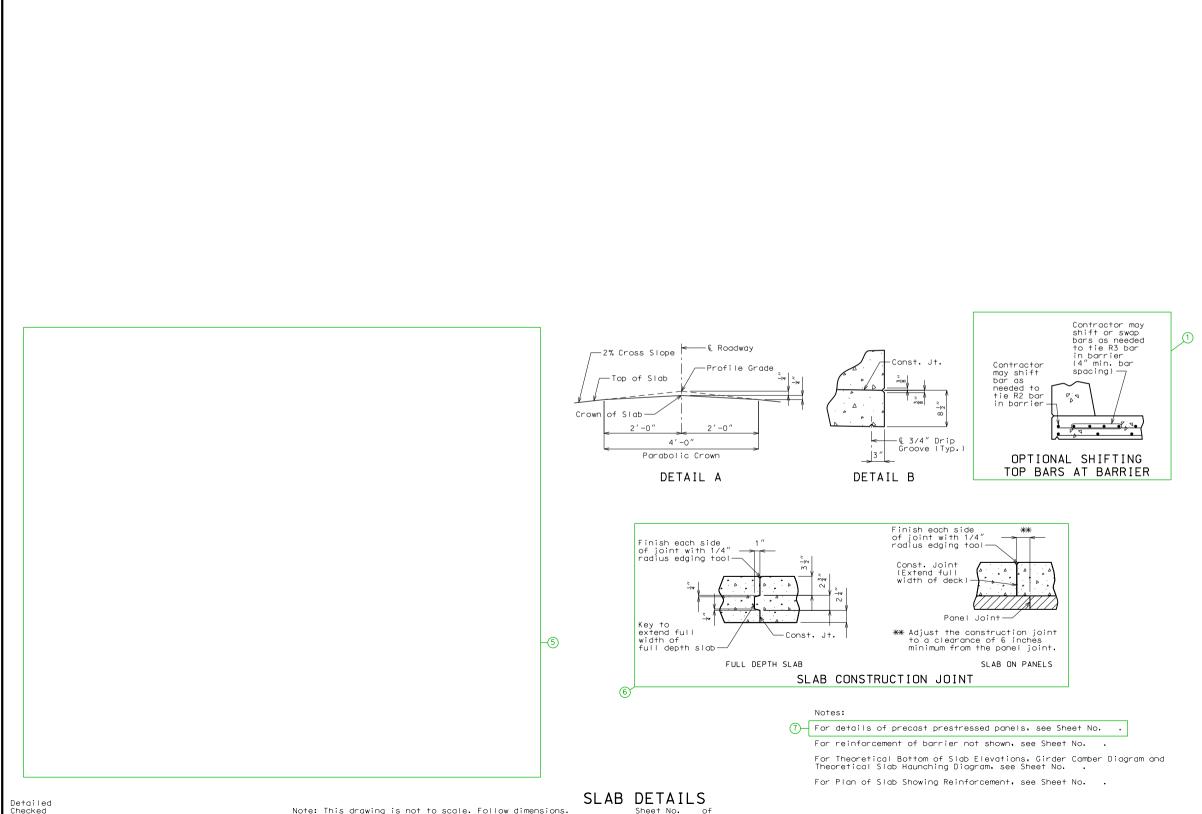

AUXILIARY DETAILS

de

ate G

 \Box

Type 2,3,4

9

уре

 \bigoplus_{Θ}

Bul

 $\overline{\Omega}$

