

# JNW0046\_Nodaway\_VV\_Platte\_River\_R0014

Write a description for your map.

## Legend

- Feature 1
- Feature 2
- Feature 3
- JNW0046\_Nodaway\_VV\_Platte\_River\_R0014\_placemark
- JNW0046\_Nodaway\_VV\_Platte\_River\_R0014\_xtents\_polygon
- JNW0046\_Nodaway\_VV\_Platte\_Rvr\_R0014\_flo\_arrow
- R0014

The section and/or profile lines shown are intended to show location only.

Terminal points of these lines should be based on the information provided by the Bridge Survey Location Request and not on the ends of the lines shown here.

12/19

Job No. JNW0046

Replaces Bridge No. R0014

**Missouri Department of Transportation**  
**Bridge Survey Location Request**

Page 1 to be completed by District staff.

Bridge over: Platte River Route: VV  
 County: Nodaway Section: 22 & 27 Township: 63N Range: 34W  
 Latitude: 40° 14' 33" Longitude: 94° 43' 01"  
 District Contact: Brian Rosenthal Date: August 29, 2023

### HIGH WATER ELEVATIONS AT PROPOSED BRIDGE SITE

Recorded high water elevations or elevation of high water marks

Extreme High Water (EHW) (Give date(s) of occurrence)		
Elevations and date(s) of same	Location	Source of information
954.0	At Bridge	From 1957 Bridge Survey Report
Existing Bridge Overtopped <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Unknown		Existing Roadway Overtopped <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Unknown
		Approx. Overtopping Location(s):

### LOCATION OF NEW BRIDGE

Replace in Existing Location	<input checked="" type="checkbox"/>	Provide details of any proposed changes to profile grade below or as an attachment.
Relocation (near existing Structure)	<input type="checkbox"/>	Provide details of proposed location and grade of the roadway across the floodplain, any proposed/potential channel changes or modifications, etc. below or as an attachment.
New Route	<input type="checkbox"/>	
Other:	<input type="checkbox"/>	

Additional Information:

D.H.W. 955.2 (From 1957 Bridge Survey Report)

From local maintenance supervisor (Dameon Ellis) on 08-29-2023: "Water has never been over the bridge but was close in 1993. Approximately 150 yds North of the bridge the channel is cutting to the East pretty hard and starting to erode the banks. Let me know if I can be of any more help. Thanks"

Page 2 &amp; subsequent pages to be completed by Bridge Division

**Note:** Proposed elevations, distances, etc. are based on the best available data at the time the form was completed. Actual field conditions or recently acquired data may require deviation from the proposed values. Please contact the Bridge Division with concerns regarding the proposed values or if large deviations from these values are required.

**Note:** The information below supplements the survey requirements noted in the EPG, please consult EPG 238 for additional surveying requirements.

Bridge Contact: Wayne Elliott, Phone No. 573-526-5414 & email Wayne.Elliott@modot.mo.gov

Survey Type: **2D Survey**

### Stream Crossing Survey Location Details (2D)

Item	Requirement	Standard Guidance		Specific Guidance	
LIDAR Data (EPG 38.3.36.3.5.1)	Elevation	5' min. Above Extreme High Water [on Overbanks Perpendicular (more or less) to Stream Flow]		Minimum Elevation =	970
	Upstream & Downstream Distance	Contraction and Expansion Limits of Existing/Proposed Crossing		Use Upstream and Downstream Limits shown in Image and kmz files	
Streambed Profiles** (EPG 38.3.36.3.6)	Length	To limits of LIDAR data		Use Standard Guidance	
	Elevation Intervals	Within 500' of Crossing	Natural Stream 25'	Use Standard Guidance	
		Beyond 500' from Crossing	At Vertical and Horizontal Break Points (200' max.)	Use Standard Guidance (see EPG 238.3.36.3.6 if a significant slope change is encountered)	
Bathymetric Channel Sections	Location	At or near the locations shown in the image and kmz files.		Use Standard Guidance Location of sections may be moved to nearby locations that are transition points in width or slope of the channel. Additional sections may be added if more sections are needed to capture these transitions adequately.	
	Orientation	Perpendicular to channel		Use Standard Guidance	
	Terminal Point	Water Surface Elevation or Ordinary High Water Elevation Mark for dry or shallow streams (EPG 127.4.1.1) <b>Note: OHW Mark may be different at each section.</b>		See Bathymetric Channel Section Details Below	

Item	Requirement	Standard Guidance		Specific Guidance
Water Surface Profile (EPG 238.3.36.3.7)	Water Surface Profile Data Needed? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
	Locations with flowing water	Drainage Ditch	100' and 200' each side of Crossing	Use Water Surface Profile Standard Guidance




Item	Requirement	Standard Guidance	Specific Guidance
Existing Bridge Data	Existing Bridge Data Needed? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
	Description	Provide General Description	N/A




Item	Requirement	Standard Guidance	Specific Guidance
Other Bridges (EPG 238.3.36.3.10)	Other Bridge Data Needed? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
	Description	Provide General Description	N/A

## Bathymetric Channel Section Details:

- **Dry or Shallow Streams** - Sections should extend to an elevation equal to:
  - Minimum of the current water surface plus 5',
  - or the Ordinary High Water mark (EPG 127.4.1.1.)
  - May be single row of field shots or cluster of shots near the section location.

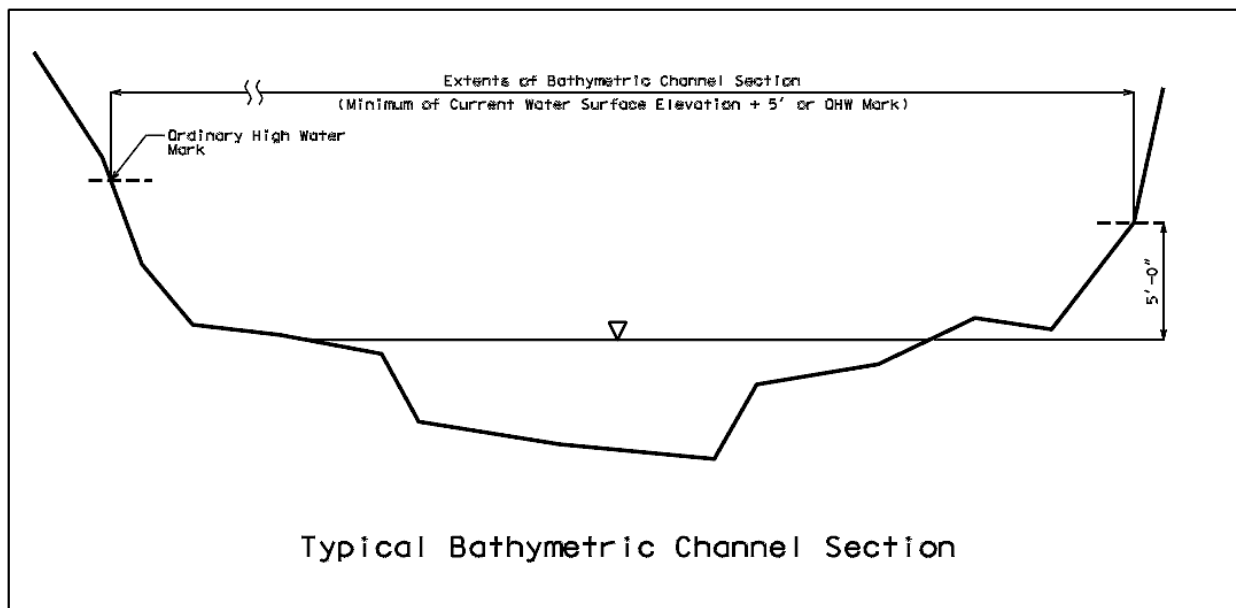

- **Floatable Streams:**
  - Conventional Survey:
    - Sections should extend to an elevation equal to the current water surface elevation.
    - May be single row of field shots or cluster of shots near the section location.
  - Sonar Survey:
    - Data should extend as near to the current water surface elevation as feasible.
    - Example data collection methods are shown below:
      - Scattered data points for the full extent of the survey are preferred.
      - Data points concentrated at survey cross section locations are an acceptable alternative.

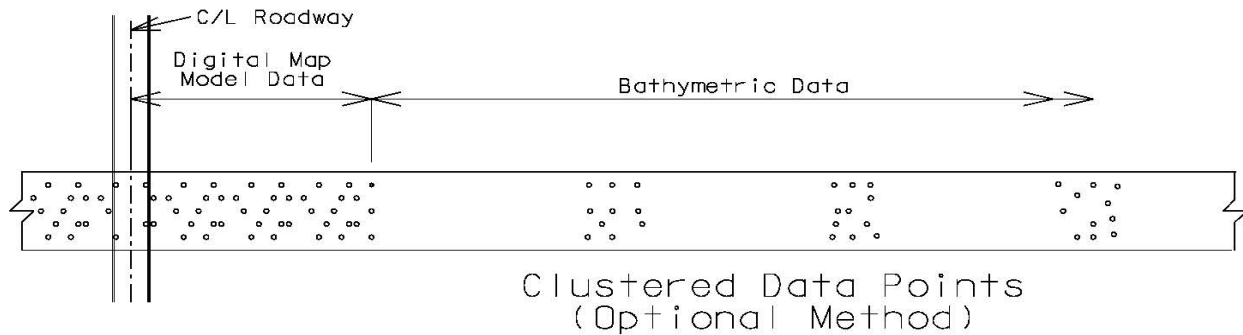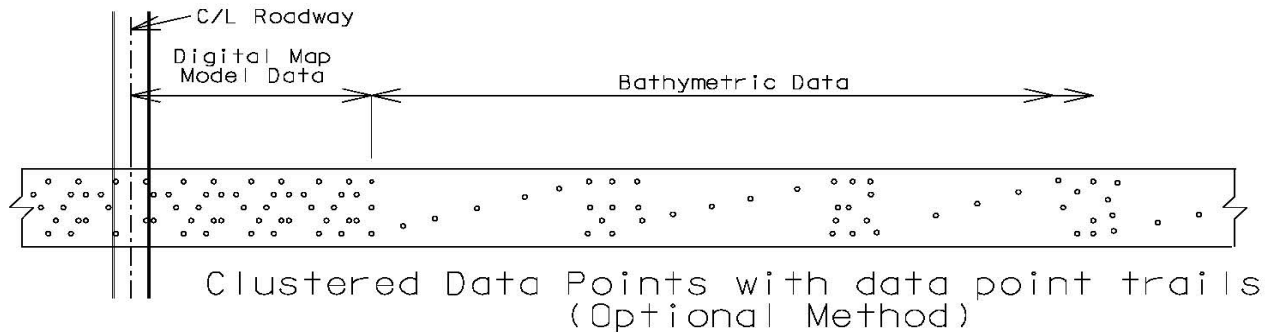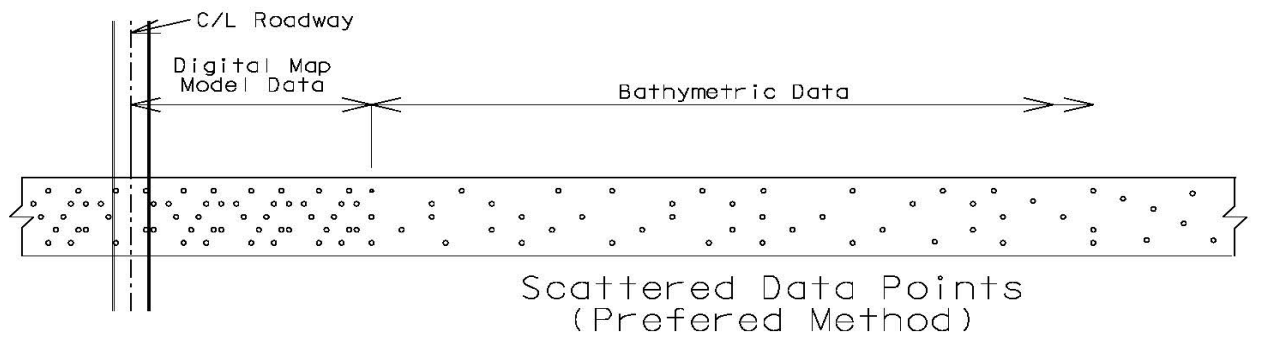

## Example Sonar Data Collection Methods

### Additional Information:

The streambed profile data and bathymetric channel section data should **not** be included in the terrain file. 3rd party LIDAR, MoDOT survey data (conventional or LIDAR) should be provided as separate terrain files.

### Additional Documents Provided:

Image & kmz file showing LIDAR Data Limits and special channel section locations.

Details for Completion of Stream Crossing Bridge Survey				
Item	Requirement	Standard Guidance		Specific Guidance
Centerline and Offset (3 Line) Profiles (EPG 238.3.36.1.3 & EPG 747.2.3.4.1)	Centerline and Offset (3-Line) Profiles Needed? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
	C/L Profile	Terminal Point	Sufficiently Past End of Bridge	Use Standard 3-Line Profile Guidance
	Upstream Offset Profile	Terminal Point	Sufficiently Past End of Bridge	Use Standard 3-Line Profile Guidance
		Offset Distance	On Natural Ground	Estimated Distance = 45 ft.
	Downstream Offset Profile	Terminal Point	Sufficiently Past End of Bridge	Use Standard 3-Line Profile Guidance
		Offset Distance	On Natural Ground	Estimated Distance = 45 ft.
	Special			
Contracted Profile (EPG 747.2.3.4.2)	C/L Profile	Terminal Point of Grade Change		Use Standard Contracted Profile Guidance
	<b>Note:</b> <ul style="list-style-type: none"><li>Only the centerline profile is needed.</li><li>The full centerline profile may be included with 3-Line profile when practical, and the Contracted Profile Sheet eliminated.</li></ul>			

#### Roadway Design Notes for Bridge Survey:

The Bridge Survey should include all the pertinent items listed in [EPG 747](#) and the [Bridge Survey Checklist](#) except for the following:

- Valley Section sheets
- Channel Section sheets
- Water Surface Profile
- Other structures

A geo file will be needed for use in developing the bathymetric terrain in the hydraulic model.

Geo file requirements:

- The geo file should contain:
  - the streambed profile,
  - offset profiles
  - and Bathymetric Channel Section survey data
- In the GEO/HEC Converter spreadsheet the Bathymetric Channel Sections can be placed in either the Valley Section or Channel Section fields.
- If the stream bed profile is not provided, or does not extend to all the sections, use the coordinates and elevation of the low point of channel section as the coordinates and elevations to create a profile or extend the surveyed profile.

#### Bridge Design Notes:

TMS Flood Report Data (none found), FEMA Zone A, Special Conditions. etc.