

CENTERLINE OF ROADWAY

EDGE OF PAVEMENT

EDGE OF TRAVELED WAY  
(4" SOLID WHITE LINE)

EDGE OF PAVEMENT

END 6" CURB AT RADIUS

R10' -40'

4" SOLID WHITE

4" DOUBLE SOLID YELLOW

R10'

5'

10'

5:1 (TYP)

EDGE OF SHOULDER

3

2

4

5

5

1

R50'

6" TYPE M (MOUNTABLE) CURB WITH  
2' WIDE STRIP OF PAVER STONES


4" SOLID WHITE

5

16'

24'

1




R1-2  
YIELD  
48" x 48"

2




R3-2  
NO LEFT TURN  
24" x 24"

3




R4-7  
KEEP RIGHT  
24" x 30"

4

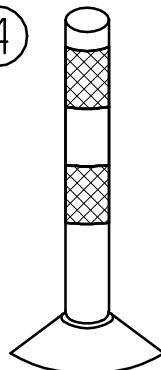

18" FLEXIBLE  
DELINEATOR

5



REFLECTIVE RAISED  
PAVEMENT MARKER  
(STIMSONITE MODEL 88)

NOTES:

1. ALL SIGNS TO BE MOUNTED ON PERFORATED SQUARE STEEL TUBE POST - STANDARD DRAWING 903.03.
2. SIGN HEIGHT TO BE 7' FROM BOTTOM OF SIGN TO EDGE OF PAVEMENT ELEVATION.
3. FLEXIBLE DELINEATORS TO BE LOCATED AT RADIUS POINTS.
4. REFLECTIVE MARKERS TO BE LOCATED ONE AT THE CENTER OF ISLAND NOSE. THEN 2' SPACING ON EITHER SIDE.
5. DRAWING NOT TO SCALE. FOLLOW DIMENSIONS.

STANDARD DETAILS

3 / 4 ACCESS  
ISLAND

(no left turns out)