




BOLT CIRCLE

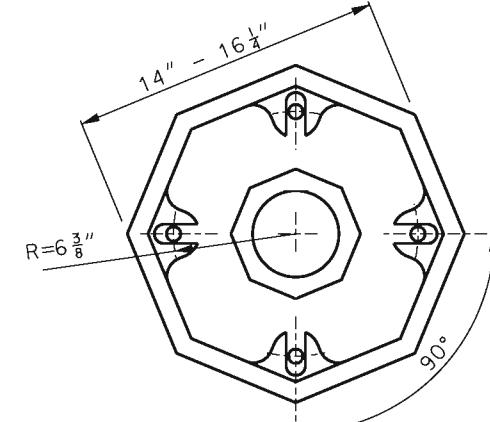


BOLT CIRCLE

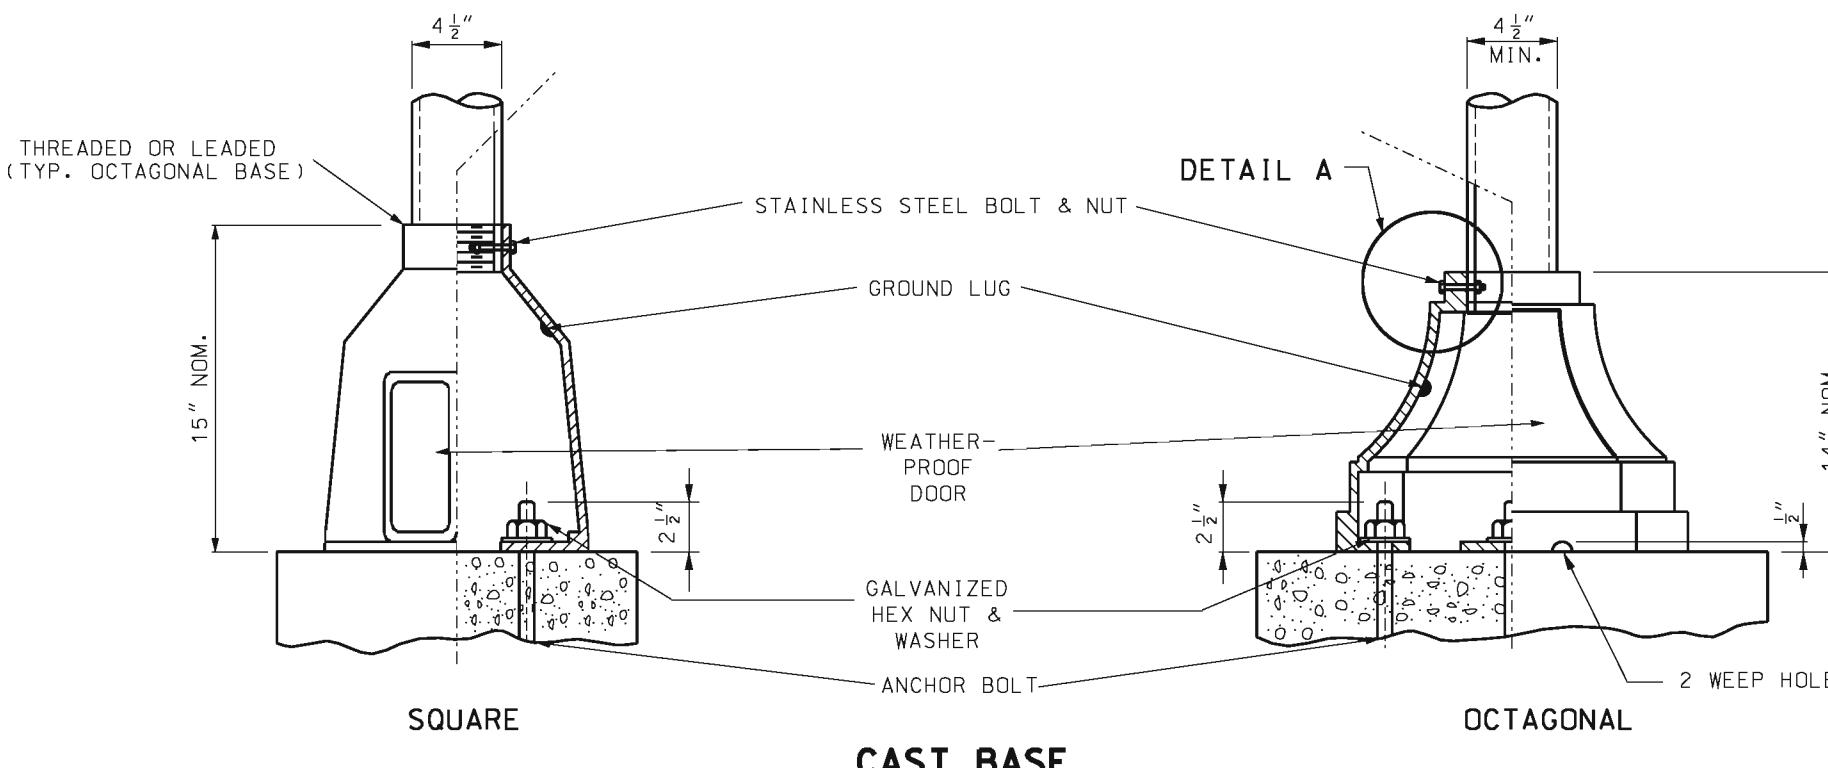


DETAIL A

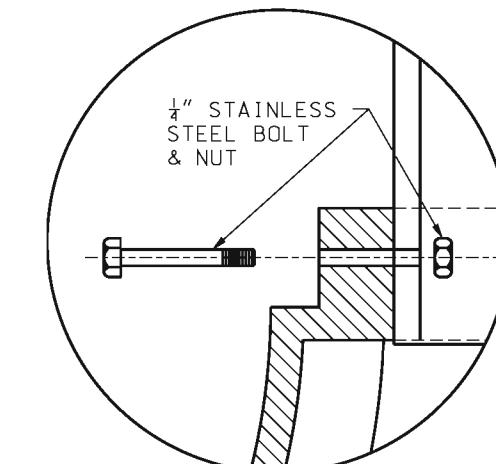

DETAIL A

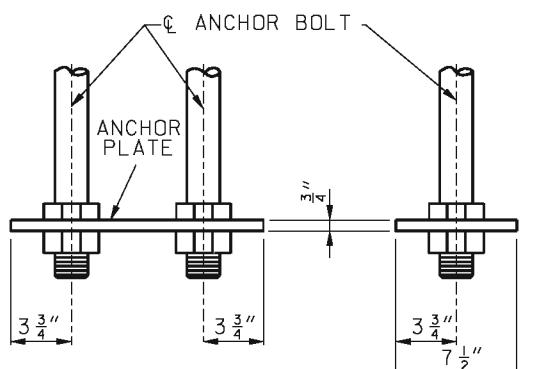

SIDE VIEW

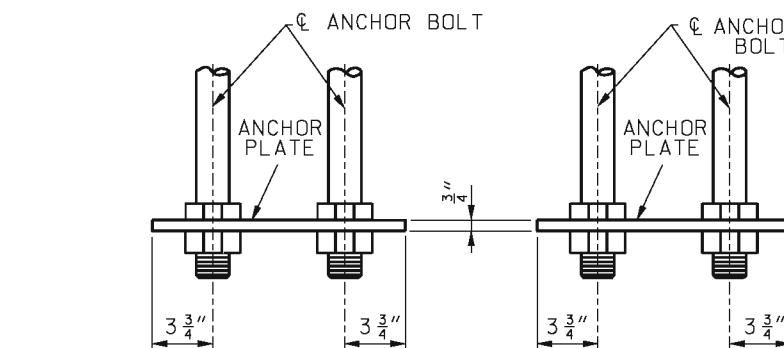


END VIEW

TWO BOLTS PER PLATE
HEX NUT OR $\frac{5}{16}$ " FILLET WELD ALL AROUND BOTH SIDES

FOUR BOLTS PER PLATE
HEX NUT OR $\frac{5}{16}$ " FILLET WELD ALL AROUND BOTH SIDES


OPTIONAL STEEL PLATE FOR ANCHOR BOLTS

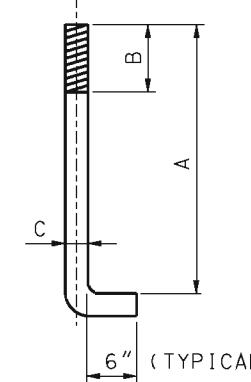

ANCHOR BOLT

NOTE:
ALL ANCHOR BOLTS SHALL BE FULLY GALVANIZED.

| BOLT LENGTH INCHES | VERT. HT. A INCHES | THREAD LEN. B INCHES | DIA. C INCHES |
|-----------------------|--------------------------|----------------------------|---------------------|
| 19 | 17 | 1.50 | 0.625 |
| 57 | 51 | 7.00 | 1.250 |
| 79 | 73 | 7.50 | 1.500 |
| 94 | 88 | 8.00 | 1.750 |
| 121 | 115 | 8.50 | 2.000 |
| 120 | 114 | 9.00 | 2.250 |
| 146 | 140 | 9.50 | 2.500 |



THIS SHEET HAS BEEN
SIGNED, SEALED AND DATED
ELECTRONICALLY.

**TRAFFIC SIGNALS
POST BASES**

DATE EFFECTIVE: 02/01/2008
DATE PREPARED: 8/26/2009

902.30P

SHEET NO.
2 OF 2