


From: [Debra M. Beckwith](#)
To: [BROffice](#)
Subject: Bridge Advertisement (DSI 20-024) Zinc coating mil limits
Date: Thursday, August 27, 2020 7:50:31 AM
Attachments: [image002.png](#)

The [EPG](#) and [Bridge Std. Drawings](#) have been updated as described below:

Implementation Statement: Effective for October letting

Revision Date	Items Revised	Description of Change
Aug. 2020	EPG: 751.50	Updated applicable general notes (EPG 751.50), bridge standard drawings BRG, FING, FLAT, P_COM & STRIP to clearly limit the thickness range of zinc coating to 4 mils minimum and 6 mils maximum. The previous note implied that there is no maximum even though the specs limited the thickness to 6 mils. The 4 mil minimum is a reduction to allow for a practical application range.
	Bridge Standard Drawings: BRG, FING, FLAT, P_COM, STRIP	
	MicroStation Cells: NA	
	Std. Specifications: NA	
	Standard Plans: NA	

Example (Br. Std Dwg BRG shown):

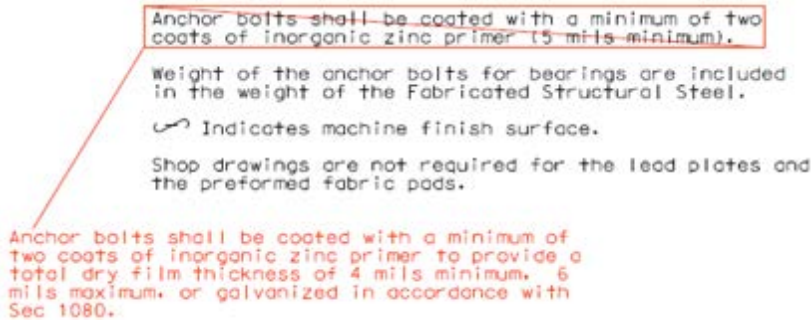

Follow links above for more information, or to view more details about this (or any) revision, use the [Revision Index Database](#).

Instructions:

1. Select the Revision Index Database.
2. Select "Read Only" and Click "O.K."
3. Under Tables (left-hand side) double-click on Table1.
4. Scroll down to the bottom of the list to find the latest Revision.
5. Click on the link under the Effective Date to open the storage location for the Completed Revision.

Debbie M. Beckwith

Structural Specialist
Development Section
Bridge Division
MoDOT
(573)522-8718