

# **MoDOT's National Highway System Transportation Asset Management Plan**

#### Data-driven Decisions for Critical Transportation Assets

page ii

Missouri's transportation system is a tremendous asset. Built by our parents and grandparents and funded by \$55 billion in user fees (it has a \$125 billion replacement value today), it is the nation's seventh largest state highway system – a system that is larger than neighboring states Kansas and Illinois combined.

Missouri's transportation system plays a vital part in the lives of its citizens. It is counted on to safely and reliably connect people with family, jobs and services, businesses with suppliers and customers, students with schools and visitors with destinations.

Missourians have consistently told us that maintaining our transportation assets is their highest priority, and the Missouri Department of Transportation (MoDOT) has a well-established history of maintaining our highways and bridges. Recently we were ranked ninth in the nation in highway performance and cost-effectiveness in the Reason Foundation's 23<sup>rd</sup> Annual Highway Report.

We are steadily losing ground on our number of poor bridges with the count over 900. Some progress has been made on reducing the number of weight restricted bridges; however there are still over 1,200 structures with a restriction.

We are committed to providing a state transportation system that is safe, efficient and reliable. Our emphasis on preservation and maintenance is a major part of that commitment.

Missouri consistently makes sound investment decisions to protect our transportation system. Good use of analytical tools and formal policies allow the state to support investment decisions and try to meet targets for performance and infrastructure condition.

Our Transportation Asset Management Plan establishes the formal approaches to meeting evolving federal guidance with respect to National Highway System pavements and bridges. The plan demonstrates the clear linkages between maintenance and planning efforts and documents our financial planning, risk management, inspection and budgeting processes in a clear manner. This plan will also assist our agency in making the right decisions about where and when to invest funds in infrastructure improvements to sustain the system we have invested in over the years. Maintaining a state of good repair over the life cycle of the assets at a minimum practicable cost is good business practice, helping our state attract new investment and economic growth.

This Transportation Asset Management Plan also identifies potential risks our agency faces related to pavement and bridge condition and how to prevent or mitigate these risks. Doing so will help to allow us to meet our performance targets for years to come.

Working together, we can ensure the department provides a safe transportation system that ensures the mobility of people and goods, enhances economic prosperity and preserves the quality of our environment and communities.

Sincerely,

Patrick K. McKenna MoDOT Director



# **Table of Contents**

Introduction	iv
Purpose	iv
Background	
Goals and Objectives	V
Chapter 1: Asset Inventory and Condition	1-1
System at a Glance	1-2
Asset Management System	1-3
Pavements	1-5
Bridges	1-9
Chapter 2: Performance Measures and Targets	2-1
Pavements	2-1
Bridges	
Overall Performance	2-5
Chapter 3: Life Cycle Planning	3-1
Pavements	3-2
Bridges	
Chapter 4: Financial Plan and Investment Scenario	4-1
Performance Gaps	
Locally-Owned NHS Routes	
Chapter 5: Risk Management	5-1
Financial Risk	5-1
Transportation System Failures	
Natural Disasters	
Chapter 6: TAMP Process and Implementation	6-1
Appendix	A-1
Federal Requirements	
Replacement Cost	
Risk Management	C-1



#### Introduction

Transportation asset management is a strategic framework for making cost-effective decisions about allocating resources and managing infrastructure. It is based on a process of monitoring the physical condition of assets, predicting deterioration over time and providing information on how to invest in order to maintain or enhance the performance of assets over their useful life. MoDOT's Transportation Asset Management Plan is a crucial element in achieving MoDOT's strategic goal of keeping roads and bridges in good condition. The TAMP ensures MoDOT is using taxpayer money wisely by:

- Minimizing life cycle costs,
- Maximizing system performance,
- · Supporting an objective decision making process, and
- Balancing public expectations with limited funding to create a sustainable plan.

An initial plan was developed by department asset experts and planning statisticians based on statewide cost and life-cycles assumptions. That plan was shared with regional staff to adjust those assumptions to actual regional costs and life cycles. Refining and adjusting the TAMP will be a continuous process.

# **Purpose**

MoDOT has adopted a transportation asset management approach to make the best decisions with transportation investments. The TAMP also keeps the department in compliance with the requirements put forth in the federal surface transportation act, known as the Fixing America's Surface Transportation Act or the FAST Act. The details of those requirements can be found in the appendix of this document.

# **Background**

Who We Are: The Missouri Department of Transportation is focused on preserving Missouri's state highways and bridges so they are safe and reliable today and for future generations. This is a daunting task as Missouri has the seventh largest state highway system in the nation totaling 33.859 miles. The state highway system, which includes 10,385 bridges, is critical to Missouri's economic competitiveness and quality of life.



Successful management of the state highway system relies on sound investment planning that considers constituent input, engineering needs and fiscal constraints. MoDOT's inaugural

page v

transportation asset management plan provides direction for preserving this essential transportation system.

MoDOT has a bi-partisan, six member commission that is appointed by the state's governor, but acts independently to provide overall direction and oversight to department leadership.

MoDOT created a performance management system in 2005 that has become a national model. Numerous performance measures are organized around seven Tangible Results Missouri citizens expect from its department of transportation. These results were established based on customer surveys and the department's long-range planning outreach efforts:

- Keep Customers and Ourselves Safe
- Keep Roads and Bridges in Good Condition
- Provide Outstanding Customer Service
- Deliver Transportation Solutions of Great Value
- Operate a Reliable and Convenient Transportation System
- Use Resources Wisely
- Advance Economic Development

MoDOT also tracks its progress through completion of its annual Statewide Transportation Improvement Program (STIP) and other operational plans for individual functions and initiatives.

TAMP Process: MoDOT's current asset management strategies have been in place since 2005. In 2016, MoDOT's asset management planning evolved from a statewide plan to individual district models. Since 2016, each of MoDOT's seven districts maintain an asset management plan for pavements and bridges. These plans have been developed and updated annually by multi-disciplinary teams including bridge, pavement, mobility and maintenance experts along with input from senior leadership, FHWA and regional planning partners. The TAMP was developed by summarzing the latest district asset management plans. More information on the TAMP process can be found in Chapter 6.

# **Goals and Objectives**

The department's asset management plan has been designed to align with MoDOT's Tangible Results. Its objective is keep the state's transportation assets in a state of good repair over the life cycle of those assets at the most practical cost. Missourians continue to place the highest priorities on structurally sound bridges and smooth roads, as does this plan. The state of good repair for this TAMP is defined as maintaining current pavement and bridge conditions for the six federal pavement and brige performance measures over the next ten years. Specifically, the state of good repair goal throughout this document is defined as:



#### **Data-driven Decisions for Critical Transportation Assets**

Federal Performance Measure	Targeted Condition to Maintain State of Good Repair for TAMP
Percent Poor Interstate Pavement	0.0%
Percent Good Interstate Pavement	77.5%
Percent Poor Non-Interstate NHS Pavement	1.0%
Percent Good Non-Interstate NHS Pavement	61.1%
Percent Poor Deck Area on NHS	7.1%
Percent Good Deck Area on NHS	30.9%

The targeted conditions shown in the table above are based on maintaining 2017 conditions with the exception of Percent Good Deck Area on the NHS. In 2017, the Percent Good Deck Area on the NHS was 34.0 percent. Based on deterioration trends, we anticipate the percentage to decline to 30.9 percent in 2020, then remain flat throughout the TAMP. Additional information for performance measures and targets can be found in Chapter 2.

The TAMP supports progress in achieving the national goals in 23 USC 150(b) as shown in the following table.

National Performance Goals	Strategies to Achieve Goal
(1) Safety	The TAMP supports the goals and objectives of Missouri's
	Highway Safety Improvement Program (HSIP) and Highway
	Safety Plan (HSP). Implementing these plans will reduce
	traffic fatalities and serious injuries.
(2) Infrastructure condition	TAMP strategies directly support the infrastructure condition
	goal by maintaining infrastructure in a state of good repair.
(3) Congestion reduction	The TAMP informs the congestion reduction goal by
	identifying available funding for congestion improvements
	after asset management needs are met.
(4) System reliability	Maintaining highway infrastructure in a state of good repair
	supports system reliability.
(5) Freight movement and	Maintaining highway infrastructure in a state of good repair
economic vitality	supports freight movement and economic vitality.
(6) Environmental	TAMP strategies are designed to support existing
sustainability	environmental, project development and STIP processes that
	protect the natural environment.
(7) Reduced project delivery	Implementing the TAMP reduces project delivery delays by
delays	guiding project delivery goals and results.



# **Chapter 1: Asset Inventory and Condition**

Missouri's state highway system includes 33,859 centerline miles of roads and 10,385 bridges. The system is divided into four roadway categories, each of which has its own unique characteristics regarding size, condition and use:

- 1) Interstates
- 2) Non-Interstate NHS Routes (Major Routes)
- 3) Minor routes
- 4) Low volume routes (less than 400 vehicles per day).

The National Highway System (NHS) includes the Interstate Highway System as well as other roads important to the nation's economy, defense and mobility. The NHS was developed by the U.S. Department of Transportation (DOT) in cooperation with the states, local officials and metropolitan planning organizations (MPOs). The interstates and major routes make up Missouri's portion of the NHS.

The final rule in 23 CFR 515 states "a state DOT shall develop a risk-based asset management plan that describes how the NHS will be managed to achieve system performance effectiveness and State DOT targets for asset condition..." The final rule also states "An asset management plan shall include, at a minimum, a summary listing of NHS pavement and bridge assets, regardless of ownership."


This asset management plan will focus only on the NHS, which are the interstates and major routes. Of the 33,859 centerline miles of Missouri's state highway system, 1,380 miles are classified as interstates, and 4,137 miles are major routes. In addition to the state highway system's interstate and major routes, the local system in Missouri also accounts for 265 miles of the NHS. Missouri's is comprised of 5,782 NHS miles with 95 percent of it being on the state system.

# Ownership of the NHS System





# **System at a Glance**

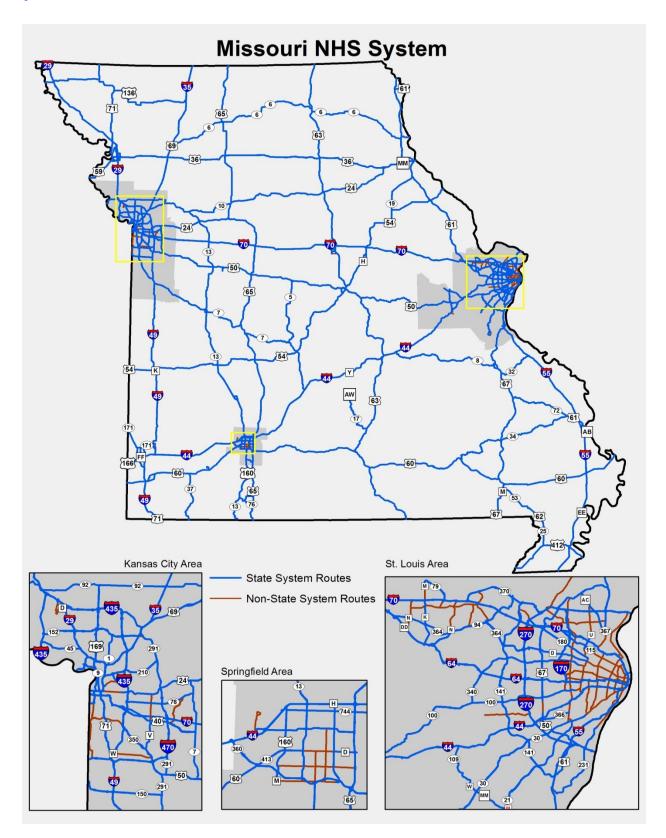



# **Asset Management System**

Transportation Management System (TMS) is the system that houses the Pavement Management System (PMS) and the Bridge Management System (BMS) information used in asset planning. When TMS was implemented in 1998, it only presented information for travelways (routes), safety, traffic and pavement. TMS is now comprised of client/server applications, web-based applications, ReportNet/ Crystal Reports and ArcGis tools and products. Over the years, the number of applications, reports and mapping products has exploded. There is also a component that allows for the addition of photos and documents related to certain inventory items.

MoDOT's TMS applications can be found at http://tms/home/



TMS is ever evolving and improving to aid in taking care of the large highway system in Missouri. The graphic below shows the TMS News that is sent out to keep information up to date and to show those who manage assets the new tools available within the applications.



# TMS News

### Transportation Management System

#### TMS Maps

Now able to search for bridges that have multiple bridge numbers associated to it..

#### Traveler information System

Added new applications of Traffic Bypass and Traffic Bypass Maintenance. These are new applications that activates bypass routes if needed for incidents on IS 70 and IS 44.

#### TMS Reports

New Traffic Impact History Report. New report created for traffic impact history.

#### TMS Modernization and New Applications To Date

The following applications have been modernized:

Asset Management Travelway Overlapping Browser
LRS (Travelway Selection) Adopt A Highway

Outdoor Advertising Travelway Features
Travelway Lane Traffic Management System
Routine Maintenance Inventory Validation

Code Tables Stormwater

Data Zone
Bridge Management System
Maintenance Agreement

Traffic Impact

Data Zone-Crash Prediction Tool Traffic Bypass

ADA Compliance (PROW)

Striping Inventory System
Routine Maintenance
Winter Road Cond
Memorial Map
Traffic Bypass Maintenance
Data Zone—External

For questions regarding TMS or for training needs, please contact the TMS Help Desk at: 578-526-8055 <u>Jeannemarie Lebeau</u> 578-522-8464 <u>Yvonne Wilbers</u>

920-8099 Jeannemarie Lebeau 975-922-8404 Ivonne wilders

#### Missouri Department of Transportation



Updated:

June 26, 2018

#### Did You Know:

- TMS updates will occur July 13, 2018.
- Travelway maintenance will occur July 13, 2018.
- <u>Click here</u> for the most recent travelway maintenance.
- Fatal Crashes Report is updated monthly
- MoDOT Property Damage Crashes Report is updated weekly.
- The MoDOT Maintenance Building layer has been updated in TMS. You can view this layer using the TMS Viewer or ArcGIS. To add the layer. Click on Add TMS Data icon, click on Area, click on MoDOT Locations and click on Mo-DOT Maintenance Buildings.

#### Missouri Department of Transportation

#### Transportation Planning

105 West Capitol Ave. PO Box 270

Jefferson City, MO 65102


573-526-8052 (Fax)

Our Mission is to provide a world-class transportation system that is safe, innovative, reliable and dedicated to a prosperous




#### **Pavements**

MoDOT administers a transportation management system (TMS) to store pavement and bridge asset data, which includes a location referencing system, condition data and videos. Pavement data for all state owned NHS routes and locally owned NHS routes are collected annually. MoDOT uses an Automatic Road Analyzer (ARAN) vehicle (inset photo) to collect the pavement condition data and video of each route. This information is critical to managing MoDOT's pavement and bridge assets. A screenshot of the ARAN viewer software is shown below.

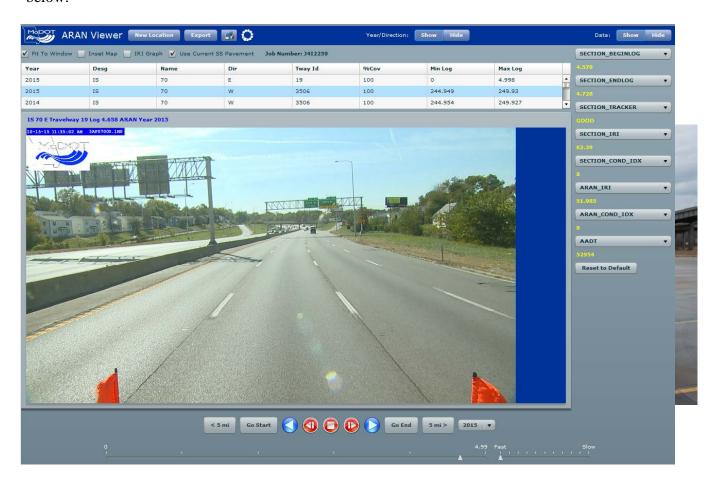


TMS applications (as shown on the following page) capture and store all historical pavement data. MoDOT pavement experts then query this historical information and analyze the data using spreadsheets to determine how well the pavement has performed and to establish future pavement deterioration rates for pavement sections. TMS is MoDOT's Pavement Management System (PMS) as it has multiple applications that aid in establishing the deterioration rate of pavements.



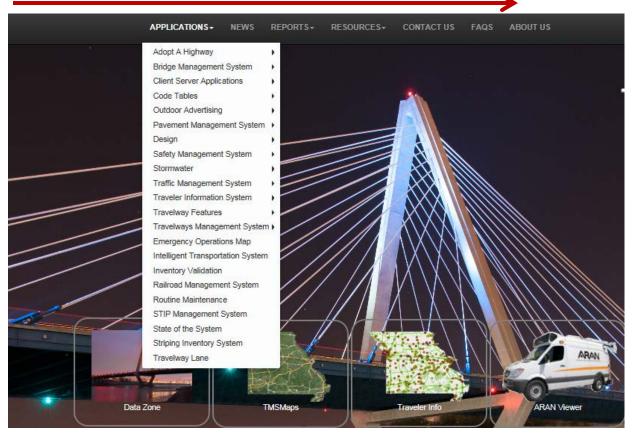


TMS provides historic condition data that is used to forecast future deterioration for pavements. The data on the following chart illustrates the data used to develop future deterioration forecasts.

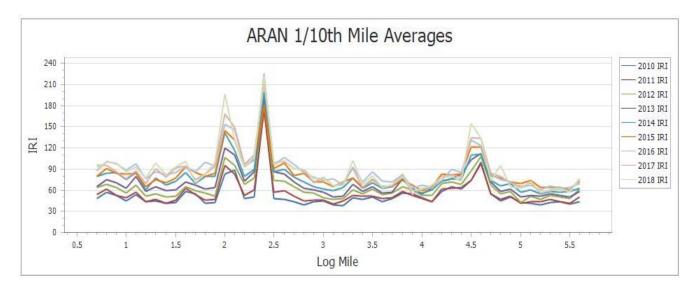



The pavement planning tool within TMS (as shown below) has the ability to indicate pavement sections that need attention by year. These identified pavement sections are then further analyzed by MoDOT pavement engineers to determine right treatment for the condition. These pavement sections are then considered for programming in the 5-year STIP.

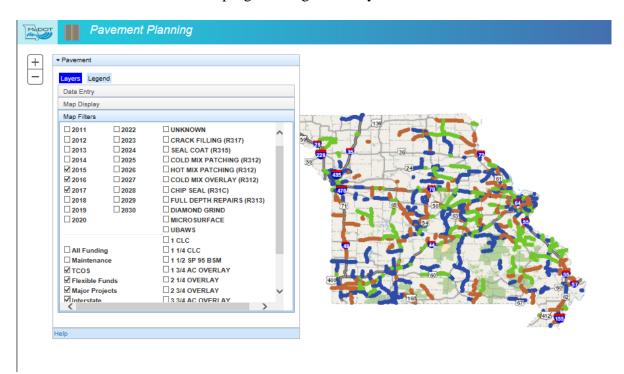

MoDOT has historically analyzed pavement data and tracked progress of pavement by smoothness. Smoothness is measured by international roughness index (IRI), the lower the IRI, the smoother the road. Shown below are the MoDOT rating categories for NHS pavements for smoothness:

#### **NHS Pavement Smoothness Condition Categories**

IRI <100 = Good Condition	
IRI > 100 = Not Good Condition	

The **interstate system**, (e.g., I-70, I-44, I-55) currently has 92 percent of the miles in good condition for smoothness. **Major routes** (e.g., U.S. 36, U.S. 50, U.S. 60 and U.S. 63) currently have 91 percent of the miles in good condition for smoothness. **Total NHS System** currently has 92 percent of the miles in good condition for smoothness.

On May 20, 2017 the Federal Highway Administration (FHWA) released the final rule establishing performance measures for State DOTs and MPOs to assess the condition of pavements on the NHS. The performance measures will report good and poor condition based upon the metric thresholds identified in the final rule as depicted below. To be considered "good" the pavement must rate good in all categories. To be considered "poor" the pavement must rate poor in at least two categories. All other combinations of ratings are considered "fair".



Metric Thresholds for Pavement Condition			
Rating	Good	<u>Fair</u>	<u>Poor</u>
IRI (inches/mile)	<95	95-170	>170
PSR* (0.0-5.0 value)	>4.0	2.0-4.0	<2.0
Cracking Percent (%)	<5	**CRCP: 5-10, Jointed: 5-15, Asphalt: 5-20	>10, >15, >20
Rutting (inches)	<0.20	0.20-0.40	>0.40
Faulting (inches)	<0.10	0.10-0.15	>0.15

<sup>\*</sup>Present Serviceability Rating (PSR) may be used only on routes with posted speed limit <40mph.

Beginning in calendar year 2017, MoDOT began collecting additional pavement data in order to be in compliance with the FHWA final rule for managing pavement condition. The data collected for all NHS routes in 2017 included data for rutting, cracking and faulting in addition to the IRI data MoDOT historically collected. With the new data, MoDOT will be able to rate and analyze pavement not only on smoothness but also on the structural integrity of the pavement.

After analyzing the NHS system in Missouri based on the metrics identified by FHWA in the final rule, the following conditions resulted.

Current Condition of Missouri NHS Routes					
	State Owned	Local Owned	Total		
% of Interstate in Good Condition	78%	n/a	78%		
% of Interstate in Poor Condition	0%	n/a	0%		
% of Non-Interstate NHS 65% 12% 61%					
Pavements in Good Condition					
% of Non-Interstate NHS 0% 11% 1%					
Pavements in Poor Condition					

For further information on the performance measures and targets for Missouri's NHS Routes, see Chapter 2 of this asset management plan.

<sup>\*\*</sup> CRCP - Continuous Reinforced Concrete Pavement



### **Bridges**


Missouri's NHS system includes 3,643 bridges which can be categorized as either a major bridge or typical bridge (including culverts). A major bridge is any bridge that has a length greater than 1,000 feet, while a typical bridge has a length less than 1,000 feet. Missouri has 166 major bridges on the NHS and 3,477 typical bridges on the NHS, for a total of 3,643 bridges on the NHS. The NHS bridges range in age from one to +100 years old.

Number of NHS Bridges (Source: 2016 NBI Data)

	State Owned	Locally Owned	Total
Major	165	1	166
Typical	3,392	<u>85</u>	<u>3,477</u>
Total	3,557	86	3,643

#### Square Foot of Bridge Deck on NHS

	State Owned	Locally Owned	Total
Major	20,162,605	113,520	20,276,125
Typical	33,771,566	979,617	34,751,183
Total	53,934,171	1,093,137	55,027,308

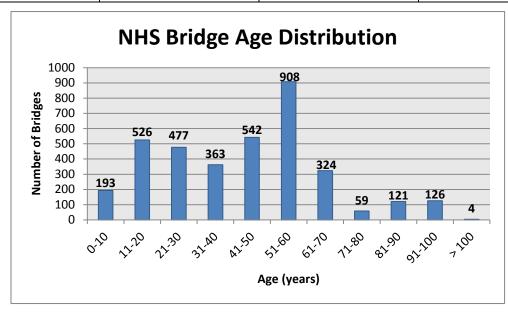

The average length of an NHS major bridge in Missouri is 2,235 feet, over ten times the length of a typical bridge, which averages 205 feet. In total, the length of Missouri's span-type bridges on the NHS is over one million feet.

All bridges are inspected regularly in accordance with federal law, typically every two years. If a bridge has known problems, it is inspected more frequently. According to the National Bridge Inspection Standards (NBIS), condition ratings are used to describe an existing bridge or culvert compared with its condition if it were new. The ratings are based on the materials, physical



condition of the deck (riding surface), the superstructure (supports immediately beneath the driving surface) and the substructures (foundation and supporting posts and piers).



A condition rating is assigned for the bridge's deck, superstructure and substructure. The lowest rating of the three components is considered the bridge rating. This also applies to culvert condition rating – item 62.


#### The rating scale is:

9 – Excellent; 8 – Very Good; 7 – Good; 6 – Satisfactory; 5 – Fair; 3 or 4 – Poor; 2 or less – Closed

NBIS	Thresholds for	Number of	Square Foot of
	Bridge	NHS Bridges /	Bridge Deck on
	Condition	Material Type	NHS
9		Concrete:	
8	Good	1,255	19,794,713
7		Steel: 832	
6	Fair	Concrete: 958	21 260 609
5	rair	Steel: 449	31,260,698
4		Concrete: 63	2 071 909
3		Steel: 86	3,971,898
2	Poor	0	0
1		0	0
0		0	0
Total		3,643	55,027,309



TMS applications house each bridge location and data as shown below.

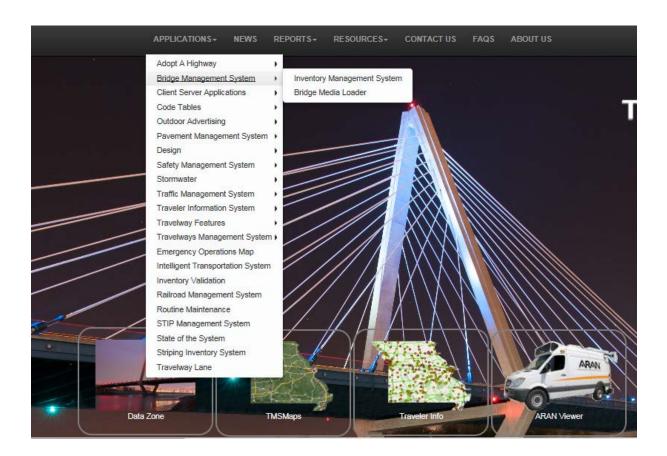


The bridge TMS applications with the bridge NBIS data gathered from field inspections make up the Bridge Management System (BMS). MoDOT has collected and maintained inventory and condition information on National Bridge Inventory (NBI) structures since 1971. An NBI structure is defined as a bridge or culvert that has an opening of at least 20 feet along the centerline of the roadway, is open to the public, and carries vehicular traffic as per 23 CFR 650. MoDOT uses our Transportation Management System to manage our bridge data including inventory and inspection information.

The vast majority of bridges in Missouri are inspected by MoDOT personnel with a small number inspected by consultants or by the local bridge owner. Most are inspected on a two year frequency while a few are done more frequently. MoDOT has worked with FHWA to develop criteria for inspecting some lower risk structures on a 48 month frequency. This is a tool available to our District Bridge Engineers to help reduce the bridge inspection workload.

Historic deterioration rates for all bridges, as shown in the tables on the following page, are available in TMS. Similar to the pavement management system, TMS provides historic condition data that is used to forecast future deterioration for bridges. The data on the following chart illustrates the historic data used to develop future deterioration forecasts. The future deterioration




forecasts are used to establish targeted annual bridge repairs needed, by work type, for each MoDOT district.

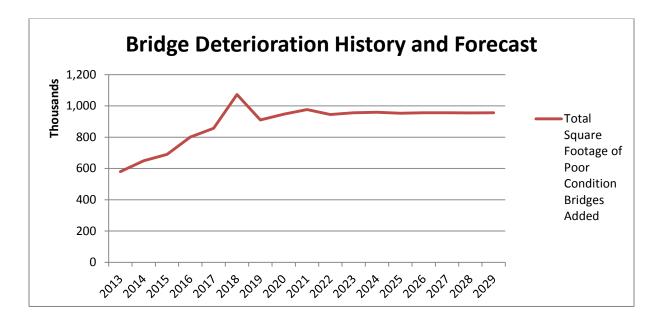

Historically, a 50-year service life was anticipated for bridges; however, starting in 2010, structures are anticipated to have a 75-year service life. Major bridges designed since 2000 are anticipated to have a 100-year service life. One of the challenges with managing our bridge assets is we have a wave of bridges built in the 1950's and 1960's that are all reaching the end of their service life at about the same time.

As required by MAP 21, we also track the square feet of bridge deck of bridges on the NHS that are Structurally Deficient:

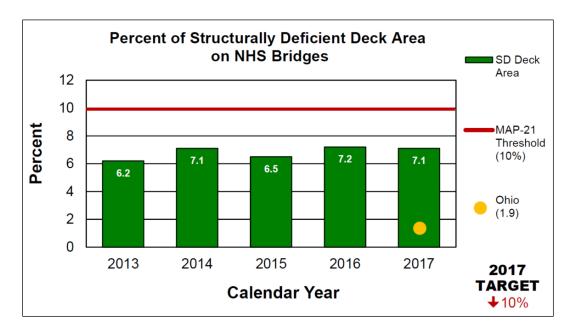



When programming bridge work, MoDOT takes a multi-pronged approach with varying work types. With the amount of poor bridges in Missouri, several replacements or redecks are needed per year; however, it is more cost effective to spend a portion of the limited funds on keeping Fair bridges Fair and Good bridges Good. This is done through a combination of rehabilitations and preventive maintenance projects. The expected life is 7 - 20 years for bridge rehabilitation.

For further information on the performance measures and targets for Missouri's NHS Bridges, see Chapter 2 of this asset management plan.



# **Chapter 2: Performance Measures & Targets**

The final rule in 23 CFR 515 states that "a state DOT shall develop a risk-based asset management plan that describes how the NHS will be managed to achieve system performance effectiveness and State DOT targets for asset condition..." This rule targets the performance of the NHS infrastructure of pavements and bridges. Chapter 1 of this Asset Management Plan outlines the current inventory and condition of Missouri's NHS infrastructure and how the data is collected.


The performance measures for road and bridge condition are:


- 1) Percent Poor Interstate Pavement
- 2) Percent Good Interstate Pavement
- 3) Percent Poor Non-Interstate NHS Pavement
- 4) Percent Good Non-Interstate NHS Pavement
- 5) Percent of NHS Bridges classified as in Good condition
- 6) Percent of NHS Bridges classified as in Poor Condition

#### **Pavements**


Historical performance of the NHS pavements has been monitored by the smoothness of the pavement. Chapter 1 of this Asset Management Plan explains how MoDOT captures and reports the data for smoothness. The historical information provided in the charts below is strictly based on smoothness data known as IRI. In 2017 MoDOT began to capture and report on smoothness and rutting, cracking and faulting. For all four pavement targets the goal is to maintain current conditions and the state of good repair.




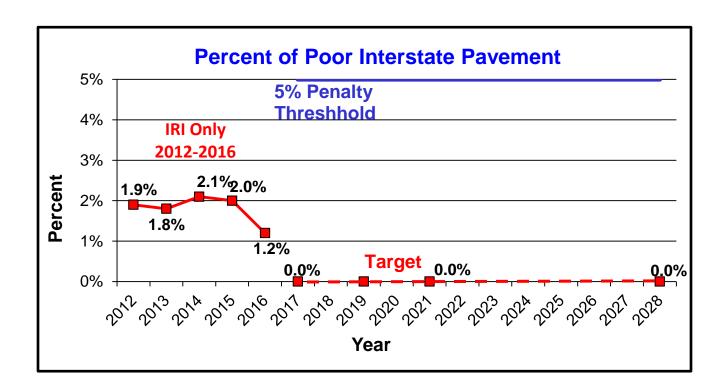

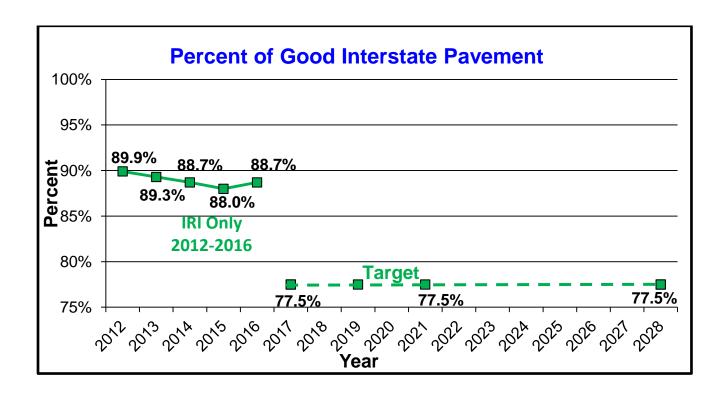



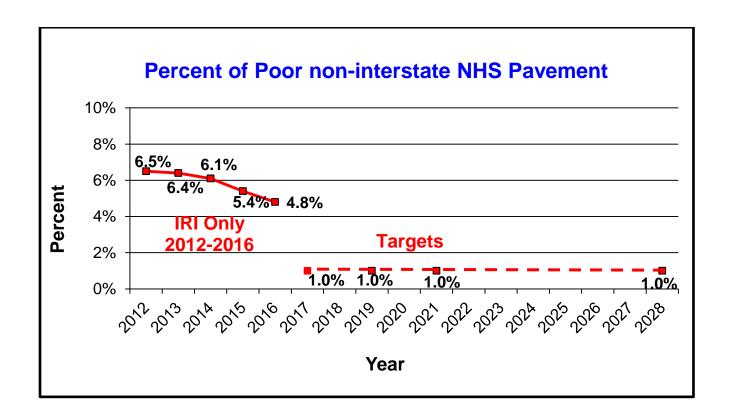

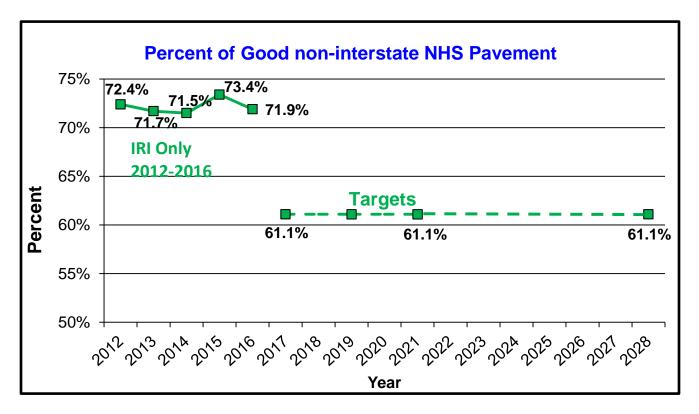





#### **Bridges**

Bridge condition is monitored through routine inspections. The inspection rating information is outlined in Chapter 1 of this asset management plan. The historical information provided in the charts below is based on past inspection data. Moving forward there will be no change in the way MoDOT captures bridge information as the national performance measures use the same process of capturing bridge data.

The future bridge targets for percent of bridges on the NHS classified as in poor condition were set at the current percent poor to maintain current conditions and the state of good repair. This target remains below the FHWA ten percent penalty threshold. The bridge targets for percent of bridges on the NHS classified as in good condition were established based on five years of historical data. The future targets are based on the declining trend in the short term and stay flat for future years to maintain the state of good repair.

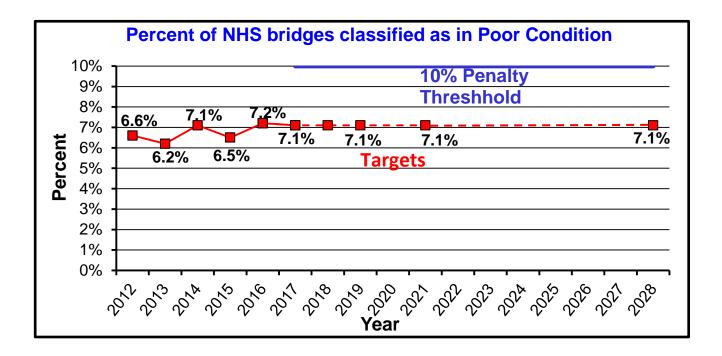



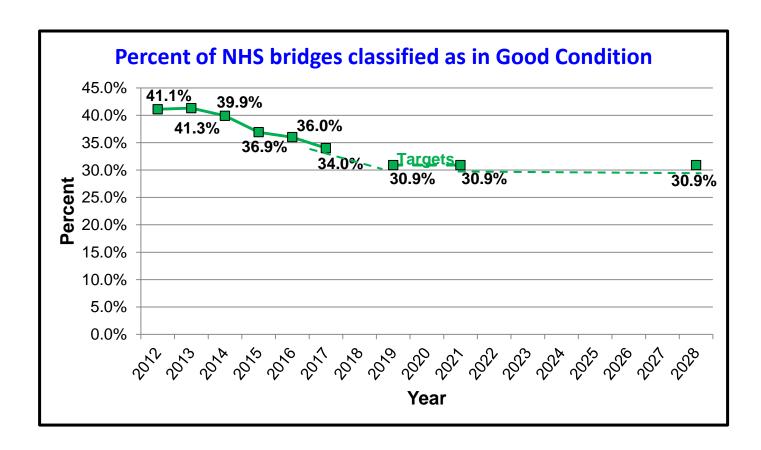

#### **Overall Performance**


The targets established for both NHS pavements and NHS bridges can be achieved with the current baseline revenue dollars shown in Chapter 4 of this asset management plan. Therefore, the targets are considered fiscally constrained without a performance gap. Asset management costs in Missouri address non-NHS pavements and bridges as depicted in Chapter 4.

In future years, additional data will become available for rutting, cracking and faulting. The performance targets will be re-evaluated over time as more trend information becomes available.



# Chapter 3: Lifecycle Planning


Ideally every mile of pavement and every bridge in the state would be in good condition. Unfortunately, funding is not available to improve and maintain Missouri's entire transportation system in good condition, so priorities must be established. Significant investments have been made to improve pavement and bridge conditions over the last decade.

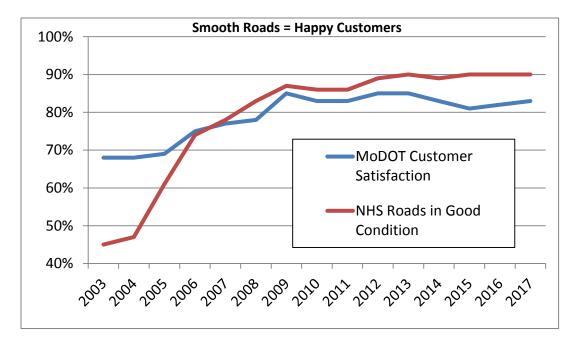

A previous significant investment known as The Smooth Roads Initiative (SRI) improved 2,200 miles of Missouri's most heavily traveled roads. This program was completed in late 2006 and was mostly comprised of very thin resurfacing treatments to improve the smoothness of the pavement. Missouri's system went from approximately 45 percent good pavements to 85 percent good pavements with this initiative and other strategic investments. The goal is to maintain these improved smooth surfaces. As you can see from the chart above, when road smoothness increases so does customer satisfaction.

The underlying goal of MoDOT's asset management plan is to maintain the current condition of pavements and bridges (e.g. maintain the current state of good repair). The most cost effective method to preserve pavements and bridges is to use preventive maintenance treatments while the assets are still in good/fair condition. The chart on the next page shows the basic strategy for MoDOT's TAMP – focused on less expensive preservation treatments more often than expensive rehabilitation and reconstruction treatments less often. The objective is to slow down the rate of deterioration and provide a smooth, durable and safe roadway for users at the lowest cost.

Lifecycle planning should not be confused with life cycle cost analysis (LCCA). LCCA is performed at the project level and compares specific treatment options against each other, for example, concrete vs. asphalt on a pavement project. Lifecycle planning is performed at the network level where the needs of all roads and structures within that particular network are considered.

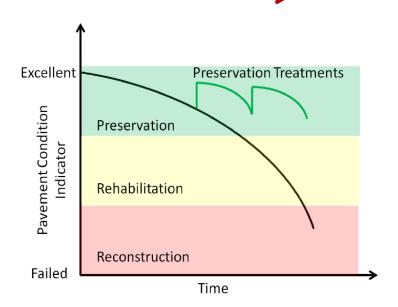

#### **Pavements**


Keeping good roads in good condition is the basic premise of MoDOT's TAMP. The pavement treatment costs for this approach are slightly different for interstates and non-interstate NHS routes. Predicting the future costs to keep roadways in good condition involves estimating the type of treatment work needed for each roadway category, when those treatments will be needed and how long those treatments will be effective. The effective life of pavement is most commonly impacted by the traffic volume, preventive maintenance activities, ground support and quality of the materials used in the payement. For example, interstate routes require a more expensive, heavy-duty pavement to withstand higher traffic volumes and truck traffic.

MoDOT's approach to pavement preservation is applying a thin, preventive maintenance treatment on a routine cycle. This is the most cost effective way to keep the roads in good condition for the traveling public and preserve the investments made over the last decade. In rare instances, pavements will need a full depth replacement, but properly designed and maintained pavements should only require a preventive maintenance treatment to extend its full life. In addition to the cyclical preventive maintenance treatments, other preventive maintenance treatments such as crack sealing and pavement repairs are performed to further extend the pavements useful life.


The following charts provide the treatment assumptions, treatment life and average cost for interstate and non-interstate NHS roadway categories and reflect the analysis of existing pavement deterioration. These charts are the average of all seven MoDOT districts and represent a statewide average potential pavement treatment and associated cost for the 10 year asset management window i.e. each year the given work type may fluctuate but the overall 10 year average is shown in the chart.

The estimated preventive maintenance cost for **interstate routes** is \$120,500 per lane mile. The average treatment cycle for this investment is eight years. These estimates are based on the following treatments: 73 percent 1¾" stone mastic asphalt (SMA), 4 percent 3¾" SMA and 23 percent a combination of unbonded asphalt wearing surface (UBAWS) and diamond grinding.



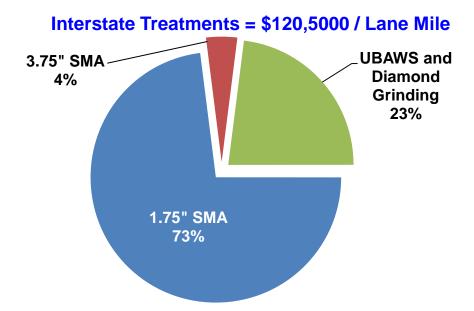


Using the Asset Management System described in Chapter 2, MoDOT can determine the life cycle for assets. For example, the treatments assumed for interstates are expected to keep the pavement in good condition for 8 years. The following chart shows how interstate treatment data is used to confirm pavements remain in good condition for an average of 8 years.

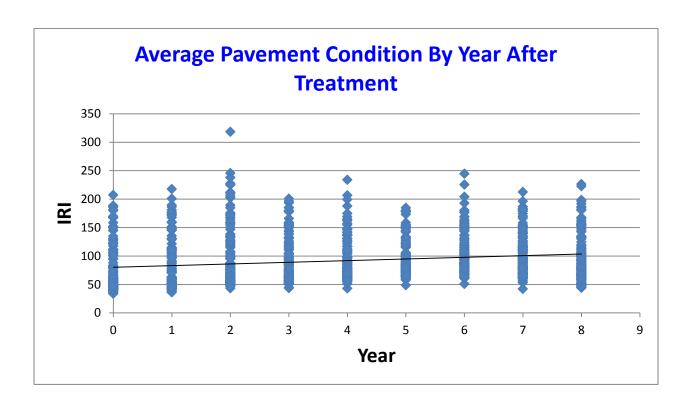



The estimated preventive maintenance cost for **non-interstate NHS routes** is \$121,500 per lane mile. The average treatment cycle for this investment is nine years. These estimates are based on the following treatments: 65 percent 1¾" superpave asphalt, 10 percent 3¾" superpave asphalt, 5 percent 2¾" superpave asphalt and 20 percent a combination of UBAWS and diamond grinding.

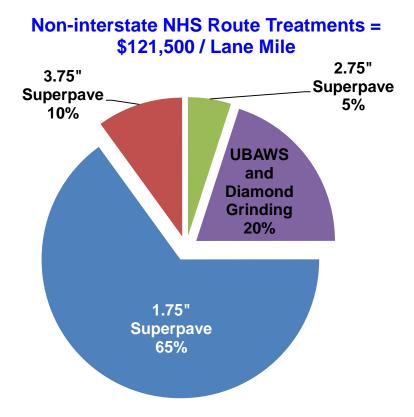

The pavement treatments identified in this chapter can be defined by the following federal work types.

Federal Work Type	MoDOT Work Type
<b>Initial Construction</b>	Limited – identified in STIP
Maintenance	UBAWS
Preservation	1.75" SMA
	1.75" Superpave
	Diamond Grinding
Rehabilitation	2.75" Superpave
	3.75" SMA
	3.75" Superpave
Reconstruction	Limited – identified in STIP



#### **Pavement Lifecycle and Performance Measures**

As described in Chapter 2, MoDOT's pavement performance goal is to sustain the state of good repair by maintaining current conditions. The lifecycle of each pavement treatment was derived by analyzing several past investments used throughout the state and at several locations. In particular the previous investments explained earlier in this chapter used an asset management approach of applying a thin lift of pavement to preserve the underlying structure. This program yielded data that supports the eight year lifecycle on Missouri's NHS routes.

### **Bridges**

Since Missouri has a large number of poor condition bridges, as outlined in Chapter 1, a preventive maintenance approach alone will not be sufficient to maintain current conditions. A combination of a preventive maintenance approach to prolong the useful life of Missouri's existing bridges and an aggressive bridge repair/replacement program is needed to maintain current bridge conditions.

#### **Bridge Preventive Maintenance**

MoDOT also performs preventive maintenance activities for bridges. These activities are crucial to providing the lowest lifecycle costs and include:


- Bridge cleaning and flushing to remove dirt and debris and to allow proper drainage and drying of the deck. The dirt and debris holds moisture and chlorides that cause deterioration. Deck flushing is done in the fall and spring with a thorough cleaning of an entire bridge done in the spring following snow season and again in the fall prior to snow season. This cleaning includes the bridge deck, piers, abutments and lower chords of truss bridges. The goal is to flush all bridges each year.
- Bridge joint and deck sealing is done to prevent dirt, debris and chlorides from deteriorating the deck and supporting bridge members. Sealing activities are performed on a cyclical basis as well as condition basis.
- Spot painting of bearings and pilings is done to protect from rusting and is performed on an as-needed basis.

#### **Typical Bridges on the NHS- Bridge Work**

For the 3,477 typical bridges on the NHS in Missouri, MoDOT will do a combination of replacements, redecks, rehabilitation and preventive maintenance treatments to maintain current conditions. After evaluating historical deterioration on existing bridges, it was determined that on average 80 bridges need work on them each year to maintain the state of good repair. The 3,477 typical bridges on the NHS equate to over 30 million square feet of bridge deck. The chart on the next page depicts the potential work type planned for bridges on the NHS for the next ten years on average i.e. each year the given work type may fluctuate but the overall 10 year average is shown in the chart.





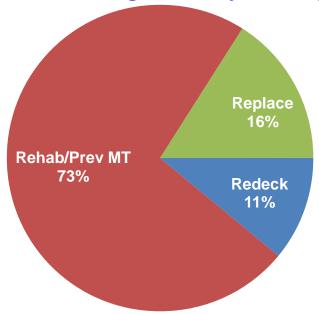

The bridge work represented above varies in price per bridge and type of work being performed. The overall costs are as follows: Replacements - \$279/sf; Redeck - \$89/sf; Rehab/Preventive Maintenance \$35/sf and represents approximately 80 bridges each year getting work performed on them. This work is needed to keep each bridge in a state of good repair on the NHS, with much more worked needed on non-NHS bridges to keep MoDOT's entire bridge network in a state of good repair.

Even though approximately 80 bridges (approximately 944,000 square feet) on the NHS each year are getting improvements to maintain the state of good repair, MoDOT still sees approximately 20 bridges each year fall into the poor category. The number of bridges in the poor category on the NHS is currently 131 and represents approximately 1.7 million square feet of bridge deck and 1,983 bridges in the fair category on the NHS that equates to approximately 18.5 million square feet of bridge deck.


Historically, MoDOT has approached bridge work by the "worst first" method. Asset management has changed the focus from a "worst first" approach to a multi-focused approach including not only full replacements of poor bridges, but also on preventive maintenance of fair condition bridges. The preventive maintenance can be rehabilitation work or traditional type preventive maintenance such as flushing. The focus on preventive maintenance allows MoDOT to keep more bridges in a fair condition much longer.

#### Major Bridges on the NHS – Bridge Work

As described in Chapter 1, a major bridge is greater than 1,000 feet in length. The map on the next page shows MoDOT's ten year major bridge needs, which represent over \$700 million worth of construction costs. The concept of preventive maintenance to maintain the state of good repair is also used on the major bridges in Missouri. Unfortunately, several of the major bridges in Missouri are also well over their useful life and are in need of a full costly replacement. MoDOT currently has 166 major bridges on the NHS (208 total Major Bridges



including non-NHS bridges) that represent over 20 million square feet of bridge deck. Of the overall square foot of bridge deck, 11 percent are categorized as poor condition and are in need of replacement, and 63 percent are in the fair condition category.

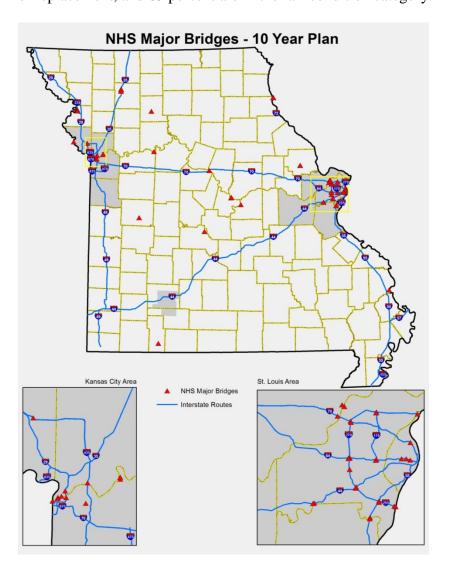

The bridge treatments identified in this chapter can be defined by the following federal work types.

Federal Work Type	MoDOT Work Type
<b>Initial Construction</b>	Replacements
Maintenance	Prev MT
Preservation	Rehab/Prev MT
Rehabilitation	Rehab
Reconstruction	Redeck





#### **Bridge Lifecycle and Performance Measures**


As described in Chapter 2, MoDOT's bridge performance goal is to sustain the state of good repair by staying flat on future bridge condition targets. Lifecycles of bridges are quite a bit different than pavements. Bridges newly replaced tend to last 50+ years while those repaired or rehabilitated will have an extended life that varies in years.

#### **Lifecycle Summary**

Overall MoDOT's investment strategies (see Chapter 4) are being developed and led by pavement and bridge lifecycles. To summarize the existing assets by age, the charts below were created for evaluating the system in addition to the condition data outlined in Chapter 1.

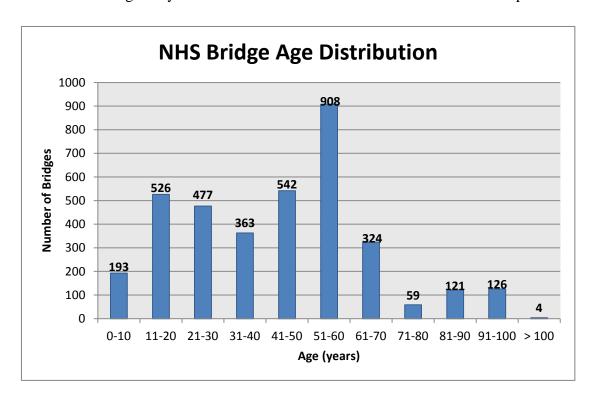

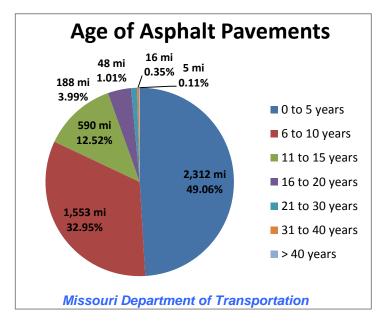

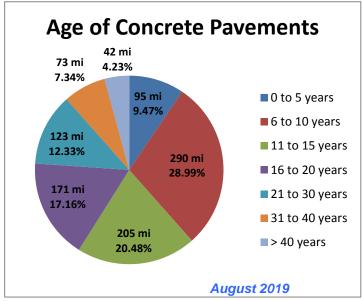




# **Chapter 4: Financial Plan and Investment Scenario**

Missouri's transportation system has a replacement value today totaling \$125 billion. A significant piece of that system is Missouri's NHS system and it is a critical asset to the state with a replacement value totaling \$53 billion. Detailed assumptions for the replacement cost calculation can be found in Appendix B.

# Missouri's NHS Replacement Cost (\$53.0 billion)

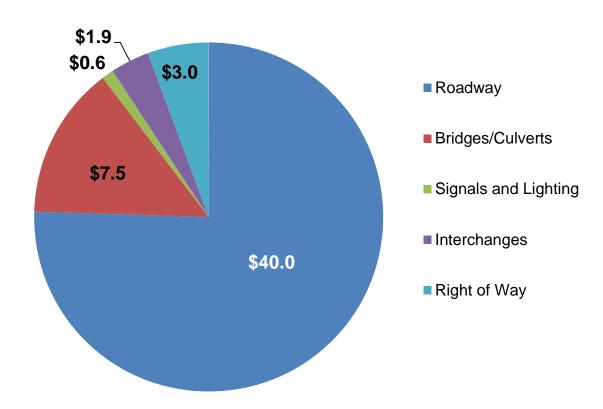


# **Funding Overview**

Missouri's state-owned NHS routes are funded from a combination of state and federal sources. The state funding available to maintain these routes includes the state fuel tax, motor vehicle and driver licensing fees, motor vehicle sales taxes and miscellaneous revenue.


The federal revenues are based on formulas prescribed by federal law through transportation funding acts. The majority of federal revenue is dedicated to pay for a share of eligible highway improvement costs. The federal share for the eligible costs is typically 80 percent, with the state providing a 20 percent match.



From fiscal years 2013 to 2017, the revenues have remained relatively stable as shown in the chart below.

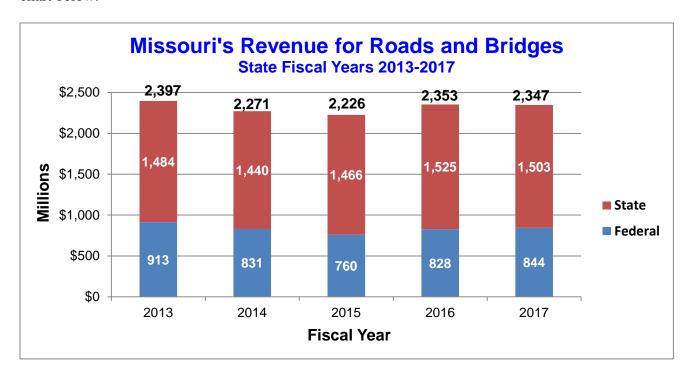


The chart below provides MoDOT's revenue forecast estimates for fiscal years 2019-2028.

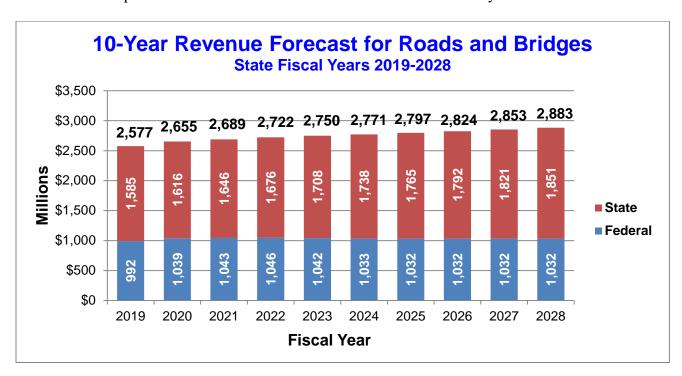


 $\rightarrow$ 

The forecasted revenues are available for road and bridge investments across the state. Missouri's road and bridge funding is allocated to local governments, other state agencies and MoDOT. The local government funding includes a share of state taxes and fees, and funding for locally-sponsored federal programs. These funds can be used to maintain locally-owned roads and bridges. MoDOT's share of Missouri's road and bridge funds are dedicated to improvements for state-owned routes. MoDOT's investment areas include the construction program and other investments for engineering, debt payments, maintenance, fleet, facilities, information systems and administration. From fiscal years 2013 to 2017, the total investments have ranged from \$2.3 billion to \$2.5 billion as shown on the chart below.

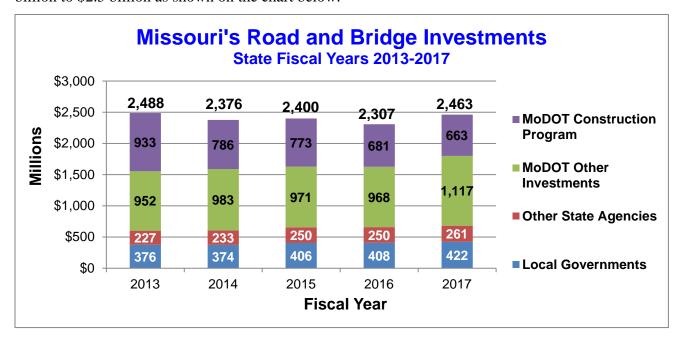


MoDOT's construction program investments are the primary funding source for maintaining NHS assets. MoDOT's 10-year financial forecast assumes construction program investments will average \$963 million annually, as shown on the following chart.

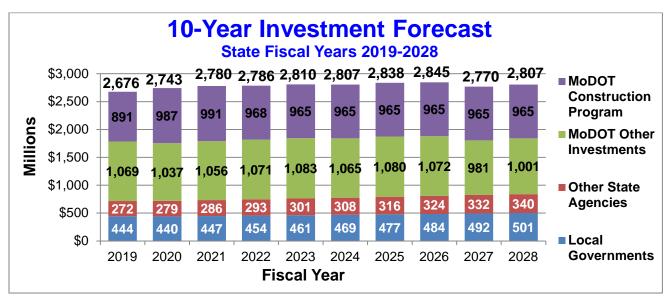



 $\rightarrow$ 

Based on the pavement and bridge work type assumptions from Chapter 3, MoDOT has estimated the cost to maintain existing conditions for all state-owned NHS routes. MoDOT's asset management plan assumes annual inflation costs of three percent, resulting in an annual cost range from \$335 million to \$552 million per year. The year-to-year fluctuations are due to the significant cost for major bridge replacements that are included as specific bridges need to be replaced. The average cost of a major bridge replacement totals \$49 million.

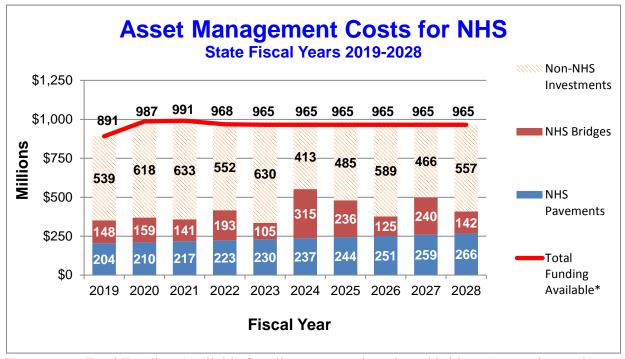

<sup>\*</sup>Represents Total Funding Available for all state-owned roads and bridges (except low volume routes), not just NHS routes.

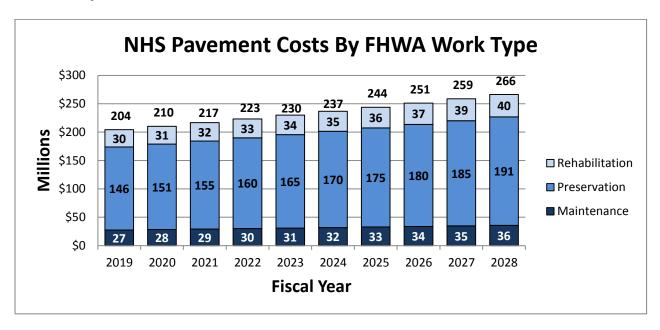

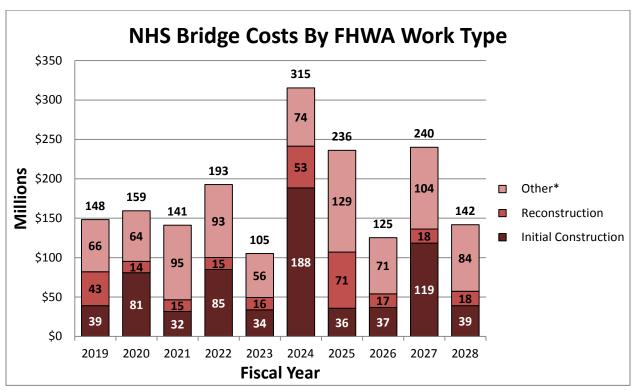

<sup>\*</sup>Other includes maintenance, preservation and rehabilitation.

The remaining funds available range from \$413 million to \$633 million per year. These funds are available for improvements to non-NHS routes throughout the state, along with non-preservation improvements on the NHS routes, such as safety, congestion reduction and economic development. Therefore, MoDOT does not have a funding gap associated with maintaining the NHS system.

# **Performance Gaps**

MoDOT focuses the majority of funding on asset management with the goal of maintaining existing conditions. Unfortunately, current available funding leaves a performance gap in system performance for reliability and congestion reduction improvements. MoDOT seeks and implements cost-effective, innovative solutions to close performance gaps, but results in these areas are expected to worsen going forward based on current funding, as shown in the following table.

System Performance Measure	2017 Baseline	2019 Target	2021 Target
Interstate Travel Time Reliability Measure: Percent of Reliable	91.6%	88.9%	87.1%
Person-Miles Traveled on the Interstate			
Non-Interstate Travel Time Reliability Measure: Percent of	92.3%		87.8%
Reliable Person-Miles Traveled on the Non-Interstate NHS			
Freight Reliability Measure: Truck Travel Time Reliability Index	1.25	1.28	1.30



In total, MoDOT's outreach and long range planning activities have identified an annual funding gap totaling \$825 million for the following areas that are beyond maintaining the system:

- \$95 million to improve state-owned bridge conditions
- \$50 million to improve road conditions
- \$25 million to stabilize the level of MoDOT's maintenance and operations efforts to keep pace with inflationary cost increases
- \$275 million to invest in projects that increase economic growth and improve safety
- \$300 million for major interstate reconstruction
- \$80 million to improve multimodal transportation options

Additional information regarding unfunded transportation needs, including future expectations of demographics, employment, freight, travel and advanced technology can be found in MoDOT's 2018 long range transportation plan at <a href="http://www.modot.org/LRTP/">http://www.modot.org/LRTP/</a>.



## **Locally-Owned NHS Routes**

Missouri's NHS system includes 265 miles of locally-owned routes, including 86 bridges with 1,093,137 square feet of bridge deck. MoDOT has processes in place to collect the pavement data each year for these routes and inspects all the bridges on these routes. This data is shared with local planning agencies and officials.

To fund asset management needs on locally-owned NHS routes, each city or county receives state and federal funding that can be used to maintain the pavements and bridges. As shown in previous charts, these amounts range from \$440 million to \$501 million per year for the 10-year TAMP planning horizon. In addition, many cities and counties have local taxes and fees dedicated for transportation purposes totaling approximately \$800 million each year.

While MoDOT does not dictate how these local funds are invested, MoDOT works collaboratively with local officials to share data, expertise and guidance to ensure these routes are properly maintained in a state of good repair. A listing of local owners is provided on page 4-6.

#### Cities

Aurora Kirkwood Cape Girardeau Liberty Carthage Monroe City Clayton Neosho Columbia New Madrid Cottleville O'Fallon Dardenne Prairie Park Hills Edina Springfield **Excelsior Springs** St. Charles **Fulton** St. Joseph Independence St. Louis **Jennings** St. Peters **Joplin** Trenton **Kansas City University City** Wentzville

#### Counties

Boone Greene Jackson St. Charles St. Louis



# **Chapter 5: Risk Management**

Enterprise Risk Management (ERM) is a process designed to identify potential events that may affect the entity, manage risk to be within an acceptable level, and to provide reasonable assurance regarding the achievement of entity objectives. The existence of an ERM process within an organization is recognized as an example of good governance and is important to strategic management of organizational risk. MoDOT incorporated the ERM process into the organization in 2012. MoDOT's senior leadership team collaborates yearly to examine and rate the organization's risk areas.

MoDOT has identified the following top ten areas as potential areas of risk:

- 1. Workforce
- 2. Financial
- 3. Political
- 4. Public Opinion and/or Support
- 5. Transportation System Failures
- 6. Natural Disasters
- 7. Safety and Security
- 8. Information Technology
- 9. Legal and Regulatory Changes
- 10. Fraud and/or Theft

Out of the top ten areas being monitored for risk, three areas specifically are related to MoDOT's TAMP which are: Financial, Transportation System Failures and Natural Disasters. Each year MoDOT evaluates the risk areas for impact, likelihood and readiness. Below is a table that outlines the January 2018 findings for the three risk areas associated with MoDOT's TAMP. The yellow highlighted numbers represents the average score from MoDOT's senior leadership team. See Appendix C for specific risks under each of these categories.

Risk Category	Impact			Likelihood		Readiness						
	~ 4		<b>.</b> .			~		~		s in Place	<b>T</b> T	
	Little	Impact	Devasta	ating	Little	Chance	Fairly	/ Certain	and	Tested	Unpre	parea
Financial	1	2	3 (3.3)	4	1	2	3 (3.0	<mark>))</mark> 4	1	2 (2.2)	3	4
Transportation System Failures	1	2	3 (3.0)	4	1	2 (2	<mark>0)</mark> 3	4	1 (	<b>(1.9)</b> 2	3	4
Natural Disasters	1	2	3 (3.2)	4	1	2 (2.	<mark>.3)</mark> 3	4	1 (	<b>1.6)</b> 2	3	4

#### **Financial Risk**

Financial risk includes items such as uncertainty of federal funds, viability of fuel tax as a revenue source, an unstable economy, the inability to match federal funds, inflation in commodities and/or contract prices and rising benefit costs. The financial risk is rated to have a high impact with a medium likelihood and a readiness rating nearing plans in place and tested. To aid in mitigating this risk MoDOT has put several processes in place to monitor the financial risk. Those processes include preparing an annual financial forecast, not fully programming the fourth and fifth year of the STIP, annual project estimate updates and bid letting review each month. In addition, maintaining the asset management plan was identified to ensure the existing system is maintained before new infrastructure is added.



## **Transportation System Failures**

Transportation system failure risk includes items such as a bridge collapse, condition and capacity issues with interstates and traffic congestion in the metropolitan areas. The transportation system failure risk impact is rated to have a fairly high impact with a lower likelihood and a readiness rating nearing plans in place and tested. To aid in mitigating this risk MoDOT has several processes in place to monitor the transportation system failure risk such as, inspecting bridges on a routine cycle, emergency contracting authority, dedicated interstate and major bridge funding, and use of an asset management plan.

#### **Natural Disasters**

Natural disaster risk includes items such as earthquakes, blizzards, flooding, tornadoes, nuclear power plant events and pandemics. The natural disaster risk impact is rated to have a fairly high impact with a lower likelihood and a readiness rating nearing plans in place and tested. To aid in mitigating this risk MoDOT has put several processes in place to reduce the natural disaster risk, such as activating MoDOT's Emergency Operations Center during weather events, creating and updating an Incident Response Plan and use of the National Incident Management System (NIMS).

Within this risk category is extreme weather vulnerablities that could potentially affect assets. MoDOT has identified assets vulnerable to extreme flooding with some recent flooding events occuring throughout the state. The assets vulnerable to flooding include several NHS bridges and pavements (some located on interstates) all of which have been identified. To mitigate this risk, strategic assets were added to MoDOT's STIP for improvement to reduce risk. In the future, further evaluations of assets prone to natural disasters will be analyzed and considerations will be given to address the recurrent issues through projects programmed in MoDOT's STIP. MoDOT maintains records of all locations affected by natural disasters, and further documents if any repairs were made, and if those repairs were emergency repairs or permanent repairs. Under 23 CFR Part 667 requirements, MoDOT has identified two sites that have had damage and required permanent repairs repeatedly. Those sites and the correponding repairs are listed below.

- Platte County, Route 92 in Tracy near the Platte River. Event MO-07-01, Maintenance repaired the aggregate shoulders that had been washed out due to water overtopping the roadway. Event MO-11-02, Contract repair of eroded bank and installation of guardrail (4P3003, 4P1914)
- Maries County, US 63 at Gasconade River, Bridge A3760 Event MO-08-02, Maintenance repaired and reshaped the fill slopes after shoulders and fill slopes were eroded due to water overtopping the roadway. Event MO-17-01, Contract scour repair at pier 7. (5P3298)

Although MoDOT has identified only two locations with repeated damaged that required permanent repairs, several other locations have experienced repeated damage but have only required emergency repairs. These emergency repairs are documented and kept on file along with the permanent repair locations.



# **Chapter 6: TAMP Process and Implementation**

Developing, monitoring and improving the TAMP is an evolving and iterative process. MoDOT continues to evaluate the successes of the TAMP through the various methods described below.

## **History of Asset Management**

In 2006, MoDOT completed improvements to 2,200 miles of Missouri's most heavily traveled roads with a program called the Smooth Roads Initiative (SRI). This program was the start of the current asset management approach in Missouri. The SRI program was mostly comprised of very thin resurfacing treatments to improve the smoothness of the pavement on the NHS system. This is the very same concept that MoDOT's TAMP is built upon, which is focused on less expensive preservation treatments on a routine cycle instead of expensive rehabilitation and reconstruction treatments.

Missouri taxpayers have responded favorably to this approach as MoDOT's customer satisfaction scores have increased from 68 percent in 2004 to over 80 percent every year since this approach was implemented.

In early 2016, MoDOT began moving toward full asset management for pavements and bridges. To begin this effort, MoDOT engaged planning partners throughout the state in the discussions to set the framework for asset management. The preservation concept is applied so pavements and bridges can remain in a state of good repair. By late 2016, MoDOT developed statewide lifecycles, cost assumptions, projected funding and treatment types for all pavements and bridges.

In 2017, these efforts were further developed by customizing the statewide asset management assumptions into MoDOT district specific inputs. Each of the seven MoDOT districts have teams that evaluate treatment types, treatment life cycles, costs and the average annual number of treatments needed to maintain a state of good repair.

District plans also include 10-year funding projections based on the Missouri Highways and Transportation Commission's funding distribution policy. Districts receive STIP funds based on formulas that use the amount of highway travel, bridge size, highway miles, population and employment. Districts use asset management models to run various treatment type scenarios to determine the optimal treatment



options that could be accomplished with the limited funding available.



An example of a district asset management's summary model is shown below. Each district uses this Excel-based model to develop assumptions and various investment scenarios to ensure current pavement and bridge conditions can be maintained with existing funding. The model provides a tool to manage the condition of pavement and bridge assets by allowing quick what-if analysis to determine the benefit-cost over the life cycle of assets for alternative actions, and identifies short- and long-term budget needs for managing the condition of pavement and bridge assets. Each MoDOT district uses the model to recommend optimal programs and implementation schedules to manage the condition of pavement and bridge assets within policy and budget constraints. The model includes the following sections:

- Pavement assumptions: This section includes the inventory of lane miles, current
  condition, planned condition for investment scenarios, treatment cost per mile, average
  treatment life, number of miles treated per year and estimated annual spending. Each of
  these items are identified for interstates, other major routes (non-interstate NHS), and all
  other state routes.
- Non-Major Bridge Assumptions: This section includes the bridge inventory for interstates, other major routes (non-interstate NHS) and all other state routes. The cost per square foot is included for the bridge repair options (replacement, redeck, rehabilitation and preventive maintenance) to arrive at an average cost per square foot.
- Major Bridge Assumptions: Listing of major bridges, which are greater than 1,000 feet, to be repaired over the 10-year time frame. This list is maintained by MoDOT's bridge division in a separate database.
- Estimated Funding Summary: A key component of MoDOT's asset management planning is ensuring each district's plan is fiscally constrained. This section identifies the expected funding available and uses the pavement and bridge assumptions information to develop 10-year cost estimates.
- Results: High-level summary of the expected pavement and bridge conditions at the end of the 10-year planning horizon.

A snapshot of the model for the St. Louis district is shown on the following page.



St. Louis District (\$ Millions) - Amounts Do Not Include Engineering Annual Cost Inflation: 3.0% Pavement Assumptions: Major Bridge Assumptions: Cost Per Treated Per Life (Years) 44 bridge over Meramec River in Fenton (A2643,L0623) Other Major Routes 90% \$81,300 203 \$16.5 -64 bridge over railroads/ramps in St. Louis City (A1523) -270 bridge over Mississippi River at Chain of Rocks (A0890) 2021 \$13.9 2021 Low Volume Routes (<400 ADT) 138 -70 bridge over Missouri River at Blanchette (A3292) 2021 \$23.2 Non-Major Bridge Assumptions<sup>2</sup> \$11.9 -255 bridge over Mississippi River in St. Louis (A1850,A4936) 2022 11% 3 Replacements - Critical Condition (\$194 sq ft) te 799 bridge over Mississippi River (MLK) in St. Louis City (A4856) \$36.9 37% 11 Rehabs - Fair Condition (\$30 sq ft) I-64 bridge over Vandeventer in St. Louis City (L0667) 2025 \$26.1 100% 14,945 16,600 12,537 6,074 Estimated Funding Summary 2018 2022 2027 Transp. Alternatives Funds Operations and Other Funds \$2.5 \$2.5 \$0.0 \$207.3 Potential Funding Available \$223.4 \$207.3 \$207.3 \$229.2 \$229.2 of Critical/Fair Condition Bridge Repairs/Year \$44.5 \$47.3 \$48.7 12 8 9 Pavement Costs Non-Major Bridge Costs Major Bridge Costs ADA Transition Plan Guardrail Updates Other TCOS Costs Total Costs \$19.7 \$0.0 \$3.2 \$2.7 \$24.2 \$0.0 \$3.9 \$3.3 \$24.9 \$0.0 \$4.1 \$3.4 \$20.2 \$69.8 \$182.0 linor Routes (>400ADT) \$979.6 (\$49.1) \$262.5

There are additional assumption tabs for pavements and bridges as shown below. The pavement assumptions include treatment types, lane miles costs for each treatment, percentage of each treatment and years of treatment life to determine the averages used on the summary tab.

# Asset Management Plan - Pavement Treatment Assumptions Costs Per Lane Mile

Mobilization % of Weighted Cost Per Wgt Cost Weighted Treatment Lane Shoulder Mill Stripes Rumbles (4.5%) Total Cost Treatments Cost Years Year Per Year Years 114,793 1.75 sma has 1/2 scratch on 50% 6,400 1,200 1,000 40,17 14,349 111.700 55,850 6.400 1.200 1.000 7,927 184.077 10.0% 18.40 9.0 20,453 2.045 0.9 1.75 sma has 1/2 scratch on 50% 79,525 3,479 67,500 6,400 1,200 1,000 3,425 35.0% 27,83 9,941 8.0 2.8 111,700 6,400 1,200 1,000 5,414 125,714 10.0% 12,57 9.0 13,968 1,397 0.9 Diamond and ubaws\* 30,000 14,100 1,200 1,000 2,084 48,384 10.0% 7.0 6,912 100.0% 13,125 1,000 84,384 30.0% 1,200 3.75 93,000 46,500 6,400 1,200 1,000 6,665 154,765 10.0% 15,476 10.0 15,476 1,548 68,500 34.250 6,400 1,200 1.000 5.011 116,361 5.0% 5.818 8.0 14,545 727 0.4 48,100 1,200 1,000 2,552 59,252 40.0% 23,70 7,406 2,963 3.75 93.000 6.400 1,200 1,000 4,572 106,172 5.0% 10.0 10.617 531 0.5 68,500 6,400 1,200 1,000 5.0% Other 3,470 80,570 4,028 8.0 10,071 504 0.4 30,000 5.0% 2,440 25.0% 2,973 Cold mix 17 500 1 400 1 200 n 905 21 005 5.0% 1.050 10.0 2 100 105 0 5 30,500 2,440 42,364 10.0% 3,530 353 1.2 6,400 1,200 1,824 4,236 1 clc 6,400 1.75 sp 37,200 1,200 1,000 2,898 67,298 10.0% 6,730 10.0 6,730 673 ubaws 30,000 1.200 1.000 1.449 33.649 5.0% 1.682 7.0 4.807 240 0.4 106,172 5.0% 7,078 3,397



The bridge assumptions tab includes the type of bridge work, number of bridges to be repaired each year and cost assumptions to determine an average cost per square foot.

### Asset Management Plan - Typical (<1,000 ft) Bridge Assumptions

#### Cost Per Square Foot Assumptions:

	% of Type	Number	Increase	Bridge	Roadway	
Type of Bridge Work	of Work	Per Year	Existing Br.	Cost Per	Items	Total Unit Price
Replacements	22%	55	10%	\$110	1.6	\$194
Redecks	10%	25	5%	\$55	1.4	\$81
Rehab	28%	70	0%	\$25	1.2	\$30
Preventive Maintenance	40%	100	0%	\$12	1.2	\$14
	100%	250				


MoDOT districts use asset management models to guide project selection decisions for the STIP. These project programming decision are done in collaboration with planning partners, that include members responsible for the locally-owned NHS.

While MoDOT has sufficient funds to maintain a state of good repair on the NHS system (see Chapter 4), the district asset management plans identified a performance gap (funding shortfall) for non-NHS assets. After realizing this funding gap, the Missouri Highways and Transportation Commission (MHTC) established an Asset Management Deficit Program in 2017 to ensure adequate funding for a state of good repair for non-NHS assets. The MHTC took action again in February 2019 to align MoDOT's funding distribution with its asset management plan. These actions included, funding these categories at a level necessary to maintain the system condition and renaming the funding categories as Asset Management and System Improvement. These changes increase transparency with customers regarding the amount of funding required to maintain such a large system.



## **Implementing Asset Management**


MoDOT established a TAMP Steering Committee in 2015 made up of MoDOT senior leadership positions and the Federal Highway Administration. The purpose of this committee is to set the direction of the TAMP, monitor the success of the TAMP and to make improvements to the process.

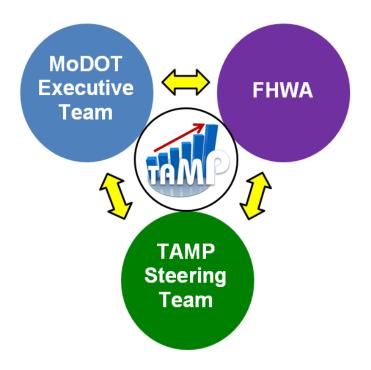


Each year districts work with regional partners to update the STIP using asset management plans as a guide to program projects. At the end of each programming cycle, MoDOT evaluates the STIP to ensure the projects programmed meet the objectives of the TAMP. MoDOT's 10-year rolling TAMP is reviewed and refined each year with the latest information.


MoDOT also monitors results and adjusts strategies through a performance management system called Tracker. The Tracker has performance measures that monitor the condition of MoDOT's pavements and bridges. See below for Tracker information relating the STIP and the asset management plans.




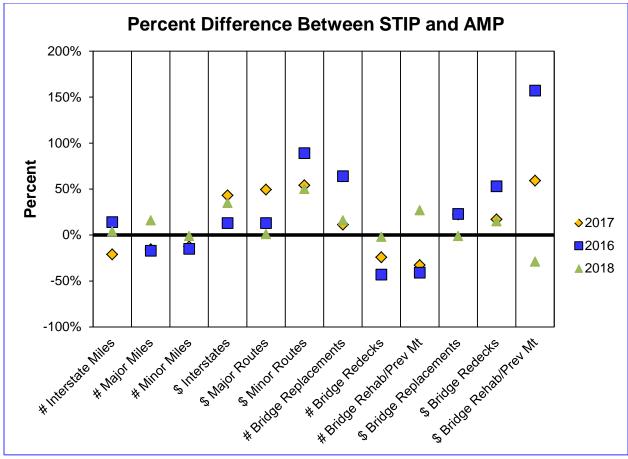

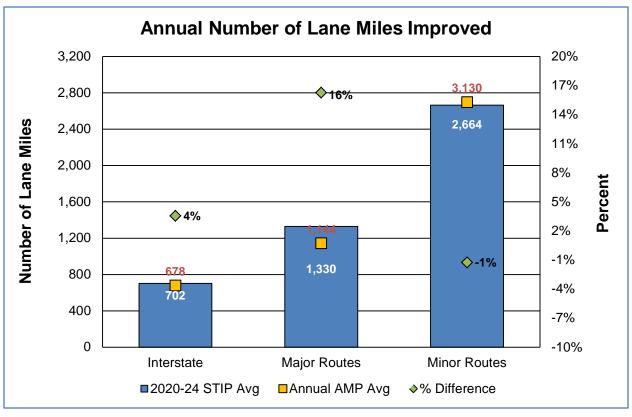




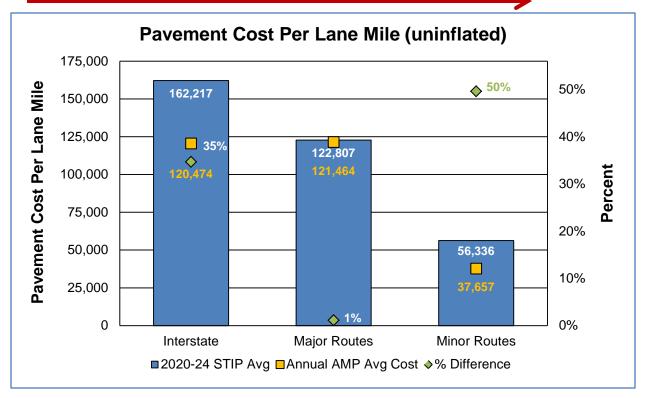

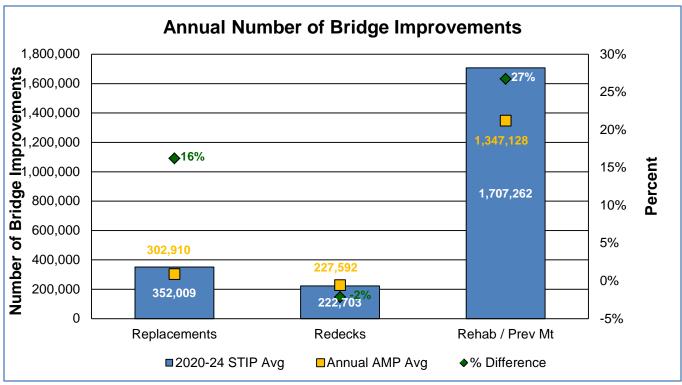



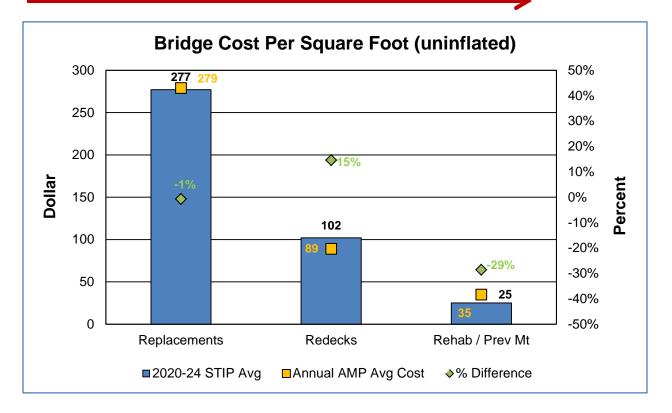

In addition to MoDOT's performance measures, there are federal performance measures (see Chapter 2) that monitor the condition of Missouri's pavement and bridge conditions. These are national measures established and reported on each year. MoDOT has been coordinating a monthly webinar since 2015 with planning partners to discuss national performance requirements, including asset management.

It's imperative that the asset management plans get implemented in order to keep the system operating in the condition that it presents today. To ensure the asset management plans are implemented, each year MoDOT compares the asset management plan investment assumptions to the actual investment levels proposed to be programmed in the 5-year STIP prior to finalizing the draft STIP. Any significant deviations are reviewed and addressed if deemed appropriate. In the tables on the following page, the investment levels and amount of work in MoDOT's asset management plans is compared to the most recent 5-year STIP and reflects what is shown in the Tracker measures that monitors the implementation success. From the Tracker Measure, you can see that percent difference between the asset management assumptions and the actual investment levels in the STIP have dialed in considerably over the past two years. The charts below compare the treatment type assumptions from the asset management plan to the actual treatment types programmed in the STIP.

For pavements on Interstates and Other Major Routes, preservation is any treatment that is 1.75" or less including UBAWS and diamond grinding, rehabilitiation treatments are those 1.75" and greater and maintenance is chip seal only. For pavements on Minors Route that have an average daily traffic greater than 400, preservation is a treatment that is 1" or less, rehabilitation treatments are those 1" and greater and maintenance is chip seal only.



	STIP	AMP	STIP 3	AMP	STIP	AMP
	3yr	Miles	year avg	cost/lane	Investment	Investment
Pavements	Avg #	per	cost/lane	mile	(millions)	(millions)
	of lane	year	mile			
	miles					
Interstate	702	678	\$162,217	\$120,500	\$113	\$83
Other Majors	1330	1144	\$122,807	\$121,500	\$157	\$131
Minors >400 ADT	<u>2664</u>	<u> 2698</u>	\$56,336	\$37,700	<u>\$134</u>	<u>\$99</u>
Totals	4696	4520			\$404	\$313

	STIP 3yr	AMP sq ft	STIP 3	AMP	STIP	AMP
Bridges	Avg # of sq. ft.	per year	year avg cost/sq ft	cost/sq ft	Investment (millions)	Investment (millions)
Replacement	352,009	302,910	\$277	\$279	\$54	\$85
Rehabilitation (incl. redeck, rehab & preventive MT)	<u>1,929,965</u>	<u>1,574,720</u>	\$102* \$25**	\$89* \$35**	<u>\$132</u>	<u>\$67</u>
Totals	2,281,974	1,877,630			\$186	\$152

<sup>\*</sup>Redeck only \*\*Rehab/PM only

## **Moving Forward**

For the next update of asset management plans, MoDOT is focused on the following improvement areas:

- Evaluating bridge targets: Historically, asset management plans determined the number of bridge repairs needed each year. MoDOT will begin re-examining deterioration trends to identify the square footage of bridges to improve each year. Establishing annual square footage targets for replacements, redecks and rehabilitations will better align with performance measures and cost information.
- Updating bridge and pavement costs: Asset management plans are used to guide STIP investment decisions. For the previous two STIP update cycles, the STIP pavement costs per mile and bridge costs per square foot were significantly higher than asset management plan assumptions. Even though the most current STIP dialed in on these costs considerably, these costs will be analyzed each year to ensure the STIP and asset management plans are better aligned.
- Bridge-sized culverts: Previous asset management plans did not include bridge-sized culvert replacements. The majority of culverts are not in poor condition and many poor condition culverts can be improved by fixing scour, which can be accomplished by MoDOT's maintenance forces. These assets will be analyzed to ensure adequate repairs, if needed, are included in asset management plans.

				Requirement
			How this Requirement is Addressed	Addressed on
#	Section	Requirement	in this Document	these Pages
1	515.9 (a)	A State DOT shall develop and implement an asset	This document outlines how MoDOT	Entire Document
		management plan to improve or preserve the condition of	will manage its NHS pavements and	
		the assets and improve the performance of the NHS in	bridges over the asset management	
		accordance with the requirements of this part.	period of 10 years. MoDOT intends	
			for asset conditions to hold steady.	
2	515.9 (a)	Asset management plans must describe how the State	This document outlines how MoDOT	Entire Document
		DOT will carry out asset management as defined in §	plans to implement asset	
		515.5.	management practices for	
			pavements and bridges over the next	
			10 years.	
3	515.9 (b)	An asset management plan shall include, at a minimum, a	This documents outlines all NHS	Chapter 1 –
		summary listing of NHS pavement and bridge assets,	bridges and pavements by ownership	Asset Inventory
		regardless of ownership.	either state owned or locally owned	and Condition
4	515.9 (c)	In addition to the assets specified in paragraph (b) of this	This document addresses all NHS	Entire Document
		section, State DOT's are encouraged, but not required, to	bridges and pavements by ownership	
		include all other NHS infrastructure assets within the	either state owned or locally owned.	
		right-of-way corridor and assets on other public roads.	This document does not address	
		Examples of other NHS infrastructure assets include	non-NHS infrastructure.	
		tunnels, ancillary structures, and signs. Examples of other		
		public roads include non-NHS assets in its asset		
		management plan, or to include assets on other public		
		roads, the State DOT, at a minimum, shall evaluate and		
		manage those assets consistent with paragraph (1) of this		
		section.		
5	515.9 (d)	The minimum content for an asset management plan	See below	See below
		under this part includes a discussion of each element in		
		this paragraph (d).		

6	515.9 (d)	(1) Asset management objectives. The objectives should align with the State DOT's mission. The objectives must be consistent with the purpose of asset management, which is to achieve and sustain the desired state of good repair over the life cycle of the assets at a minimum practicable cost.	Introduction
7	515.9 (d)	(2) Asset management measures and State DOT targets for asset condition, including those established pursuant to 23 U.S.C. 150, for NHS pavements and bridges. The plan must include measures and associated targets the State DOT can use in assessing the condition of the assets and performance of the highway system as it relates to those assets. The measures and targets must be consistent with the State DOT's asset management objectives. The State DOT must include the measures established under 23 U.S.C. 150(c) (3) (A) (ii) (I)–(III), once promulgated in 23 CFR part 490, for the condition of NHS pavements and bridges. The State DOT also must include the targets the State DOT has established for the measures required by 23 U.S.C. 150(c) (3) (A) (ii) (I)–(III), once promulgated, and report on such targets in accordance with 23 CFR part 490. The State DOT may include measures and targets for NHS pavements and bridges that the State DOT established through pre-existing management efforts or develops through new efforts if the State DOT wishes to use such additional measures and targets to supplement information derived from the pavement and bridge measures and targets required under 23 U.S.C. 150.	Chapter 1 – Asset Inventory and Condition and Chapter 2 – Performance Measures and Targets
8	515.9 (d)	(3) A summary description of the condition of NHS pavements and bridges, regardless of ownership. The	Chapter 1 – Asset Inventory

			_
		summary must include a description of the condition of	and Condition
		those assets based on the performance measures	and Chapter 2 –
		established under 23 U.S.C. 150(c) (3) (A) (ii) for condition,	Performance
		once promulgated. The description of condition should be	Measures and
		informed by evaluations required under part 667 of this	Targets
		title of facilities repeated damaged by emergency events.	
9	515.9 (d)	(4) Performance gap identification.	Chapter 4 –
	, ,		Financial Plan
			and Investment
			Scenario
10	515.9 (d)	(5) Life-cycle planning.	Chapter 3 – Life
	(- )	(-,,,,,,,,	Cycle Planning
11	515.9 (d)	(6) Risk management analysis, including the results for	Chapter 5 – Risk
	(,	NHS pavements and bridges, of the periodic evaluations	Management
		under part 667 of this title of facilities repeated damaged	
		by emergency event.	
12	515.9 (d)	(7) Financial plan.	Chapter 4 –
			Financial Plan
			and Investment
			Scenario
13	515.9 (d)	(8) Investment planning.	Chapter 6 –
			TAMP Process
14	515.9 (e)	An asset management plan shall cover, at a minimum, a	Entire Document
		10-year period.	
15	515.9 (f)	An asset management plan shall discuss how the plan's	Chapter 6 –
		investment strategies collectively would make or support	TAMP Process
		progress toward:	and Introduction
		(1) Achieving and sustaining a desired state of good repair	
		over the life cycle of assets,	
		(2) Improving or preserving the condition of the assets	

		and the performance of the NHS relating to physical assets, (3) Achieving the State DOT targets for asset condition and performance of the NHS in accordance with 23 U.S.C. 150(d), and (4) Achieving the national goals identified in 23 U.S.C 150(b).		
16	515.9 (g)	A State DOT must include in its plan a description of how the analyses required by State processes developed in accordance with § 515.7 (such as analyses pertaining to life cycle planning, risk management, and performance gaps) support the State DOT's asset management plan investment strategies.		Entire Document
17	515.9 (h)	A State DOT shall integrate its asset management plan into its transportation planning processes that lead to the STIP, to support its efforts to achieve the goals in paragraphs (f) (1) through (4) of this section.		Chapter 6 – TAMP Process
18	515.9 (i)	A State DOT is required to make its asset management plan available to the public, and is encouraged to do so in a format that is easily accessible.		Entire Document
19	515.9 (j)	Inclusion of performance measures and State DOT targets for NHS pavements and bridges established pursuant to 23 U.S.C. 150 in the asset management plan does not relieve the State DOT of any performance management requirements, including 23 U.S.C. 150(e) reporting, established in other parts of this title.		Chapter 2 – Performance Measures and Targets
20	515.9 (k)	The head of the State DOT shall approve the asset management plan.		See by MoDOT Director after cover page
21	515.9 (I)	If the State DOT elects to include other NHS infrastructure	Not applicable	Not applicable

		assets or other public roads assets in its asset	
		management plan, the State at a minimum shall address	
		the following, using a level of effort consistent with the	
		State DOT's needs and resources:	
		(1) Summary listing of assets, including a description of	
		asset condition;	
		(2) Asset management measures and State DOT targets	
		for asset condition;	
		(3) Performance gap analysis;	
		(4) Life-cycle planning;	
		(5) Risk analysis, including summaries of evaluations	
		carried out under part 667 of this titles for the assets, if	
		available, and consideration of those evaluations;	
		(6) Financial plan; and	
		(7) Investment strategies.	
22	515.9 (m)	The asset management plan of a State may include	N/A
		consideration of critical infrastructure from among those	
		facilities in the State that are eligible under 23 U.S.C.	
		119(c).	
515.	11 Deadline	es and phase-in of asset management plan development	
23	515.11	(1) Not later than April 30, 2018, the State DOT shall	<b>Entire Document</b>
	(a)	submit to FHWA a State-approved initial asset	
		management plan meeting the requirements in paragraph	
		(b) of this section. The FHWA will review the processes	
		described in the initial plan and make a process	
		certification decision as provided in § 515.13(a).	
		(2) Not later than June 30, 2019, the State DOT shall	
		submit a State approved asset management plan meeting	
		all the requirements of 23 U.S.C 119 and this part,	
		including paragraph (c) of this section, together with	

			· · · · · · · · · · · · · · · · · · ·
		documentation demonstrating implementation of the	
		asset management plan. The FHWA will determine	
		whether the State DOT's plan and implementation meet	
		the requirements of 23 U.S.C. 119 and this part as	
		provided in § 515.13(b).	
24	515.11	The initial plan shall describe the State DOT's processes	Entire Document
	(b)	for developing its risk-based asset management plan,	
		including the policies, procedures, documentation, and	
		implementation approach that satisfy the requirements of	
		this part.	
25	515.11	The plan also must contain measures and targets for	Chapter 2 –
	(b)	assets covered by the plan. The investment strategies	Performance
		required by § 515.7(e) and § 515.9(d) (8) must support	Measures and
		progress toward the achievement of the national goals	Targets
		identified in 23 U.S.C. 150(b). This initial plan must include	
		and address the State DOT's 23 U.S.C. 150(d) targets for	
		NHS pavements and bridges only if the first target-setting	
		deadline established in 23 CFR part 490 for NHS	
		pavements and bridges is a date more than 6 months	
		before the initial plan submission deadline in paragraph	
		(a)(1).	
26	515.11	The initial asset management plan may exclude one or	N/A
	(b)	more of the necessary analyses with respect to the	
		following required asset management processes:	
		(1) Life-cycle planning required under § 515.7(a) (2);	
		(2) The risk management analysis required under §	
		515.7(a) (3); and	
		(3) Financial plan under § 515.7(a) (4).	
27	515.11	The State-approved asset management plan submitted	N/A
	(c)	not later than June 30, 2019, shall include all required	


		analyses, performed using FHWA-certified processes, and	
		the section 150 measures and State DOT targets for the	
		NHS pavements and bridges. The plan must meet all	
		requirements in § 515.7 and 515.9. This includes	
		investment strategies that are developed based on the	
		analyses from all processes required under §515.7, and	
		meet the requirements in 23 U.S.C. 119(e) (2).	
28	515.17	Pursuant to 23 U.S.C. 150(c) (3) (A) (i), this section	Entire Document
		establishes the minimum standards States must use in	
		developing and operating bridge and pavement	
		management systems that are not subject to FHWA	
		certification under § 515.13. Bridge and pavement	
		management systems shall include, at a minimum,	
		documented procedures for:	
		(a) Collecting, processing, storing, and updating inventory	
		and condition data for all NHS pavement and bridge	
		assets.	
		(b) Forecasting deterioration for all NHS pavement and	
		bridge assets;	
		(c) Determining the benefit-cost over the life cycle of	
		assets to evaluate alternative actions (including no action	
		decisions), for managing the condition of NHS pavement	
		and bridge assets;	
		(d) Identifying short- and long-term budget needs for	
		managing the condition of all NHS pavement and bridge	
		assets;	
		(e) Determining the strategies for identifying potential	
		NHS pavement and bridge projects that maximize overall	
		program benefits within the financial constraints.; and	
		(f) Recommending programs and implementation	

	schedules to manage the condition of NHS pavement and	
	bridge assets within policy and budget constraints.	

# **Replacement Cost of the National Highway System**

To estimate the replacement cost of MoDOT's transportation system, an inventory of MoDOT's largest assets was analyzed. This inventory consisted of roadway, bridges, signals and lighting, interchanges, and right of way. The inventory was then broken down further to take into account various items that could impact cost. For example, an interchange in an urbanized area would have a different cost than one in a rural area. Costs were gathered from the design division based on previous awards. Cost was obtained by the type of facility (i.e. 2 lane, 4 lane, add lanes, etc.) The costs that were provided by design reflect what it would take to build the facility new. By combining the inventory data with the established cost data, the replacement cost for each of the assets was determined. The sum of the assets together resulted in a total replacement cost of \$124.8 billion dollars.

System	Replacement Cost (billions)
Roadway	\$40.0
Missouri has almost 21,000 lane miles of	
pavement in its inventory.	
Bridges/Culverts	\$7.5
Missouri has over 55 million square feet of bridges	
on the National highway system.	
Signals and Lighting	\$.6
Missouri has over 21,000 lights and signals on the	
National Highway System.	
Interchanges	\$1.9
Missouri has more than 900 interchanges on the	
National Highway System. Approximately 400 of	
these are interchanges other than the standard	
diamond.	
Right of Way	\$3.0
Missouri has approximately 60,000 acres of right	
of way along the National Highway System	
Total Replacement Cost	\$53.0

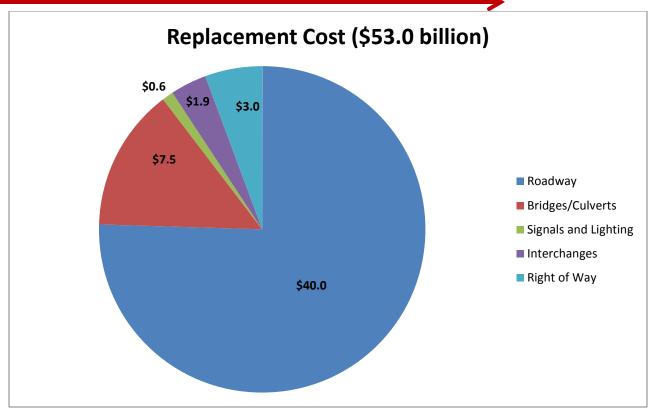

# **Detailed Cost Assumptions:**

Roadway	Cost per lane mile (millions)
Urbanized Interstate	\$2.6
Urbanized Freeway	\$2.3
Urbanized Divided	\$2.3
Urbanized Undivided greater than Collector	\$1.6
Urbanized Undivided Collector and below	\$1.2
Urban Interstate	\$2.3
Urban Freeway	\$1.6
Urban Divided	\$1.4
Urban Undivided greater than Collector	\$1.6
Urban Undivided Collector and below	\$1.2
Rural Interstate	\$1.2
Rural Freeway	\$1.2
Rural Divided	\$1.1
Rural Undivided greater than Collector	\$1.2
Rural Undivided Collector and below with an AADT greater than 400	\$0.875
Rural Undivided Collector and below with an AADT less than 400	\$0.650
Ramps	\$1.0

Signals and Lighting	Cost each



# TRMP Data-driven Decisions for Critical Transportation Assets

Flashers	\$5,000
Lights	\$4,000
Signalized intersections	\$250,000

Bridges/Culverts	Cost
Major Bridges	\$317 per sq. Ft.
Bridges	\$110 per sq. Ft.
Culverts (over 20 feet in length)	\$250,000 each

Interchanges	Cost each (millions)
Cloverleaf	\$1.0
Diamond	\$1.0
Directional	\$10.0
Diverging Diamond	\$2.0
Folded Diamond	\$1.0
Other	\$5.0
Partial Cloverleaf	\$1.0
Partial Diamond	\$1.0
Single Point	\$10.0
Slip Ramps	\$1.0
Trumpet	\$5.0

<b>Processes in Place to Monitor and Mitigate Risk</b>	Process		
FINANCIAL	Owner	Monitoring and Reporting	Cycle

The Financial risk category was identified by the Senior Management Team as the category with the 2nd highest impact to MoDOT. It includes risks such as uncertainty of federal funds, viability of fuel tax as a revenue source, an unstable economy, the inability to match federal funds, inflation in commodities and/or contract prices, and rising benefit costs.

		Approved by Executive Team and provided to	
Prepare an annual financial forecast	<b>Financial Services</b>	Commission	Annual
Innovative project delivery, including Practical Design;			
Design-Build; value engineering; alternative technical			
concepts; add alternates; and use of commodity indexes to	Chief Engineer,		
mitigate contractor risk of price increases, thereby improving	Design and		
bids	Districts	Monitoring through bid process and Staff Bid Review	Monthly
	Transportation		
	Planning and	Reviewed by Executive Team and approved by	
Do not fully program years 4 and 5 of the STIP	Districts	Commission	Annual
	Financial Services		
	and	Budget is reviewed by Executive Team and approved by	
Build operating budget and STIP based on results of financial	Transportation	Commission. Financial Forecast is presented to the	
forecast	Planning	Commission.	Annual
Maintain updated Asset Management Plan (statewide and			
district specific) to ensure existing system is maintained	Districts and		
before new elements are added. STIP is developed in unison	Transportation	Reviewed with Executive Team during Draft STIP	
with Asset Management Plan.	Planning	development.	Annual
Prepare monthly cash basis financial statements	Financial Services	Provided to Senior Management Team and Commission	Monthly
Prepare quarterly GAAP basis financial statements	Financial Services	Provided to Senior Management Team and Commission	Quarterly
Prepare monthly comparison of state highway user revenues			
to projections	Financial Services	Provided to Executive Team and Commission	Monthly
	Financial Services		
	and Governmental		
Monitor status of/changes to federal funding	Relations	Update SMT and Commission as necessary	As necessary

Processes in Place to Monitor and Mitigate Risk	Process		
FINANCIAL	Owner	Monitoring and Reporting	Cycle
	<b>Financial Services</b>		-
	and		
Maximize use of federal funds on projects and approved	Transportation		
operations functions	Planning	Report changes to Senior Management Team	As necessary
	Governmental		
Educate the public, legislators and employees on limitations of	Relations,		
fuel tax as an adequate ongoing source of revenue,	Community		
uncertainty of federal funding, and looming problem of	Relations and		
matching federal funds. Includes the periodic Long Range	Transportation		
Transportation Plan	Planning	Discussed as necessary for inclusion in public outreach	As necessary
Internal audit function exists and performs assessments of	Audits and	Reports audit results to Commission's Audit Committee	As necessary
internal controls	Investigations	and prepares annual report to Commission	and Annual
	Design and		
	General Services	Monthly review by management and reporting and	
	in Central Office	approval by Commission for STIP projects. No specific	
Use of competitive bidding to get best price	and Districts	reporting for non-STIP procurement	Monthly
Wellness program and active management of health care			
program to lower medical costs	Risk and Benefits	Risk and Benefits TRACKER measures	Quarterly
	Design,		
	Maintenance,		
	Transportation		
	Planning and	Review by Federal Aid program staff as projects are	
"Federalizing" more work types to provide additional match	Financial Services	entered in the federal aid computer system	Ongoing
			Ongoing -
Cost share program to leverage state resources for on-system	Cost Share		Reactivated
projects	Committee	Meeting materials and STIP amendments	January 2017
		Annual debt report and debt workshops prior to debt	
		issuance. Monitoring for any opportunities to call or	Annual and as
Conservative approach to debt management	Financial Services	refund debt.	needed

Processes in Place to Monitor and Mitigate Risk	Process		
FINANCIAL	Owner	Monitoring and Reporting	Cycle
GAPS			
Growing appropriations to Missouri State Highway Patrol			
Rapidly increasing cost of retirement and health care			
Note - The strategies in <b>BOLD</b> font have been identified by mana	gement as those most	critical to mitigating this risk.	



Processes in Place to Monitor and Mitigate	Process		
Risk - NATURAL DISASTER	Owner	Monitoring and Reporting	Cycle
The Network Disease will extend with a Company was identified by the Company	io	and as the enterior with the 6th highest increat to Mano	T It includes
The Natural Disaster risk category was identified by the Seni		- ,	i. it includes
items such as an earthquake, a blizzard, flooding, tornadoes	s, a nuciear power p	iant event, and a panaemic.	
MoDOT has an Incident Response Plan containing			
subplans to address continuity of operations and specific			
risks such as severe weather, a pandemic, radiological			
response, and an earthquake.	Maintenance	Update by Incident Response Plan Team	Annual
Use of the National Incident Management System (NIMS)			
model, developed by the Federal Emergency Management	;		
Agency, to manage incidents. Training in and use of this			
scalable incident management framework allows a		Drills conducted periodically, alone or in cooperation	
consistent response to incidents.	Maintenance	with other agencies, including disaster drills	As needed
For snow and other weather events, Emergency			
Operations Centers at Central Office and in each district			
are activated based on need. Statewide conference calls			
(multiple per day) are used to communicate weather			
predictions, evaluate resource needs and availability of			
those resources, and when necessary, mobilize crews and			
equipment to other parts of the state.	Maintenance	As needed	As needed
Inventory maintained around the state to respond to			
natural disaster (e.g. traffic control devices, fuel, steel			
girders, chemicals to fight snow, sand, sand bags, big bags)		Inventories monitored in the financial accounting	
Contracts are in place to replenish supplies.	Maintenance	system	As needed
	Risk and Benefits		
Employees receive Red Cross CPR/First Aid training	Management	Tracked for employees in MoDOT U	As needed
Maintain a radio system and train personnel in its use as a			
communication system in addition to phones and email	Maintenance	On-going	As needed



Processes in Place to Monitor and Mitigate Risk - NATURAL DISASTER	Process Owner	Monitoring and Reporting	Cycle
(MEROC) trailers allow interoperable communication.	Maintenance	On-going	As needed
GAPS			
None noted.			

Note - The strategies in **BOLD** font have been identified by management as those most critical to mitigating this risk.



Processes in Place to Monitor and Mitigate			
Risk - MAJOR TRANSPORTATION SYSTEM			
FAILURE	Owner	Monitoring and Reporting	Cycle
The Major Transportation System Failure risk category was	• •		•
MoDOT. It includes items such as a bridge collapse, conditi	ion and capacity issu	ies with I-70 and I-44, and system gridlock in the metropoli	tan areas.
All bridges are inspected in accordance with an FHWA			
approved risk based set of criteria. Inspection frequencies			
are typically 24 months; however, they may go as high as			
48 months for simple/newer bridges. Bridges in worse			
condition are inspected more frequently. Employees			
trained in bridge inspection are empowered to		Monthly status checks with report to FHWA each April	
immediately close an unsafe bridge.	Bridge	1	Annual
		Approved by Chief Engineer and reported to	
Emergency contracting authority allows for fast		Commission at the next Commission meeting following	
contractor mobilization	Design	award	As needed
Use of the National Incident Management System (NIMS)			
model, developed by the Federal Emergency Managemen	nt		
Agency, to manage incidents. Training in and use of this			
scalable incident management framework allows a		Drills conducted periodically, alone or in cooperation	
consistent response to incidents.	Maintenance	with other agencies	As needed
	Transportation		
Dedicated interstate/major bridge funding within	Planning and	Statewide Transportation Improvement Plan approved	
Commission funding distribution formula	Districts	by Executive Management and Commission	Annual
	Transportation		
	Planning and the		
Development and Implementation of an Asset	Asset		
Management Plan that strategically identifies the best us	e Management		
of very limited resources in maintaining the	Steering		
transportation system.	Committee	Plan development with annual tracker measures	Annual



Processes in Place to Monitor and Mitigate			
Risk - MAJOR TRANSPORTATION SYSTEM	Process		
FAILURE	Owner	<b>Monitoring and Reporting</b>	Cycle
	Districts and	Tracker mobility measure and programming	
Motorist Assist program and Intelligent Transportation	Highway Safety	improvements in Statewide Transportation	Quarterly
System technology mitigate congestion	and Traffic	Improvement Program	and Annual
Dynamic message boards and traveler information map	Districts and		
inform customers to mitigate impact on the traveling	Highway Safety		
public	and Traffic	On-going On-going	As needed
Aviation inspections every 3 years of public use airports		Data on one third of airports provided to FAA by	
that do not have scheduled service, to determine asset		September 30. Inspection results also provided to	
condition. FAA annually inspects airports with scheduled		airport sponsor and used to develop Statewide	
service	Multimodal	Transportation Improvement Program	Annual
Note - The strategies in <b>BOLD</b> font have been identified by r	management as the	ose most critical to mitigating this risk.	
GAPS			
Insufficient resources to rebuild I-70 and then I-44			
641 critical condition bridges with no identified funding to			
address			