



☐ CERTIFIED LAND CORNER RESTORATION (perpetuated corner or accepted corner)

☒ CERTIFIED LAND CORNER REESTABLISHMENT (lost or destroyed corner)

Description of original monument and accessories and subsequent surveys:

(reference to original and subsequent surveys including date of survey, location of survey (book and page), and surveyor of record)

Volume 520, Page 158-159 1843

Set a post for Quarter Section Corner from which red oak 8" diameter bears South 7 degrees East 202 links and burr oak 7" diameter bears North 35½ degrees West 170 links.

MHTD Route E Field Notes: Quarter Section Corner on centerline station 78+95.

Description of corner evidence found or a concise statement of the method used to reestablish this corner:

Position of corner reestablished based upon MHTD field notes, lines of occupation and distances to adjacent corner.

Set 5/8" bar and aluminum cap for corner.

Description of monument and accessories established to perpetuate the location of this corner:

(Provide a sketch of the corner on the back of this form)

Set 5/8" Bar & Aluminum Cap on Centerline Route E Station 78+95

1. 56.9 feet North 55 degrees 19 minutes West to nail/cap top of locust fence post.
2. 29.5 feet South 05 degrees 02 minutes East to nail/cap in locust corner post, fence South.
3. 32.5 feet North 06 degrees 14 minutes East to nail/cap in creosoted corner post.
4. 39.3 feet North 01 degrees 16 minutes West to hedge post, fence North.
5. 73.9 feet North 64 degrees 14 minutes 30 seconds East to nail/cap top of hedge right-of-way fence post.
6. 105.0 feet South 89 degrees 17 minutes 26 seconds East to P.O.T. station 80+00.

CORNER DESCRIPTION

CORNER OF SECTION(S)

West ¼ Corner Section 10

TOWNSHIP

RANGE

COUNTY

62

32

Gentry

CORNER COORDINATE

MISSOURI SYSTEM (1983 METRIC)

NORTH

EAST

RELATIVE POSITIONAL TOLERANCE

CONTROL STATIONS DESCRIPTION

MISSOURI COORDINATE SYSTEM (1983 METRIC)

NAME

AGENCY

NORTH

EAST

ZONE

GRID FACTOR

SURVEYORS CERTIFICATE

This is to certify I, John Teale, L.S. # 1724 have on this date June 24, 1996

☐ restored
☒ reestablished
☐ found evidence of } the corner described and that the sketch and statements contained hereon correctly represent the evidence, monuments, and accessories for this corner.

NOTE ▶

This document does not create an implied warranty by either the surveyor or the Department of Natural Resources as to conclusive evidence of the corner location.

I, the undersigned STATE LAND SURVEYOR, do hereby certify that the foregoing instrument was filed for record with the MISSOURI DEPARTMENT OF NATURAL RESOURCES, DIVISION OF GEOLOGY AND LAND SURVEY.

STATE LAND SURVEYOR

DATE

CORNER INDEX NO.



DOCUMENT NUMBER

July 3, 1996

G-13


600-57985

SKETCH OF CORNER

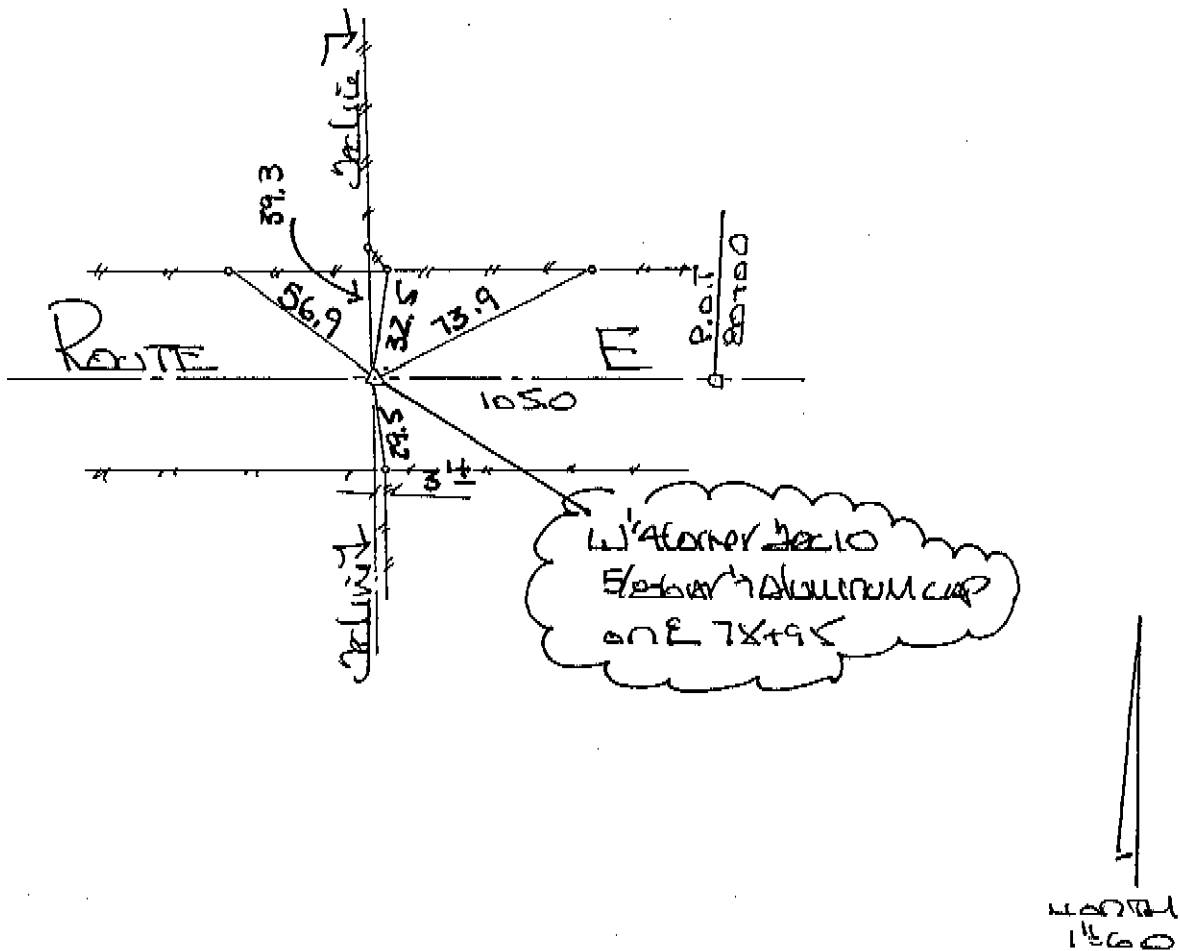

Set 5/8" Bar & Aluminum Cap on Centerline Route E Station 78+95

1. 56.9 feet North 55 degrees 19 minutes West to nail/cap top of locust fence post.
2. 29.5 feet South 05 degrees 02 minutes East to nail/cap in locust corner post, fence South.
3. 32.5 feet North 06 degrees 14 minutes East to nail/cap in creosoted corner post.
4. 39.3 feet North 01 degrees 16 minutes West to hedge post, fence North.
5. 73.9 feet North 64 degrees 14 minutes 30 seconds East to nail/cap top of hedge right-of-way fence post.
6. 105.0 feet South 89 degrees 17 minutes 26 seconds East to P.O.T. station 80+00.

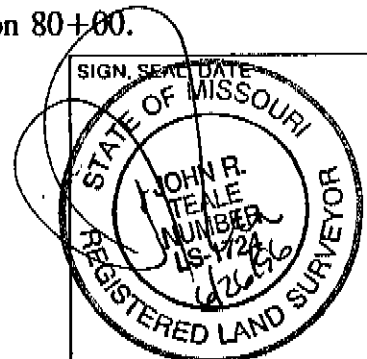

Sheet 2 of 2

DOCUMENT NUMBER

600-57985