



ADDENDUM #1

City of Washington, Missouri
2024 Parking Lot Project
February 1, 2024

1. Plan sheets 2 and 5 and specifications bid sheet have been modified to include the following. These changes are a result of changing the scope of work at 5th and Stafford Street parking lot to replace milling with completed asphalt tear out and increasing pavement thickness from 2" to 3" of asphalt.
 - a. Bid Sheet Line Item #3- Milling
 - i. Original quantity/units = 6,935 TON
 - ii. New quantity/units = **6,730 TON**
 - b. Bid Sheet Line Item #4- Asphalt BP-2
 - iii. Original quantity/units = 2,285 TON
 - iv. New quantity/units = **2,300 TON**
 - c. Bid Sheet Line Item #10- Remove existing asphalt and compact existing base rock
 - v. New quantity/units = **205 SY**

Estimated Quantities Bid Sheet is attached and includes all addenda revisions. Replace Bid Sheet page 14 in the current specifications with the attached Bid Sheets.

The updated plan Sheets 2 and 5 are attached. Replace Sheets 2 and 5 in the plans with the updated plan.

Thank you,

Charles Stankovic PE
City Engineer

Attachments

Received Addendum #1:

By: _____


Company Name: _____

Date: _____

Please return signed addendum to gvanek@washmo.gov


Item	Description	Quantity	Unit
1	Mobilization	1	LS
SITE WORK ITEMS			
2	Finish grading (Rock to be provided)	1	LS
ASPHALT ITEMS			
3	Milling	6,730	SY
4	Asphalt BP-2	2,300	TON
5	6" Asphalt Curb	300	LF
10	Remove existing asphalt and compact existing base rock	205	SY
TRAFFIC CONTROL ITEMS			
6	Channelizers	50	EA
7	ROAD WORK AHEAD (W20-1) Sign 48" x 48"	2	EA
8	BE PREPARED TO STOP (W3-4) Sign 48" x 48"	2	EA
9	Flagger Symbol Sign (W20-7a) 48" x 48"	2	EA

CITY OF WASHINGTON
ENGINEERING DEPARTMENT
405 JEFFERSON STREET
WASHINGTON, MISSOURI 63090
(636) 390-1010

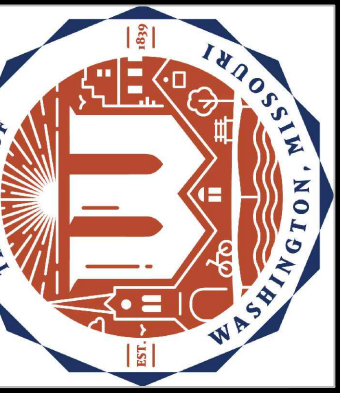

**CITY OF WASHINGTON
2024 PARKING LOT
ASPHALT PAVING PLANS**

Number	Description
1	2-1-2024 Addendum 1

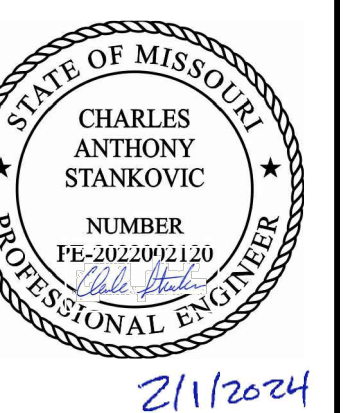


CHARLES STANKOVIC, P.E.
PE #2022002120
CITY ENGINEER

DATE:
02/01/24


CHECKED BY:
AFL

DRAWN BY:
CAS

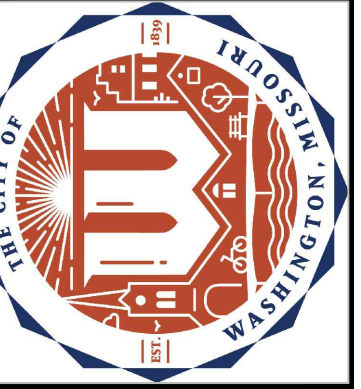

**CITY OF WASHINGTON
 2024 PARKING LOT
 ASPHALT PAVING PLANS**

REVISIONS	
Number	Description
1	2-1-2024 Addendum 1

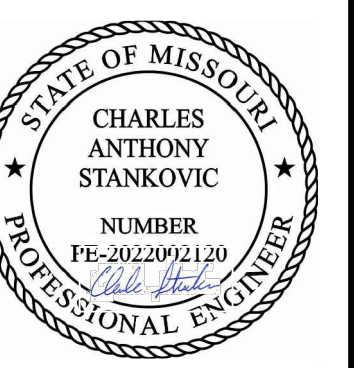

CHARLES STANKOVIC, P.E.
 PE #2022092120
 CITY ENGINEER

DATE:
 02/01/24

CHECKED BY:
 AFL

DRAWN BY:
 CAS

SHEET: PLAN SHEET
 SHEET 5 of 7

Remove existing asphalt
 and compact existing base rock
 1 - 3" Lift of Asphalt BP-2

Asphalt under
 air conditioning units
 to Remain in place


5th Street

Stafford Street



Legend

- 2" Asphalt BP-2
- 3" Asphalt BP-2

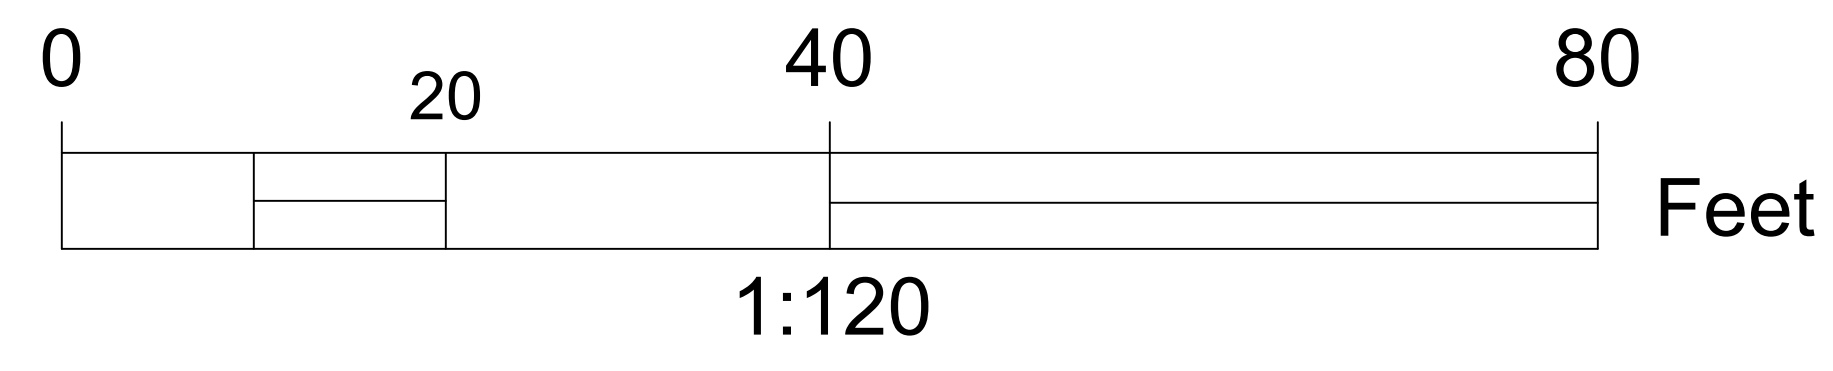

5th and Stafford Street Parking Lot



2024 PARKING LOT PROJECT		Contractor Name: _____			
BID SHEET					
Item	Description	Quantity	Unit	Unit Cost	Total
1	Mobilization	1	LS		
SITE WORK ITEMS					
2	Finish grading (Rock to be provided)	1	LS		
ASPHALT ITEMS					
3	Milling	6,730	SY		
4	Asphalt BP-2	2,300	TON		
5	6" Asphalt Curb	300	LF		
10	Remove existing asphalt and compact existing base rock	205	SY		
TRAFFIC CONTROL ITEMS					
6	Channelizers	50	EA		
7	ROAD WORK AHEAD (W20-1) Sign 48" x 48"	2	EA		
8	BE PREPARED TO STOP (W3-4) Sign 48" x 48"	2	EA		
9	Flagger Symbol Sign (W20-7a) 48" x 48"	2	EA		
BID PROJECT TOTAL					

Updated Per Addendum #1 on 2-1-2024