



Mayor James W. McGee

**Federal Project
NORTH AND SOUTH ROAD SIDEWALK
IMPROVEMENTS – PHASE II
STP-9901(655)**

**ADDENDUM #2
Issued: October 10, 2024**

Description of Addendum:

1. **Change of Bid Opening Date.** The bid opening stated in the Advertisement for Road Work – Notice to Contractors and the Notice to Contractors is amended to read:

Sealed bids for Federal Project No. STP-9901 (655) "North and South Road Sidewalk Improvements – Phase II" will be received by the City of Vinita Park, City Hall, 8374 Midland Boulevard, Vinita Park, Missouri 63114, until **10:00 o'clock A.M. local time on the 17th day of October 2024 (Thursday)** and at that time will be publicly opened and read. All bids shall be submitted in the form of paper copies.
2. The TYPE "C" ASPHALTIC CONCRETE quantity on the Summary of Quantities and Itemized Bid Form incorrectly reads 8 tons. The value is 69 tons consistent with the schedules. Accordingly, the following documents replace the incorrect items in the plans and contract documents:
 - a. "QUANTITIES 1 OF 5", Sheet 8 of 62, is deleted in its entirety and replaced with the following sheet entitled "QUANTITIES 1 OF 5" with an Addendum 2, dated October 10, 2024, notation.
 - b. "ITEMIZED BID FORM" replaces the itemized bid form shown on Page 11 of the bid package PDF document (following Page 6 of the Notice to Contractors).

End of Addendum #2.


The Contractor shall acknowledge this addendum on the Bid Form.

PREPARED BY



411 North 10th Street, Suite 200
St. Louis, Missouri 63101

SUMMARY OF QUANTITIES

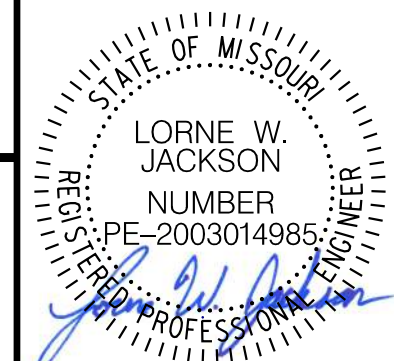

DISCLAIMER
I hereby specify that the documents intended to be authorized by my seal are limited to this sheet, and I hereby disclaim any responsibility for all other Drawings, Specifications, Estimates, Reports or other documents or instruments relating to or intended to be used for any part of the engineering project or survey.

LINE NO.	SPECIFICATION	PAY ITEM	ITEM DESCRIPTION	UNIT	QUANTITY
ROADWAY					
1	MODOT	2022010	REMOVAL OF IMPROVEMENTS	LS	1
2	MODOT	2071000	LINEAR GRADING CLASS 1	STA	50.6
3	MODOT	3040504	TYPE 5 AGGREGATE FOR BASE (4 IN. THICK)	SQ YD	1437
4	MODOT	3040506	TYPE 5 AGGREGATE FOR BASE (6 IN. THICK)	SQ YD	224
5	ST. LOUIS CO.	404-30.10	TYPE "C" ASPHALTIC CONCRETE	TONS	69
6	ST. LOUIS CO.	407-10.10	TACK-LIQUID ASPHALT	GAL	7.0
7	ST. LOUIS CO.	408-10.10	PRIME-LIQUID ASPHALT	GAL	23.0
8	ST. LOUIS CO.	607-01.48	CHAIN LINK FENCE (48")	LF	290
9	ST. LOUIS CO.	607-01.60	CHAIN LINK FENCE (60")	LF	35
10	ST. LOUIS CO.	607-10.48	WALK GATE, CHAIN LINK (48")	EA	1
11	ST. LOUIS CO.	607-30.00	HANDRAIL (GALVANIZED PIPE)	LF	12
12	JSP	607-42.72	REMOVE AND REPLACE EXISTING FENCE (72" VINYL)	LF	24
13	JSP	607-50.42	NEW WOOD FENCE (42" PICKET)	LF	74
14	JSP	607-50.72	NEW WOOD FENCE (72" PRIVACY)	LF	301
15	ST. LOUIS CO.	608-50.06	PAVED DRIVEWAY APPROACH (6")	SQ YD	817
16	ST. LOUIS CO.	608-70.00	CONCRETE STEPS	SQ FT	20
17	MODOT	6091010	CONCRETE CURB (6 IN. HEIGHT AND UNDER) TYPE 5	LF	883
18	MODOT	6091011	CONCRETE CURB (OVER 6 IN. HEIGHT) TYPE 5	LF	156
19	ST. LOUIS CO.	609-10.52	CURB AND GUTTER, TYPE "B" (2'-6")	LF	5483
20	JSP	6169901	TRAFFIC CONTROL	LS	1
21	MODOT	6181000	MOBILIZATION	LS	1
22	MODOT	6191000	PAVEMENT EDGE TREATMENT	LF	5621
23	MODOT	6221001	COLDMILLING BITUMINOUS PAVEMENT FOR REMOVAL OR SURFACING (3 IN. THICK OR LESS)	SQ YD	288
24	MODOT	6274000	CONTRACTOR FURNISHED SURVEYING AND STAKING	LS	1
25	JSP	703-90.15	MODULAR BLOCK WALL (h<4')	SQ FT	354
26	MODOT	8061016	SEDIMENT REMOVAL	CU YD	3
27	ST. LOUIS CO.	806-45.08	INLET PROTECTION DEVICE, SINGLE UNIT - FILTER SOCK/ROLL	EA	12
28	ST. LOUIS CO.	806-45.09	INLET PROTECTION DEVICE, DOUBLE UNIT - FILTER SOCK/ROLL	EA	2
29	MODOT	801019	SILT FENCE	LF	600
30	MODOT	8031000A	TURF TYPE TALL FESCUE SODDING	SQ YD	1638
DRAINAGE					
31	MODOT	2031000	CLASS A EXCAVATION	CU YD	12
32	ST. LOUIS CO.	206-45.05	SELECT GRANULAR BACKFILL	CU YD	8
33	ST. LOUIS CO.	604-12.01	SINGLE CURB INLET, UNTRAPPED	EA	1
34	ST. LOUIS CO.	604-13.01	SINGLE CURB INLET, TRAPPED	EA	1
35	ST. LOUIS CO.	604-25.40	CONVERT INLET TO MANHOLE AND ADJUST TO GRADE	EA	2
36	ST. LOUIS CO.	604-90.40	ADJUST INLET STONE TO GRADE	EA	2
37	MODOT / JSP	7261015	15 IN. PIPE GROUP A	LF	25
SIGNING/STRIPING/SIGNALS					
38	MODOT	6205906A	12 IN. WHITE HIGH BUILD WATERBORNE PAVEMENT MARKING PAINT, TYPE L BEADS	LF	161
39	MODOT	6206124A	24 IN. WHITE STANDARD WATERBORNE PAVEMENT MARKING PAINT, TYPE P BEADS	LF	27
40	JSP	9039901	REMOVE AND REPLACE SIGNS	EA	28
PEDESTRIAN FACILITIES					
41	MODOT	3040504	TYPE 5 AGGREGATE FOR BASE (4 IN. THICK)	SQ YD	3119
42	MODOT	6086004	CONCRETE SIDEWALK, 4 IN.	SQ YD	2958
43	ST. LOUIS CO.	608-60.07	CONCRETE SIDEWALK, CURB RAMP (7" THICK)	SQ YD	161
44	ST. LOUIS CO.	608-60.98	TRUNCATED DOMES FOR CURB RAMPS (NEW CONSTRUCTION)	SQ FT	305

2

REV	DATE	BY	DESCRIPTION
1	10-10-2024	LDT	ADDENDUM No. 2

LOCHMUELLER GROUP
411 N 10TH STREET, SUITE 200
SAINT LOUIS, MISSOURI 63101
P (314) 621-3395 F (314) 621-3288
WWW.LOCHGROUP.COM
MISSOURI STATE ENGINEERING CORPORATION
CERTIFICATE/LICENSE NO. 2002011852

NORTH AND SOUTH SIDEWALK IMPROVEMENTS PHASE 2
QUANTITIES
1 OF 5

PROJECT/JOB NO.
STP-9901(655)
MSD PROJECT NO.
24TMP-000387
MSD BASE MAP
15K3, 16K2
DATE PREPARED
5/8/2024
SHEET
8 OF 62

ITEMIZED BID FORM

(Page 1 of 1)

Route: North and South Road
County: St. Louis
Agency: City of Vinita Park
Project No.: STP-9901(655) - TIP# 6752A-21

LINE NO.	PAYITEM	DESCRIPTION	UNIT	QUANTITY	UNIT COST	ITEM COST
ROADWAY						
1	2022010	REMOVAL OF IMPROVEMENTS	LS	1		
2	2071000	LINEAR GRADING CLASS 1	STA	50.6		
3	3040504	TYPE 5 AGGREGATE FOR BASE (4 IN. THICK)	SQ YD	1437		
4	3040506	TYPE 5 AGGREGATE FOR BASE (6 IN. THICK)	SQ YD	224		
5	404-30.10	TYPE "C" ASPHALTIC CONCRETE	TONS	69		
6	407-10.10	TACK-LIQUID ASPHALT	GAL	7		
7	408-10.10	PRIME-LIQUID ASPHALT	GAL	23		
8	607-01.48	CHAIN LINK FENCE (48")	LF	290		
9	607-01.60	CHAIN LINK FENCE (60")	LF	35		
10	607-10.48	WALK GATE, CHAIN LINK (48")	EA	1		
11	607-30.00	HANDRAIL (GALVANIZED PIPE)	LF	12		
12	607-42.72	REMOVE AND REPLACE EXISTING FENCE (72" VINYL)	LF	24		
13	607-50.42	NEW WOOD FENCE (42" PICKET)	LF	74		
14	607-50.72	NEW WOOD FENCE (72" PRIVACY)	LF	301		
15	608-50.06	PAVED DRIVEWAY APPROACH (6")	SQ YD	817		
16	608-70.00	CONCRETE STEPS	SQ FT	20		
17	6091010	CONCRETE CURB (6 IN. HEIGHT AND UNDER) TYPE S	LF	883		
18	6091011	CONCRETE CURB (OVER 6 IN. HEIGHT) TYPE S	LF	156		
19	609-10.52	CURB AND GUTTER, TYPE "B" (2'-6")	LF	5483		
20	6169901	TRAFFIC CONTROL	LS	1		
21	6181000	MOBILIZATION	LS	1		
22	6191000	PAVEMENT EDGE TREATMENT	LF	5621		
23	6221001	COLDMILLING BITUMINOUS PAVEMENT FOR REMOVAL OR SURFACING (3 IN. THICK OR LESS)	SQ YD	288		
24	6274000	CONTRACTOR FURNISHED SURVEYING AND STAKING	LS	1		
25	703-90.15	MODULAR BLOCK WALL (h<4')	SQ FT	354		
26	8061016	SEDIMENT REMOVAL	CU YD	3		
27	806-45.08	INLET PROTECTION DEVICE, SINGLE UNIT - FILTER SOCK/ROLL	EA	12		
28	806-45.09	INLET PROTECTION DEVICE, DOUBLE UNIT - FILTER SOCK/ROLL	EA	2		
29	801019	SILT FENCE	LF	600		
30	8031000A	TURF TYPE TALL FESCUE SODDING	SQ YD	1638		
					ROADWAY SUBTOTAL	
DRAINAGE						
31	2031000	CLASS A EXCAVATION	CU YD	12		
32	206-45.05	SELECT GRANULAR BACKFILL	CU YD	8		
33	604-12.01	SINGLE CURB INLET, UNTRAPPED	EA	1		
34	604-13.01	SINGLE CURB INLET, TRAPPED	EA	1		
35	604-25.40	CONVERT INLET TO MANHOLE AND ADJUST TO GRADE	EA	2		
36	604-90.40	ADJUST INLET STONE TO GRADE	EA	2		
37	7261015	15 IN. PIPE GROUP A	LF	25		
					DRAINAGE SUBTOTAL	
SIGNING/STRIPING/SIGNALS						
38	6205906A	12 IN. WHITE HIGH BUILD WATERBORNE PAVEMENT MARKING PAINT, TYPE L BEADS	LF	161		
39	6206124A	24 IN. WHITE STANDARD WATERBORNE PAVEMENT MARKING PAINT, TYPE P BEADS	LF	27		
40	9039901	REMOVE AND REPLACE SIGNS	EA	28		
					SIGNING/STRIPING/SIGNALS SUBTOTAL	
PEDESTRIAN FACILITIES						
41	3040504	TYPE 5 AGGREGATE FOR BASE (4 IN. THICK)	SQ YD	3119		
42	6086004	CONCRETE SIDEWALK, 4 IN.	SQ YD	2958		
43	608-60.07	CONCRETE SIDEWALK, CURB RAMP (7" THICK)	SQ YD	161		
44	608-60.98	TRUNCATED DOMES FOR CURB RAMPS (NEW CONSTRUCTION)	SQ FT	305		
					PEDESTRIAN FACILITIES SUBTOTAL	
					CONSTRUCTION TOTAL	