

**CITY OF BRANSON, MISSOURI
PURCHASING DEPARTMENT**

**REQUEST FOR BID 2860-05A, 2860-05B, 2860-05C, 2860-05D
W 76 Country Blvd Streetscape – Segments 1 and 2**

**James Morris, Bid Coordinator
City of Branson, Purchasing Office
110 W. Maddux St., Suite 200
Branson, MO 65616**

**Date Issued: 7/17/2026
Buyer's Email: jmorris@bransonmo.gov
Telephone: (417) 337-8553 Ext. 1407
DUE DATE: 7/31/2026 at 9:00 AM**

Addendum No. 4

Vendors are directed to the documents attached following this Addendum Acknowledgement. Vendors are solely responsible for reviewing all attached materials in their entirety and ensuring their bid submission reflects any applicable changes contained therein.

**ALL BIDDERS ARE REQUESTED TO SIGN THE ACKNOWLEDGMENT BELOW AND
INCLUDE WITH BIDS TO CONFIRM RECEIPT OF ADDENDUM #4**

**Signature
Acknowledged by Bidder**

End of Addendum No. 4

Addendum NO 4

ISSUED BY: Great River Engineering
2826 S. Ingram Mill Rd.
Springfield, Missouri 65804
(417) 886-7171
(417) 886-7591 --- FAX

DATE: July 17, 2026

FOR: W 76 Country Boulevard Streetscape Improvements,
Contracts EN7622, SNS0032 &
W 76 Country Blvd Median Improvements
Contracts TAP-9901(886) and STP-0761(023)
GRE Project 4515



The attached revisions hereby supersede any and all data with which they may conflict as indicated on the Drawings, Specifications and related documents issued in the original set. Each trade is responsible for changes in its work caused by changes in the work of other trades. This addendum is a part of and shall be attached to the original sets of plans and specifications for the work.

Notification: There have been 3 addendums issued prior to this addendum. See Addendums 1 through 3.


CHANGES: To Contracts TAP-9901(886) and STP-0761(023)

1. Change Contract Bid Items – STP-0761(023) Elements will include all median improvement pavement elements. TAP-9901(886) Elements will include all non-paving median improvement elements.
 - a. Delete TAP-9901(886)/STP-0761(023) Plan Sheet 7 of 34
 - b. Revise TAP-9901(886)/STP-0761(023) Plan Sheet 6 of 34
 - i. Delete Note 7.

NOTES

1. ALL HAWK SIGNAL, WIRING, CONTROLLERS, PULL BOXES, ETC. ARE PART OF TAP FUNDING.
2. ALL STREET LIGHTS AND STREET LIGHT CONDUIT NOT TO BE INCLUDED IN TAP FUNDING.
3. SIDEWALK, CURB AND GUTTER, STRIPING, AND OTHER PAVEMENTS LOCATED OUTSIDE OF TAP AND OUTSIDE OF STP LIMITS NOT TO BE INCLUDED IN EITHER FUNDING.
4. PROVIDE DOWELED STEEL REINFORCING FOR ALL LONGITUDINAL JOINTS IN CONCRETE PAVEMENTS.
5. CONCRETE MATERIAL AND FINISHES FOR ALL CURB RAMPS SHALL MATCH THE MATERIAL AND FINISH OF THE ADJOINING SIDEWALK.
6. ALL PAVEMENT IMPRINTING PATTERNS FOR PEDESTRIAN PATHS SHALL MEET THE REQUIREMENTS OF PROWAG 302.6 WITH REGULAR DISCONTINUITY OF SURFACE LESS THAN 1/4 INCH.
7. ~~TRUCK APRON PAVEMENT, SEE SHEET 07 FOR STP PAY LIMITS.~~
8. CONTRACTOR SHALL PROVIDE PAVEMENT IMPRINTING PATTERNS, MATERIAL AND MOCK UPS FOR APPROVAL PRIOR TO INSTALLATION.
9. PROVIDE STEEL REINFORCED TIES FOR ALL INTEGRALLY CAST CURB SECTIONS.
10. ALL PAVEMENT AND CURBING CONCRETE SHALL HAVE AN F_c of 4,000 PSI WITH A MINIMUM OF 4 % AIR ENTRAINMENT.

- ii. Revise Pay Limits as shown below (Sheet following).

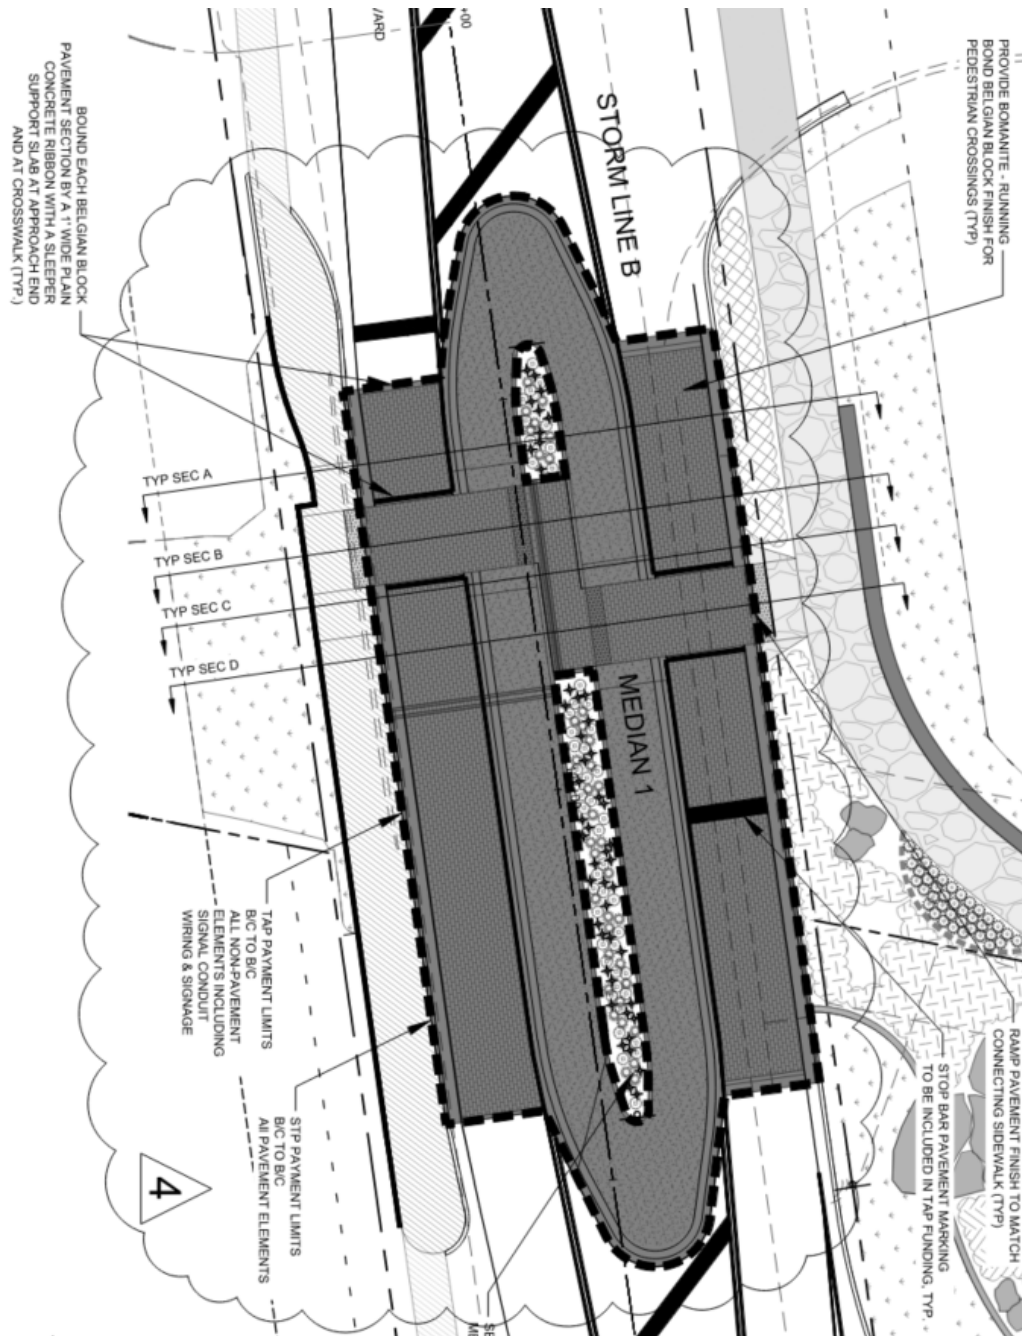

c. Delete TAP-9901(886)/STP-0761(023) Plan Sheet 7 of 34.

d. Replace TAP-9901(886) Bid Form with the revised bid form attached.

i. Pavement elements deleted from Bid and Moved to STP-0761(023) Bid form

e. Replace STP-0761(023) Bid Form with the revised bid form attached.

i. Pavement elements Moved to Bid from TAP-9901(886) Bid form.

2. Replace SNS 0032 Bid Form with the revised Bid Form attached.

a. Change Item 46 WRC – Vaults to Installation of WRE provided vaults per addendum 2 clarifications.

3. Replace EN7622 Bid Form with the revised Bid Form attached.

- a. Added WRE conduit and vault installation only bid items for White River Electric Fiber conduit (3") and all vault structures per addendum 2 clarifications.
- b. Adjusted quantities for remaining full contractor supplied material and installation elements.
- c. Revised Irrigation System to Lump Sum Item.
- d. Added out of corridor utility trenching.
- e. Added narrowed 4' utility corridor trench in front of Cici's site.
- f. Adjusted landscape bid item quantities.

CLARIFICATIONS: The following clarifications do not change the plans, specifications or conditions of the project, but are provided based on inquiries regarding the plans.

1. **JSP for colored concrete references both integral color and color hardening. Are both required?**
Yes. The contractor will provide integrally colored concrete with color hardening surface applied coloring.
2. **STP-0761(023) Bid Item for Bomanite LA PAZ Pavement Unit of Measure is SF not SY.** See revised Bid Form Attached.
3. **Wavy Wall Details.** See revised sheet LP 38 issued with Addendum No. 2. No Spread footings are required. See reinforcement requirements on same sheet. See drain details, and turf attachment details.
4. **Curb Ramps vs Curb Ramp Approaches –** Curb ramps and Curb Ramp Approaches are the same item and refer to required shaping and sloping approaches to match landings at pavement crossings and driveways. Pavement costs are included in the respective pavement quantities. The "Curb Ramp" quantity shown in the TAP9901(886) Bid Form was a duplicate quantity and has been removed from the revised bid forms attached.

Attachments

- Revised Bid Form EN7622
- Revised Bid Form SNS0032
- Revised Bid Form TAP 9901(886)
- Revised Bid Form STP 0761(023)

There are no other clarifications or changes included with this Addendum.

W. 76 COUNTRY BLVD. MEDIAN IMPROVEMENTS
TAP - 9900(886)
BID FORM

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
<u>TAP-9901(886) BID ITEMS</u>					
1	MOBILIZATION	1	LS	_____	_____
2	CONTRACTOR SUPPLIED TESTING - QUALITY CONTROL	1	LS	_____	_____
3	CONTRACTOR SUPPLIED SURVEY STAKING	1	LS	_____	_____
TAP MEDIAN PLANS					
4	SIGNS W/MOUNTING BRACKETS	169	SF	_____	_____
5	THERMOPLASTIC PAVEMENT MARKING - SOLID YELLOW 6"	3559	LF	_____	_____
6	THERMOPLASTIC - YELLOW DIAGONAL CHEVRONS 24"	945	SF	_____	_____
7	THERMOPLASTIC PAVEMENT MARKING - 6" SOLID WT STRIPE	438	LF	_____	_____
8	THERMOPLASTIC - DIAGONAL CHEVRONS WT 24"	177	SF	_____	_____
9	THERMOPLASTIC - 24" SOLID WT STOP BAR	330	SF	_____	_____
10	POST, TYPE CL, 15 FT. ARM W/ A-9 BASE	7	EA	_____	_____
11	POST, TYPE CL, 18.5 FT. ARM W/ A-9 BASE	1	EA	_____	_____
12	POST, W TYPE C BASE	16	EA	_____	_____
13	4" POST, W 4" BREAKAWAY BASE	8	EA	_____	_____
14	PED SIGNAL HEAD	16	EA	_____	_____
15	ACCESSIBLE PEDESTRIAN SIGNAL DET	16	EA	_____	_____
16	CONDUIT, 2 IN. RIGID, IN TRENCH	445	LF	_____	_____
17	CONDUIT, 3 IN. RIGID, IN TRENCH	954	LF	_____	_____
18	TRENCHING TYPE I	1399	LF	_____	_____
19	POWER SUPPLY	4	EA	_____	_____
20	CONTROLLER CABINET W/MCCAIN ATC FLEX CONTROLLER	4	EA	_____	_____
21	PULL BOX, PREFORMED CLASS 1	12	EA	_____	_____

**TAP - 9900(886)
BID FORM**

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
<u>TAP-9901(886) BID ITEMS</u>					
22	CABLE, 2 AWG 1 CONDUCTOR	1146	LF	_____	_____
23	CABLE, 12 AWG 1 CONDUCTOR	11403	LF	_____	_____
24	CABLE, 16 AWG 1 CONDUCTOR	26104	LF	_____	_____
25	CABLE, 6 AWG GROUNDING 1 CONDUCTOR	1519	LF	_____	_____
26	4" PVC IRRIGATION CONDUITS	384	LF	_____	_____
27	TAPCO SAFEWALK ILLUMINATOR	16	EA	_____	_____
28	TAPCO VIZMARK ILLUMINATOR	8	EA	_____	_____
29	MIOVISION SMARTVIEW 360 CAMERA WITH CORE DCM (IN CONTROLLER CAB)	4	EA	_____	_____
30	2" STEEL SIGN POSTS W/RECIEVER BASE.	9	EA	_____	_____
31	SPARE CONDUIT, 4 IN. RIGID, IN TRENCH	388	LF	_____	_____
32	HYBRID HAWK SIGNAL HEAD W/BACKPLATE	16	EA	_____	_____
TAP-9901-(886) BID TOTAL:					_____

W. 76 COUNTRY BLVD. MEDIAN IMPROVEMENTS
STP-0761(023)
BID FORM

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
<u>STP-0761(023) BID ITEMS</u>					
1	TRUNCATED DOMES	320	SF	_____	_____
2	CURB AND GUTTER TYPE CG-1	510	LF	_____	_____
3	CURB AND GUTTER TYPE C-1 (LANDSCAPE)	790	LF	_____	_____
4	CONCRETE CURB LOW PROFILE CG-2 (MOUNTABLE)	959	LF	_____	_____
5	STAMPED 9" CONC CROSSWALK & APPROACH (W/12" HDRS)	7480	SF	_____	_____
6	TYPE 1 AGGREGATE FOR BASE (4 IN. THICK)	61	SY	_____	_____
7	TRUCK APRON W/BOMANITE LA PAZ RANDOM STONE FINISH	5610	SF	_____	_____
8	TYPE 1 AGGREGATE FOR BASE (6 IN. THICK)	6441	SY	_____	_____
9	CONCRETE SLEEPER SLABS	175	SY	_____	_____
STP-0761(023) BID TOTAL:					_____

W. 76 COUNTRY BLVD. STREETSCAPE - SEGMENTS 1 & 2 - MODOT SNS0032
BID FORM - BASE BID

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
1	MOBILIZATION	1	LS		
2	CONTRACTOR SUPPLIED TESTING - QUALITY CONTROL	1	LS		
3	CONTRACTOR SUPPLIED SURVEY STAKING	1	LS		
	REMOVALS				
4	REMOVALS AND DISPOSAL	1	LS		
	STORM SYSTEM IMPROVEMENTS				
5	GRATE INLET (2'X3')	19	EA		
6	CONVERT EX INLETS TO JB'S	13	EA		
7	CONCRETE HEADWALL	1	CY		
8	18" FLARED END SECTION	1	EA		
9	18" STORM SEWER PIPE	269	LF		
10	15" STORM SEWER PIPE	147	LF		
11	12" STORM SEWER PIPE	111	LF		
12	NEW GRATE INLET (4X4)	2	EA		
	WATER SYSTEM IMPROVEMENTS				
13	6" FIRE HYDRANT ASSEMBLIES (TEE, VALVE & HYD)	7	EA		
14	COMMERCIAL FIRE LINE CONNECTIONS	3	EA		
15	10" WATERLINE RJ - C900 (NEW)	160	LF		
16	12" WATERLINE RJ - C900 (NEW)	2378	LF		
17	12" WATERLINE RJ 11.25 BEND (NEW)	6	EA		
18	12" WATERLINE RJ 22.50 BEND (NEW)	4	EA		
19	12" WATERLINE RJ 45 BEND (NEW)	4	EA		
20	24" STEEL SLEEVE (NEW)	279	LF		
21	6" C900 PVC WATERMAIN (FIRE CONNECTION EXT)	30	LF		
22	NEW 2" METER, SETTER AND PIT	2	EA		
23	NEW 2" DOUBLE METER, SETTER AND PIT	2	EA		
24	3/4" METER, SETTER, AND PIT	1	EA		
25	1" METER, SETTER, AND PIT	2	EA		
26	12" RJ GATE VALVES	6	EA		
27	10" RJ GATE VALVES	2	EA		
28	8" RJ GATE VALVES	2	EA		
29	12"X12"X6" RJ TEE	1	EA		
30	12"X12"X8" RJ TEE	2	EA		
31	12"X12"X10" RJ TEE	2	EA		

W. 76 COUNTRY BLVD. STREETSCAPE - SEGMENTS 1 & 2 - MODOT SNS0032

BID FORM - BASE BID

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
UTILITY CORRIDOR					
32	TRENCHING - 5' CORRIDOR NORMAL DEPTH	1674	LF		
33	TRENCHING - 8' CORRIDOR NORMAL DEPTH (W/NAT GAS)	863	LF		
34	2" PE CONDUIT - ALTICE - COPPER AND FIBER	2698	LF		
35	2" GREY PE CONDUIT - WRC	5188	LF		
36	4" GREY PVC CONDUIT - BS - SHO-ME - ALTICE	12449	LF		
37	4" GREY PVC 90DEG ELBOW/SWEEP - BS-SHO-ME - ALTICE	18	EA		
38	4" GREY PVC 45DEG ELBOW/SWEEP - BS-SHO-ME - ALTICE	20	EA		
39	4" GREY PVC 22 1/2DEG ELBOW/SWEEP - BS-SHO-ME - ALTICE	20	EA		
40	4" GREY PVC 11 1/4DEG ELBOW/SWEEP - BS-SHO-ME - ALTICE	25	EA		
41	ALTICE VAULTS	8	EA		
42	ALTICE PEDESTALS	2	EA		
43	SHO-ME TECH VAULT	2	EA		
44	BRIGHTSPEED HAND HOLE VAULTS	4	EA		
45	BRIGHTSPEED PEDESTALS	4	EA		
46	WRC - VAULTS INSTALLATION (VAULTS PROVIDED BY WRE)	6	EA		
47	DUAL 2" WHT PE CONDUIT - LIGHTING	2324	LF		
48	6" PVC CONDUIT - BRANSON	5074	LF		
49	6" PVC 90 DG SWEEPS - BRANSON	72	EA		
50	6" PVC 45 DG SWEEPS - BRANSON	8	EA		
51	6" PVC 22 1/2 DG SWEEPS - BRANSON	8	EA		
52	6" PVC 11 1/4 DG SWEEPS - BRANSON	12	EA		
53	BREAKOUT VAULTS 5X5 - BRANSON	8	EA		

W. 76 COUNTRY BLVD. STREETScape - SEGMENTS 1 & 2 - MODOT SNS0032

BID FORM - BASE BID

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
PAVEMENT					
54	ASPHALT MILLING 2"	10984	SY		
55	CONCRETE SIDEWALK, 4 IN. - BROOM FINISHED (TIE IN)	128	SY		
56	CONCRETE SIDEWALK - COLORED IMPRINTED, 6 IN.	2851	SY		
57	CONCRETE SIDEWALK SEALING	3116	SY		
58	CONCRETE CURB RAMP APPROACH (DRIVE AND ROAD)	21	EA		
59	TRUNCATED DOMES - VANGUARD BLACK	96	SF		
60	TYPE 1 AGGREGATE FOR BASE (4 IN. THICK)	2617	SY		
61	TYPE 1 AGGREGATE FOR BASE (6 IN. THICK)	2441	SY		
62	ASPHALT FULL DEPTH PAVEMENT 11"	2441	SY		
63	ASPH CONCRETE (2" BITUMINOUS OVERLAY)	10984	SY		
64	CURB AND GUTTER TYPE CG-1	4008	LF		
65	CURB AND GUTTER MODOT TYPE A TO CG-1 TRANSITION	20	LF		
66	TYPE C-1 CURB	63	LF		
DRIVEWAYS					
67	DRIVE SUBGRADE PREPARATION	2799	SY		
68	GRADING FOR GUTTER SWALE ALONG EDGE OF ROAD	751	LF		
69	GRADING FOR ADA PATH CROSS SLOPE ACROSS DRIVE	329	LF		
70	6" ASPHALTIC CONC PAVEMENT WITH 6" COMP AGG BASE	1313	SY		
71	CONC DRIVE SIDEWALK CROSSING COLORED AND IMPRINTED 8"	265	SY		
72	8" CONCRETE DRIVEWAY APPROACH PAVEMENT W/AGG BASE	1031	SY		
73	DUAL 6" PVC ANCILLARY SERVICE CONDUITS	314	LF		
74	MARKERS FOR CONDUIT ENDS	32	EA		
75	TYPE CG-1 CURB AND GUTTER - SPILL AND CATCH	854	LF		

TOTAL BASE BID: _____

W. 76 COUNTRY BLVD. STREETScape - SEGMENTS 1 & 2 - MODOT SNS0032

BID FORM - BASE BID

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
----------------	--------------------	-----------------	-------------	-------------------	------------------

BID FORM - ALTERNATE BID

56 a	DELETE ITEM 56 - CONCRETE SIDEWALK - COLORED IMPRINTED 6 IN FROM BID	-2851	SY	-	
56b	STD 6' CONCRETE BROOM FINISHED SIDEWALK IN LEIU OF COLORED AND IMPRINTED CONCRETE PAVEMENT.	2851	SY		
71a	DELETE CONC DRIVE SIDEWALK CROSSING COLORED AND IMPRINTED 8"	-265	SY	-	
72a	ADD QUANTITY 8" CONCRETE DRIVEWAY APPROACH PAVEMENT W/AGG BASE	265	SY		
	<i>(REVISED TOTAL QUANTITY 8" CONC DRIVE APPROACH)</i>	1296	SY		

TOTAL ALTERNATE BASE BID:

The Bidder acknowledges that all notes shown on the plan drawings regarding parking lot light poles, signage, entrance and exit signs, planters, flagpoles, sculptures, and similar features are incidental to the Project. The Contractor shall be solely responsible for coordinating with property owners and for all associated design, structural calculations, shop drawings, and related work required for such relocations. All costs associated shall be borne by the Contractor.

_____. Signature

 Date

W. 76 COUNTRY BLVD. STREETSCAPE - SEGMENTS 1 & 2 - EN7622
BID FORM - BASE BID

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
1	MOBILIZATION	1	LS		
2	CONTRACTOR SUPPLIED TESTING - QUALITY CONTROL	1	LS		
3	CONTRACTOR SUPPLIED SURVEY STAKING	1	LS		
	REMOVALS				
4	REMOVALS AND DISPOSAL	1	LS		
	TRAFFIC CONTROL				
5	CHANGEABLE MESSAGE BOARDS	8	EA		
6	SHOULDER CLOSURES - PHASING	1	LS		
7	LANE CLOSURES - PHASING	1	LS		
8	SW CLOSURES - PHASING	1	LS		
9	SINGLE LANE FLAGGER CONTROL - PHASING	1	LS		
10	CENTER LANE CLOSURE - PHASING	1	LS		
11	CONSTRUCTION SIGNS	895	SF		
12	FLASHING ARROW PANEL	2	EA		
13	TYPE III MOVEABLE BARRICADE (SW)	10	EA		
14	CHANNELIZER (TRIM LINE)	453	EA		
15	SW TEMP CONSTRUCTION FENCING	1200	LF		
16	TEMP ACRYLIC WATRBORN 4" YELLOW PVMT MARKING	23071	LF		
	STORM SYSTEM IMPROVEMENTS				
17	CURB - DROP INLET REPLACEMENT 4X4	2	EA		
18	GRATE INLET (2'X3')	21	EA		
19	NEW GRATE DROP INLET (24"X24")	2	EA		
20	NEW JUNCTION BOX (4X4)	2	EA		
21	CONVERT EX INLETS TO JB'S	3	EA		
22	ADJUST MANHOLE RIM TO FINISH GRADE	4	EA		
23	CONCRETE HEADWALLS	3	CY		
24	CONCRETE FLUME W/GRATE	3	CY		
25	18" RCP FLARED END SECTION	0	EA		
26	24" RCP FLARED END SECTION	1	LF		
27	24" RCP STORM SEWER PIPE	3	LF		

W. 76 COUNTRY BLVD. STREETSCAPE - SEGMENTS 1 & 2 - EN7622
BID FORM - BASE BID

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
28	18" RCP STORM SEWER PIPE	36	LF		
29	15" RCP STORM SEWER PIPE	169	LF		
30	12" STORM SEWER PIPE	640	LF		
31	NEW GRATE INLET (4X4)	4	EA		
	SEDIMENT AND EROSION CONTROL				
32	SILT SOXX	4288	LF		
33	INLET GRAVEL BAGS	70	EA		
34	TEMPORARY GRAVEL ENT	4	EA		
35	CONCRETE WASHOUT	3	EA		
36	TEMPORARY SEEDING	1.50	AC		
37	TRM	6	SY		
38	CHANNEL CHECKS	4	EA		
	WATER SYSTEM IMPROVEMENTS				
39	6" FIRE HYDRANT ASSEMBLIES (TEE, VALVE & HYD)	32	EA		
40	COMMERCIAL FIRE LINE CONNECTIONS	3	EA		
41	10" WATERLINE RJ - C900 (NEW)	198	LF		
42	12" WATERLINE RJ - C900 (NEW)	9209	LF		
43	12" WATERLINE RJ 11.25 BEND (NEW)	12	EA		
44	12" WATERLINE RJ 22.50 BEND (NEW)	7	EA		
45	12" WATERLINE RJ 45 BEND (NEW)	18	EA		
46	12" WATERLINE RJ 90 BEND (NEW)	2	EA		
47	12"x6" RJ REDUCER (NEW)	1	EA		
48	12" RJ PLUG (NEW)	1	EA		
49	8" RJ PLUG (NEW)	2	EA		
50	24" STEEL SLEEVE (NEW)	475	LF		
51	4" C900 PVC WATERMAIN (TIE IN)	10	LF		
52	8" C900 PVC WATERMAIN - TIE IN	264	LF		
53	6" C900 PVC WATERMAIN (FIRE CONNECTION EXT)	40	LF		
54	NEW 2" METER, SETTER AND PIT	18	EA		
55	NEW 2" DOUBLE METER, SETTER AND PIT	3	EA		
56	NEW 4" METER ASSEMBLY AND VAULT	1	EA		
57	3/4" METER, SETTER, AND PIT	9	EA		
58	1" METER, SETTER, AND PIT	15	EA		
59	NEW 6" METER IN EXISTING VAULT	1	EA		

W. 76 COUNTRY BLVD. STREETSCAPE - SEGMENTS 1 & 2 - EN7622
BID FORM - BASE BID

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
60	16" RJ BUTTERFLY VALVES	2	EA		
61	12" RJ GATE VALVES	47	EA		
62	10" RJ GATE VALVES	8	EA		
63	8" RJ GATE VALVES	6	EA		
64	4" RJ GATE VALVES	1	EA		
65	ABANDON EXISTING WATER MAINS	1	LS		
66	16"X12" RJ TEE TIE IN CONNECTION	1	EA		
67	12"X12"X4" RJ TEE	1	EA		
68	12"X12"X6" RJ TEE	1	EA		
69	12"X12"X8" RJ TEE	6	EA		
70	12"X12"X10" RJ TEE	8	EA		
71	12"X12"X12" RJ TEE	2	EA		
72	STRADDLE BLOCKS	6	EA		
73	BORE AND JACK 24" STEEL CASING	91	LF		
UTILITY CORRIDOR					
74	TRENCHING - 5' CORRIDOR	8829	LF		
75	TRENCHING - 4' CORRIDOR (NO WATERMAIN)	320	LF		
76	TRENCHING - 8' CORRIDOR (W/NAT GAS)	730	LF		
77	OUT OF CORRIDOR TIE IN TRENCHING (W/SURFACE REST)	351	LF		
78	2" PE CONDUIT - ALTICE - COPPER AND FIBER	14342	LF		
79	2" GREY PE CONDUIT - WRC	20282	LF		
80	3" GREY PVC CONDUIT - WRE (INSTALL ONLY)	6342	LF		
81	3" GREY PVC CONDUIT - WRE	194	LF		
82	3" GREY PVC 90DEG ELBOW/SWEEP - WRE (INSTALL ONLY)	18	EA		
83	3" GREY PVC 90DEG ELBOW/SWEEP - WRE	8	EA		
84	3" GREY PVC 45DEG ELBOW/SWEEP - WRE	22	EA		
85	3" GREY PVC 22 1/2DEG ELBOW/SWEEP - WRE	11	EA		
86	3" GREY PVC11 1/4DEG ELBOW/SWEEP - WRE	1	EA		
87	3" GREY PVC11 1/4DEG ELBOW/SWEEP - WRE (INSTALL ONLY)	18	EA		
88	4" RED PVC CONDUIT - WRE	26592	LF		
89	4" RED PVC EXT. FML ADAPTER - WRE	200	EA		
90	4" RED PVC 22 1/2DEG ELBOW/SWEEP - WRE	24	EA		
91	4" RED PVC 11 1/4 DEG ELBOW/SWEEP - WRE	23	EA		
92	4" GALV 90 DEG ELBOW - WRE	48	EA		
93	4" GALV 45 DEG ELBOW - WRE	52	EA		
94	4" GREY PVC CONDUIT - BS - SHO-ME - ALTICE	42796	LF		

W. 76 COUNTRY BLVD. STREETScape - SEGMENTS 1 & 2 - EN7622
BID FORM - BASE BID

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
95	4" GREY PVC 90DEG ELBOW/SWEEP - BS-SHO-ME - ALTICE	362	EA		
96	4" GREY PVC 45DEG ELBOW/SWEEP - BS-SHO-ME - ALTICE	90	EA		
97	4" GREY PVC 22 1/2DEG ELBOW/SWEEP - BS-SHO-ME - ALTICE	35	EA		
98	4" GREY PVC 11 1/4DEG ELBOW/SWEEP - BS-SHO-ME - ALTICE	56	EA		
99	WRE - 600 AMP 3PH JCT VAULT (INSTALL ONLY)	9	EA		
100	WRE - 200 AMP 3PH JCT VAULT (INSTALL ONLY)	10	EA		
101	WRE - 1PH TRANSFORMER VAULT (INSTALL ONLY)	2	EA		
102	WRE - 3PH TRANSFORMER VAULT (INSTALL ONLY)	1	EA		
103	WRE - FIBER VAULT (INSTALL ONLY)	12	EA		
104	WRE - SWITCHGEAR VAULT (INSTALL ONLY)	2	EA		
105	ALTICE VAULTS	40	EA		
106	ALTICE PEDESTALS	30	EA		
107	ALTICE POWER SUPPLY CONNECTIONS	2	EA		
108	SHO-ME TECH VAULT	10	EA		
109	BRIGHTSPEED HAND HOLE VAULTS	39	EA		
110	BRIGHTSPEED PEDESTALS	39	EA		
111	WRC - VAULTS	26	EA		
112	DUAL 2" WHT PE CONDUIT - LIGHTING	8125	LF		
113	6" PVC CONDUIT - BRANSON	19116	LF		
114	6" PVC 90 DG SWEEPS - BRANSON	200	EA		
115	6" PVC 45 DG SWEEPS - BRANSON	36	EA		
116	6" PVC 22 1/2 DG SWEEPS - BRANSON	14	EA		
117	6" PVC 11 1/4 DG SWEEPS - BRANSON	24	EA		
118	BREAKOUT VAULTS 5X5 - BRANSON	26	EA		
119	BORE AND JACK 20" STEEL CASING - COMM	91	LF		
120	BORE AND JACK 14" STEEL CASING - POWER	91	LF		
LIGHTING					
121	LIGHTING POLE, 30 FT. TYPE AT W/ 20A GFI RECEPTACLE	56	EA		
122	BRACKET ARM, 6 FT	56	EA		
123	LUMINAIRE, LED-A - TYPE IV	56	EA		
124	BASE MOUNTED CONTROL STATION 240 VOLT - 4 CIRCUIT	3	EA		
125	2 IN STEEL, IN TRENCH	21	LF		
126	DUAL CONDUIT, 2.5 IN RIGID, IN TRENCH	38	LF		
127	SINGLE CONDUIT, 2 IN RIGID, IN TRENCH IRRIG & ACCENT	2421	LF		
128	TRENCHING TYPE I	2480	LF		
129	PULL BOX, PREFORMED CLASS 1	6	LF		

W. 76 COUNTRY BLVD. STREETSCAPE - SEGMENTS 1 & 2 - EN7622
BID FORM - BASE BID

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
130	CABLE, 2 AWG 1 CONDUCTOR	64	EA		
131	CABLE, 6 AWG 1 CONDUCTOR	18822	LF		
132	CABLE, 8 AWG 1 CONDUCTOR	44951	LF		
133	POWER SUPPLY ASSEMBLY, TYPE 2, 240/120 VOLT SERVICE	3	EA		
134	POLE BASE, REINFORCED CONCRETE	56	EA		
135	CONTROLLER BASE, REINFORCED CONCRETE	3	EA		
136	ACCENT LIGHTING PULL BOX	13	EA		
137	IRRIGATION POWER PULL BOX	8	EA		
GRADING					
138	LINEAR GRADING ALONG CURBLINE AND WALKWAYS	11066	LF		
139	EMBANKMENT (RETAINING WALLS 1 & 2)	4665	CY		
140	EMBANKMENT STA 158+00 TO 161+00	555	CY		
141	ROADWAY EXCAVATION STA 120+85 TO 126+40	1344	CY		
142	LANDSCAPE EMBANKMENT/BERMING	60	CY		
143	CURB WALL TYPE-S	488	LF		
144	CURB WALL TYPE-A	120	LF		
145	GRADING FOR DRIVE STA 150+60	126	CY		
RETAINING WALLS					
146	REDI -ROCK RETAINING WALL - VERTICAL FACE	4032	SF		
147	SCUPPERS WITH RISERS FROM DRAIN PIPE	9	EA		
148	SCUPPER DRAIN 12"	379	LF		
149	SCUPPER OUTLET AND SPLASH PAD	9	EA		

W. 76 COUNTRY BLVD. STREETSCAPE - SEGMENTS 1 & 2 - EN7622
BID FORM - BASE BID

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
PAVEMENT					
150	ASPHALT MILLING 2"	12297	SY		
151	CONCRETE SIDEWALK, 4 IN. - BROOM FINISHED (TIE IN)	54	SY		
152	CONCRETE SIDEWALK - COLORED IMPRINTED, 6 IN.	6763	SY		
153	CONCRETE SIDEWALK SEALING	8834	SY		
154	CONCRETE SHOULDER - 6"	44	SY		
155	CONCRETE CURB RAMP APPROACH (DRIVE AND ROAD)	98	EA		
156	TRUNCATED DOMES - VANGUARD BLACK	224	SF		
157	TYPE 1 AGGREGATE FOR BASE (4 IN. THICK)	6997	SY		
158	TYPE 1 AGGREGATE FOR BASE (6 IN. THICK)	2085	SY		
159	ASPHALT FULL DEPTH PAVEMENT 11"	2085	SY		
160	ASPH SP125 (2" BITUMINOUS OVERLAY)	12297	SY		
161	CURB AND GUTTER TYPE CG-1	4906	LF		
162	CURB AND GUTTER MODOT TYPE A TO CG-1 TRANSITION	20	LF		
163	5' ASPHALT PAVED SHOULDER REPLACEMENT	422	SY		
DRIVEWAYS					
164	DRIVE SUBGRADE PREPARATION	8059	SY		
165	GRADING FOR GUTTER SWALE ALONG EDGE OF ROAD	3239	LF		
166	GRADING FOR ADA PATH CROSS SLOPE ACROSS DRIVE	1911	LF		
167	6" ASPHALTIC CONC PAVEMENT WITH 6" COMP AGG BASE	2519	SY		
168	8" CONCRETE DRIVEWAY APPROACH PAVEMENT W/AGG BASE	3794	SY		
169	DUAL 6" PVC ANCILLARY SERVICE CONDUITS	2965	LF		
170	MARKERS FOR CONDUIT ENDS	140	EA		
171	TYPE CG-1 CURB AND GUTTER - SPILL AND CATCH	2916	LF		
172	CONC DRIVE SIDEWALK CROSSING COLORED AND IMPRINTED 8'	1263	SY		

W. 76 COUNTRY BLVD. STREETSCAPE - SEGMENTS 1 & 2 - EN7622
BID FORM - BASE BID

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
STRIPING AND SIGNING					
173	THERMO PLASTIC STOP BARS - WT 24"	121	LF		
174	THERMO PLASTIC YIELD MARKERS - WT	14	LF		
175	THERMO PLASTIC 6" BROKEN STRIPE YELLOW	8730	LF		
176	THERMO PLASTIC 6" SOLID STRIPE YELLOW	9264	LF		
177	THERMOPLASTIC 6" CROSS WALK STRIPES	1083	LF		
178	THERMOPLASTIC LT ARROWS	34	EA		
179	2" STEEL SIGN POSTS	51	EA		
180	POST MOUNTED SIGNS W/MOUNTING BRACKETS	245	SF		
181	PAINTED 4" SOLID WHITE - PARKING LOT	316	LF		
182	PAINTED 4" SOLID BLUE - PARKING LOT	36	LF		
183	PAINTED HANDICAP LOADING ZONE - PARKING LOT	2	EA		
184	PAINTED HANDICAP SYMBOL - PARKING LOT	3	EA		
185	THERMO PLASTIC 12" DOTTED STRIPE WHITE	131	LF		
186	THERMOPLASTIC - DIAGONAL CHEVRONS WT 24"	90	SF		
LANDSCAPE ARCHITECTURAL ELEMENTS					
Specialty Pavement - Entertainment Plaza Only					
187	PIANO KEY SIDEWALK - BOMANITE MICRO-TOP XT	2178	SF		
188	FLAGSTONE PAVERS	2283	SF		
189	PAVE EDGE	50	LF		
190	SYNTHETIC TURF	2499	SF		
191	4" MODOT TYPE 5 AGGREGATE BASE (SPECIALTY PAVEMENT)	532	SY		
Landscape					
192	CONCRETE RIBBON CURB (9" W X 18" H)	1361	LF		
193	ALUMINUM LANDSCAPE EDGING	1177	LF		
194	SOD	11312	SY		
195	DECIDUOUS TREE (2.5" CAL. B&B)	36	EA		
196	ORNAMENTAL TREES (1.5" CAL.)	7	EA		
197	#5 CONTAINER PLANTINGS (LARGE SHRUBS)	19	EA		
198	#3 CONTAINER PLANTINGS (SHRUBS)	1472	EA		
199	#1 CONTAINER PLANTINGS (GRASSES & PERNNIALS)	9624	EA		
200	QUART CONTAINER PLANTINGS (SEDGES)	9624	EA		
201	DAFFODIL PLANTINGS	3556	EA		
202	NATURAL STONE LANDSCAPE BOULDER (5FT - 6FT)	82	EA		
203	NATURAL STONE LANDSCAPE BOULDER (3FT - 4FT)	61	EA		
204	OZARK DRY CREEK BED (6"-12" DECORATIVE COBBLE)	760	SF		
205	OZARK DRY CREEK BED (3" - 6" DECORATIVE COBBLE)	2091	SF		

W. 76 COUNTRY BLVD. STREETSCAPE - SEGMENTS 1 & 2 - EN7622
BID FORM - BASE BID

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
206	OZARK DRY CREEK BED (1"-2" DECORATIVE COBBLE)	835	SF		
207	DECORATIVE ROCK MULCH (2" - 3" OZARK RIVER ROCK)	3771	SF		
208	GEOTEXTILE FABRIC	5862	SF		
209	PLANTING SOIL (RAISED PLANTERS)	83	CY		
210	IMPORTED TOPSOIL (6" DEPTH IN ALL LANDSCAPE AREAS)	3078	CY		
Site Features					
211	NATURAL STONE VENEER WALL (54" HEIGHT)	1098	SFF		
212	WEATHERED STEEL PLANTER WALL WITH LIGHTING TYPE A (HEI	1060	LF		
213	WEATHERED STEEL PLANTER WALL WITH LIGHTING TYPE B (HEI	278	LF		
214	WEATHERED STEEL PLANTER WALL BENCH	8	EA		
215	PARKING LOT BARRIER SCREEN	320	LF		
216	PEDESTRIAN GUARDRAIL	512	LF		
217	CONCRETE AND SYNTHETIC TURF WAVY WALK	1	LS		
218	MUSIC NOTE SCULPTURE ALLOWANCE	1	LS		
219	PERCUSSION PLAY COLOSSUS CHIMES	1	LS		
220	PERCUSSION PLAY DJEMBE DRUMS	1	LS		
221	PERCUSSION PLAY PAPILO BELL	1	LS		
222	GFRC BOULDERS (AT TOY MUSEUM)	1	LS		
223	GATEWAY AND RIBBON SCULPTURES ALLOWANCE	1	LS		
Site Furnishings					
224	6 FT BENCH (FORMS & SURFACES 'CAMBER')	16	EA		
225	LOUNGE CHAIR (MAGLIN '720')	11	EA		
226	BIKE RACK	10	EA		
227	CUSTOM PORCH SWING	1	LS		
228	TABLE (VESTRE 'STRIPES')	2	EA		

W. 76 COUNTRY BLVD. STREETSCAPE - SEGMENTS 1 & 2 - EN7622
BID FORM - BASE BID

<u>Item No</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Extension</u>
Landscape Irrigation System Elements					
229	IRRIGATION SYSTEM INSTALLED IN PLACE	1	LS	_____	_____
				TOTAL BASE BID:	_____

BID FORM - ALTERNATE BID

147 a	DELETE ITEM 147 - CONCRETE SIDEWALK - COLORED IMPRINTED 6 IN FROM BID	-6763	SY	-	_____	_____
147 b	STD 6' CONCRETE BROOM FINISHED SIDEWALK IN LEIU OF COLORED AND IMPRINTED CONCRETE PAVEMENT.	6763	SY		_____	_____
167a	DELETE CONC DRIVE SIDEWALK CROSSING COLORED AND IMPRINTED 8"	-1263	SY	-	_____	_____
163b	ADD QUANTITY 8" CONCRETE DRIVEWAY APPROACH PAVEMENT W/AGG BASE	1263	SY		_____	_____
(REVISED TOTAL QUANTITY 8" CONC DRIVE APPROACH)		5057	SY		_____	_____
				TOTAL ALTERNATE BASE BID:	_____	

The Bidder acknowledges that all notes shown on the plan drawings regarding parking lot light poles, signage, entrance and exit signs, planters, flagpoles, sculptures, and similar features are incidental to the Project. The Contractor shall be solely responsible for coordinating with property owners and for all associated design, structural calculations, shop drawings, and related work required for such relocations. All costs associated shall be borne by the Contractor.

Signature

Date