

EDGE OF PAVEMENT

CENTERLINE OF ROADWAY

EDGE OF TRAVELED WAY
(4" SOLID WHITE LINE)

EDGE OF PAVEMENT

EDGE OF SHOULDER

6" TYPE M (MOUNTABLE) CURB WITH
2' WIDE STRIP OF PAVER STONES


4" SOLID WHITE

4" DOUBLE SOLID YELLOW

6" TYPE M (MOUNTABLE) CURB WITH
2' WIDE STRIP OF PAVER STONES

4" SOLID WHITE

1




R1-2
YIELD
48" x 48"

2




R3-2
NO LEFT TURN
24" x 24"

3




R4-7
KEEP RIGHT
24" x 30"

4

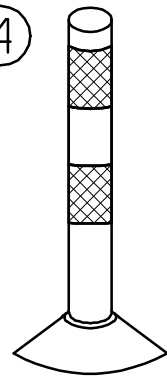

18" FLEXIBLE
DELINEATOR

5



REFLECTIVE RAISED
PAVEMENT MARKER
(STIMSONITE MODEL 88)

24'

5'

16'

10'

5:1 (TYP)

2

3

5

NOTES:

1. ALL SIGNS TO BE MOUNTED ON PERFORATED SQUARE STEEL TUBE POST - STANDARD DRAWING 903.03.
2. SIGN HEIGHT TO BE 7' FROM BOTTOM OF SIGN TO EDGE OF PAVEMENT ELEVATION.
3. FLEXIBLE DELINEATORS TO BE LOCATED AT RADIUS POINTS.
4. REFLECTIVE MARKERS TO BE LOCATED ONE AT THE CENTER OF ISLAND NOSE. THEN 2' SPACING ON EITHER SIDE.
5. DRAWING NOT TO SCALE. FOLLOW DIMENSIONS.

STANDARD DETAILS
RIGHT IN/RIGHT OUT
ISLAND
(without a right turn lane)