

-Angle 3 $1/2 \times 5 \times 1/2$

Girder

Angle 3 1/2 \ 5/16 x 6" long(See Detail "B") %

Angle 3 $1/2 \times 3 1/2 \times$

Ø Machine bolt at about 18" cts. with hardwood spacer block. Cut machine bolt flush with angles after concrete in last pour has taken initial set. (Typ.)


€ 9/16" Ø Holes for 1/2" Ø


machine bolts

PART PLAN

DETAIL "A"

-5/16" Plate (**See Detail "B")**

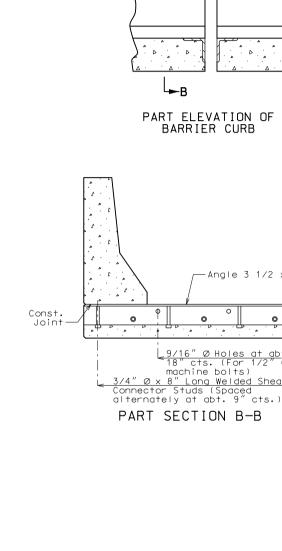

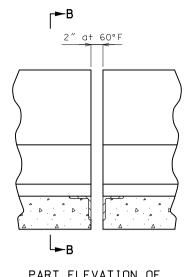

PART ELEVATION OF BARRIER CURB

STANDARD DRAWING GUIDANCE (do not show on plans):

GENERAL NOTES:

grade of the roadway.

installation.

from overspray.

internal vibration.

Expansion joint system shall be fabricated in one section, except for stage construction and when the length is over 50

feet. A complete joint penetration groove welded splice shall be required. Welds shall be ground flush to provide a smooth surface. The expansion joint system shall be fabricated and installed to the crown and

Plan dimensions are based on installation at 60°F. The expansion gap and other dimension shall be increased or decreased ______ for each 10° fall or rise in temperature at

Structural steel for the expansion joint system shall be ASTM A709 Grade 36. Anchors for the expansion joint system shall be in accordance with Sec 1037. Silicone Expansion

Joint Sealant Systems shall be in accordance with Sec 717.

Structural steel for the expansion joint system shall be coated with a minimum of two coats of inorganic zinc primer (5 mils

minimum) or galvanized in accordance with ASTM A123. Anchors need not be protected


Concrete shall be forced under armor angle and around anchors. Proper consolidation of the concrete shall be achieved by localized

Longitudinal reinforcing steel shall be placed so that ends shall not be more than

±1" from vertical leg of angle at the expansion joint system.

For slab thickness < 8 1/2", check shear connector stud length for clearance to flange or diaphragm and adjust length as necessary. See Structural Project Manager.

① Installation gap temperature adjustment normal to the joint.

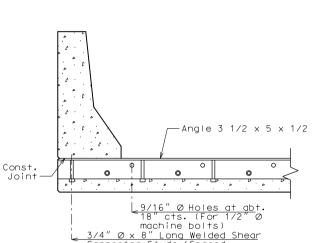

DETAILS OF SILICONE EXPANSION JOINT SEALANT SYSTEM AT END BENT NO.

-@ 9/16" x 1" Slotted Holes for 1/2" Ø

machine bolts

Checked

Fill Face of

End Bent- $3/4'' \otimes \times 8'' \text{Long_Welded}$

Shear Connector Studs

alternately spaced at about 9" cts.

(Typ.)-

Note: This drawing is not to scale. Follow dimensions.

DETAIL "B"

-Angle 3 1/2 x 3 1/2 x 5/16 x 6" long

Sheet No.

THIS MEDIA SHOULD NOT BE CONSIDERED A CERTIFIED DOCUMENT.

9/21/2017 ROUTE

* MΩ SHEET NO BR *

* JOB NO. * CONTRACT ID.

PROJECT NO.

BRIDGE NO.

SISEJS03