

ADDENDUM NO. 01

ISSUED BY: Great River Engineering
2826 S. Ingram Mill Road
Springfield, Missouri 65804
(417) 886-7171
(417) 886-7591 – FAX

DATE: October 5, 2026

FOR PROJECT: City of Shelbina Hwy 15/S. Center Street Sidewalk Improvements TAP-9901(304)
GRE: 4898

This Addendum is applicable to work herein and shall be understood to be and is an Addendum, and as such shall be a part and included in the Contract. IT IS ESSENTIAL THAT ALL BIDDERS, CONTRACTORS, SUBCONTRACTORS, AND ALL MATERIAL SUPPLIERS READ ALL SECTIONS OF THIS ADDENDUM.

Bidding Documents Book:

Itemized Bid Form:

- Updated Line Item 3 Channelizers Unit to EA
- Updated Line Item 20 Pedestrian Guardrail Qty. to 237 LF.

Clarifications:

Pedestrian Guardrail Material & Finish:


HANDRAIL FINISH TO BE HOT-DIPPED GALVANIZED & DE-BURRED STEEL.

Railing & Post Specifications: Table CONFIRMED.

END OF ADDENDUM NO. 01

ATTACHMENTS:

Revised City of Shelbina Hwy 15/S. Center Street Sidewalk Improvements TAP-9901(304) – Itemized Bid Form

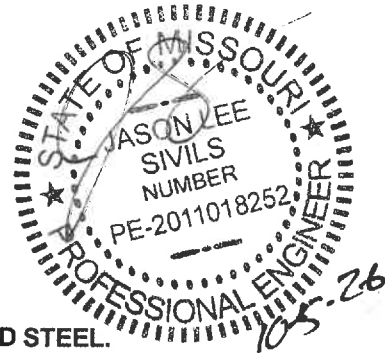



MO HWY 15/S. CENTER STREET SIDEWALK IMPROVEMENTS
TAP-9901(304)
GRE #4898

BID FORM

LINE DESCRIPTION	UNITS	QUANTITY	UNIT PRICE	AMOUNT
BID ITEMS				
1 MOBILIZATION	LS	1		
2 SILT SOCK	LF	300		
3 CHANNELIZERS	EA	50		
4 CONSTRUCTION SIGNS	EA	25		
5 ADA MOVEABLE BARRICADE	EA	6		
6 CONCRETE SIDEWALK REMOVAL	SY	1,690		
7 REMOVAL OF IMPROVEMENTS	LS	1		
8 SIGN RELOCATION	EA	2		
9 SAWCUT	LF	770		
10 LINEAR GRADING CLASS 1	STA	38		
11 4" CONCRETE SIDEWALK W/ TYPE 1 AGGREGATE	SY	1,586		
12 4" CONCRETE SIDEWALK W/ TYPE 1 AGGREGATE BASE (4 IN. THICK) WITH RETAINING WALLS	SY	53		
13 6" CONCRETE SIDEWALK (5 FT. WIDE) W/ TYPE 1 AGGREGATE BASE (4 IN. THICK)	SY	303		
14 CONCRETE DRIVEWAY REPAIR	SF	2,535		
15 GRAVEL DRIVEWAY REPAIR	SF	1,194		
16 CONCRETE PAVEMENT REPAIR	SY	44		
17 PEDESTRIAN CROSSING SIGNAL PACKAGE	EA	3		
18 BUS STOP SIGN	EA	1		
19 NEW CONCRETE ADA CURB RAMP	SY	190		
20 PEDESTRIAN GUARDRAIL	LF	237		
21 TRUNCATED DOMES	SF	277		
22 12" CMP	LF	53		
23 15" CMP	LF	72		
24 18" CMP	LF	32		
25 SEEDING & MULCHING	AC	0.11		
26 6" WHITE PERMANENT PAVEMENT MARKING	LF	336		
27 24" WHITE PERMANENT PAVEMENT MARKING	LF	139		
TOTAL				

INCIDENTAL TO CONSTRUCTION: ANY WORK, MATERIAL, LABOR, EQUIPMENT OR REQUIREMENTS SHOWN OR REASONABLY INFERABLE FROM THE DESIGN DOCUMENTS BUT NOT LISTED AS A SEPARATE LINE ITEM ON THE ITEMIZED BID FORM SHALL BE CONSIDERED INCIDENTAL TO CONSTRUCTION. THE COST OF SUCH ITEMS SHALL BE INCLUDED IN THE UNIT PRICE OR LUMP-SUM PRICE OF THE RELATED BID ITEM. NO ADDITIONAL COMPENSATION OR CHANGE IN CONTRACT TIME WILL BE GUARANTEED TO THE CONTRACTOR FOR INCIDENTAL ITEMS.

BIDDER ACKNOWLEDGEMENT: _____ DATE: _____