

DENT COUNTY  
ROUTE 19 OVER  
STANDING ROCK CREEK  
Job No. J5P3420




### PROJECT FACTS

- \* REMOVE AND REPLACE EXISTING BRIDGE OVER STANDING ROCK CREEK
- \* SHIFT ROADWAY TO THE EAST TO IMPROVE ALIGNMENT

### EXISTING BRIDGE FACTS

- \* STEEL THRU-TRUSS BRIDGE CONSTRUCTED IN 1924
- \* 100' SPAN LENGTH
- \* 20' ROADWAY WIDTH

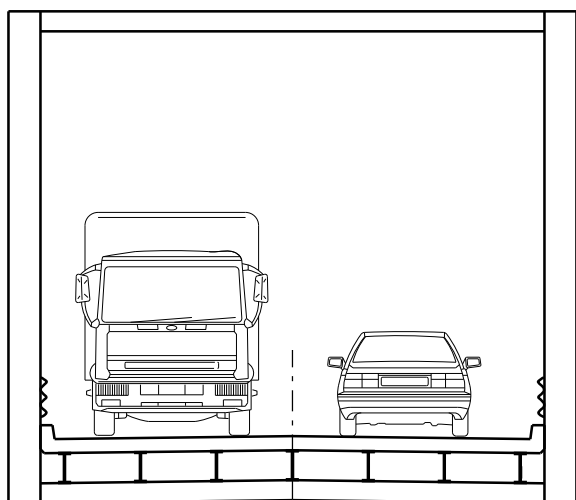


EXISTING BRIDGE SECTION

### TRAFFIC IMPACTS

- \* BRIDGE WILL BE CLOSED DURING CONSTRUCTION
- \* SIGNED DETOUR USING ROUTE K AND ROUTE KK
- \* MAXIMUM CLOSURE PERIOD OF 45 CALENDAR DAYS

### PROPOSED BRIDGE FACTS

- \* PRESTRESSED CONCRETE GIRDER BRIDGE
- \* 110' SPAN LENGTH
- \* 26' ROADWAY WIDTH
- \* CONSTRUCT IN 2024
- \* ESTIMATED TOTAL PROJECT COST = \$1.83M

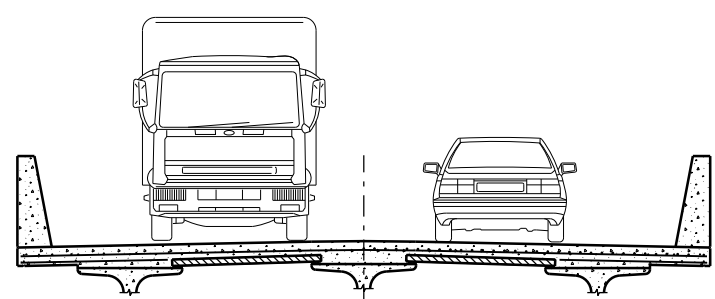

PROPOSED BRIDGE SECTION

For more information: [www.modot.org/central](http://www.modot.org/central)  
573.751.3322 or 1.888.275.6636 (toll-free)  
Facebook: MoDot.Central  
Instagram: @MoDOT\_Central

