

Osage County Route N Roadway and Bridge Improvements over Contrary Creek Job No: J5S3264



Project Facts:

- ◆ Removal and replacement of bridge on Route N over Contrary Creek between US Route 50 and Route J, north of Freedom, MO.
- ◆ Existing bridge deck: 20' width, 129' length
- ◆ Proposed bridge deck: 24' width, 144' 6" length
- ◆ Roadway improvements approximately 235' to the north and 170' to the south of bridge

Bridge Facts:

- ◆ Constructed in 1958
- ◆ Bridge deteriorating; last inspection poor condition

Traffic Impacts:

- ◆ Bridge will be closed during construction
- ◆ Detour will not be signed during closure period
- ◆ Closed up to 2.5 months during construction
- ◆ Alternate routes available during closure


Construction:

- ◆ Construct in 2021

Estimated Total Project Cost:

- ◆ \$650,000


EXISTING BRIDGE TYPICAL SECTION

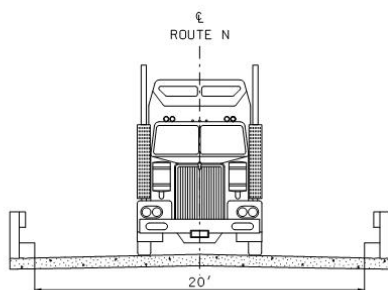

EXISTING BRIDGE FACTS

- ROUTE N - BRIDGE #P0866
- EXISTING BRIDGE WAS CONSTRUCTED IN 1958
 - LENGTH = 129'

PROPOSED BRIDGE TYPICAL SECTION

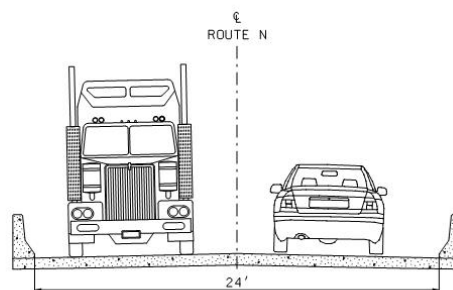

PROPOSED BRIDGE FACTS

- ROUTE N - BRIDGE #A8857
- CONSTRUCTION YEAR 2021
 - LENGTH = 144'-6"

For more information: www.modot.org/central

573.751.3322 or 1.888.275.6636 (toll-free)

Facebook: MoDOT.Central / Instagram: @MoDOT_Central

