

**Quote:****Luby Equipment Services**

2625 N. 24th St.  
Quincy, IL 62305  
800-830-9970

**MoDot**

General Services  
1320 Creek Trail Dr.  
Jefferson City, MO 65102

Date: 7/20/2015

Proposed by: Jerry Jansen

**New unit:** 35 Ton - Item #2  
Eager Beaver 35GSL/S, 2015

- Base trailer
- 35 ton self-lifting detachable lowboy
- Color - black (Dupont Imron)
- Air ride suspension (includes manual height adjust valve with dump)
- 54" axle spread
- Wet line (3000 psi / 6-10 gpm)
- 50" gooseneck height / 86" swing clearance
- 30' flat deck / 8'6" wide / 20" loaded height
- Apitong flooring 1-1/2"
- 6 Roto ring tie downs (5/srail, 1/blstr)
- Extra D-rings (2 base of rear riser; 2 top of riser; 2 flush mount on rear of trunnion)
- Tool box (mounted curbside on gooseneck)
- Standard center; no boomwell
- Flush wheel covers
- Out riggers (on 24" center)
- Standard cross member spacing 18"
- 12" main beams (T-1 steel, 100,000# yield)
- 255/70R22.5 tires on steel wheels
- Hubodometer 255 tire size
- ABS brake system
- Amber strobe lights - tail board
- Flag holders; fixed on rear

\*Delivery in 6 to 8 weeks.

Price:*	\$60,250.00
---------	-------------

**Optional equipment:**

- Gooseneck fenders - add \$1,375.00

**Trade:**

- None

	Trade:	\$0.00
	Difference:	\$60,250.00
0.00%	Tax:	\$0.00
	Total:	\$60,250.00

\*Price does not include Federal excise tax if applicable.

**Warranty:**

- 1 year full machine.

**Quote:****Luby Equipment Services**

2625 N. 24th St.  
 Quincy, IL 62305  
 800-830-9970

**MoDot**

General Services  
 1320 Creek Trail Dr.  
 Jefferson City, MO 65102

Date: 7/20/2015

Proposed by: Jerry Jansen

**New unit:** 50 Ton - Item #3  
 Eager Beaver 50GSL/S, 2015

- Base trailer
- 50 ton self-lifting detachable lowboy
- Color - black (DuPont Imron)
- Air ride suspension (includes manual height adjust valve with dump)
- Lift 3rd axle
- 54" axle spread
- Wet line (3000 psi / 6-10 gpm)
- 50" gooseneck height / 2 king pin mounts 94" & 98" swing/ 4" relief
- Fenders on goose neck
- 24' flat deck / 8'6" wide / 24" loaded height
- Apitong flooring 1-1/2"
- 8 Roto ring tie downs (6/srail, 1/blstr each)
- 36" steel front ramps w/ springs; grouser bars on front slope
- Tool box first section of deck; lockable
- 3 section bucket pocket rear of deck
- Flush wheel covers
- Out riggers (on 24" center); pull out front out riggers
- Standard cross member spacing 24" + 4" stub crossmembers
- 16" main beams (T-1 steel, 100,000# yield)
- 255/70R22.5 tires on steel wheels
- Hubodometer 255 tire size
- ABS brake system
- Amber strobe lights - tail board
- Flag holders; fixed on rear

\*Delivery in 6 to 8 weeks.

Price:*	\$66,250.00
---------	-------------

**Trade:**

- None

	Trade:	\$0.00
	Difference:	\$66,250.00
0.00%	Tax:	\$0.00
	Total:	\$66,250.00

\*Price does not include Federal excise tax if applicable.

**Optional equipment:**

- None

**Warranty:**

- 1 year full machine.

**Quote:****Luby Equipment Services**

2625 N. 24th St.  
Quincy, IL 62305  
800-830-9970

**MoDot**

General Services  
1320 Creek Trail Dr.  
Jefferson City, MO 65102

Date: 7/20/2015

Proposed by: Jerry Jansen

**New unit:** 20 Ton tag - Item #4  
Eager Beaver 20XPT, 2015

- Base trailer
- 20 ton tag with ramps
- Color - black (Dupont Imron)
- Hutch H9700 spring suspension; 50,000 lb. cap.
- 215/75R17.5H tires on steel wheels
- Air brake with ABS system
- 20' deck w/ Oak flooring
- 6' beaver tail; wood filled
- 5 Roto rings (3 srail / 2 btail)
- Pintle hitch on 6'4" tongue length
- Tool box; lockable tongue mount
- 2 speed jack
- 6' wood filled ramps

\*Delivery in 6 to 8 weeks.

Price:*	\$19,650.00
---------	-------------

**Trade:**

- None

	Trade:	\$0.00
	Difference:	\$19,650.00
0.00%	Tax:	\$0.00
	Total:	\$19,650.00

\*Price does not include Federal excise tax if applicable.

**Optional equipment:**

- None

**Warranty:**

- 1 year full machine.

**Quote:****Luby Equipment Services**

2625 N. 24th St.  
Quincy, IL 62305  
800-830-9970

**MoDot**

General Services  
1320 Creek Trail Dr.  
Jefferson City, MO 65102

Date: 7/20/2015

Proposed by: Jerry Jansen

**New unit:** 12 Ton tag - Item #4  
Eager Beaver 12HDB-PT, 2015

- Base trailer
- 12 ton tag with ramps
- Color - black (Dupont Imron)
- Cush spring suspension; Dexter axles
- ST235/80R16E tires on steel wheels
- Air brake with ABS system
- 20' deck w/ Oak flooring
- 6' beaver tail; wood filled
- 5 Roto rings (3 srail / 2 btail)
- Pintle hitch on 6'4" tongue length
- Tool box; lockable tongue mount
- Drop leg jack; 12000 lb rated
- 6' wood filled ramps

\*Delivery in 6 to 8 weeks.

Price:*	\$17,750.00
---------	-------------

**Trade:**

- None

	Trade:	\$0.00
	Difference:	\$17,750.00
0.00%	Tax:	\$0.00
	Total:	\$17,750.00

\*Price does not include Federal excise tax if applicable.


**Optional equipment:**

- None

**Warranty:**

- 1 year full machine.



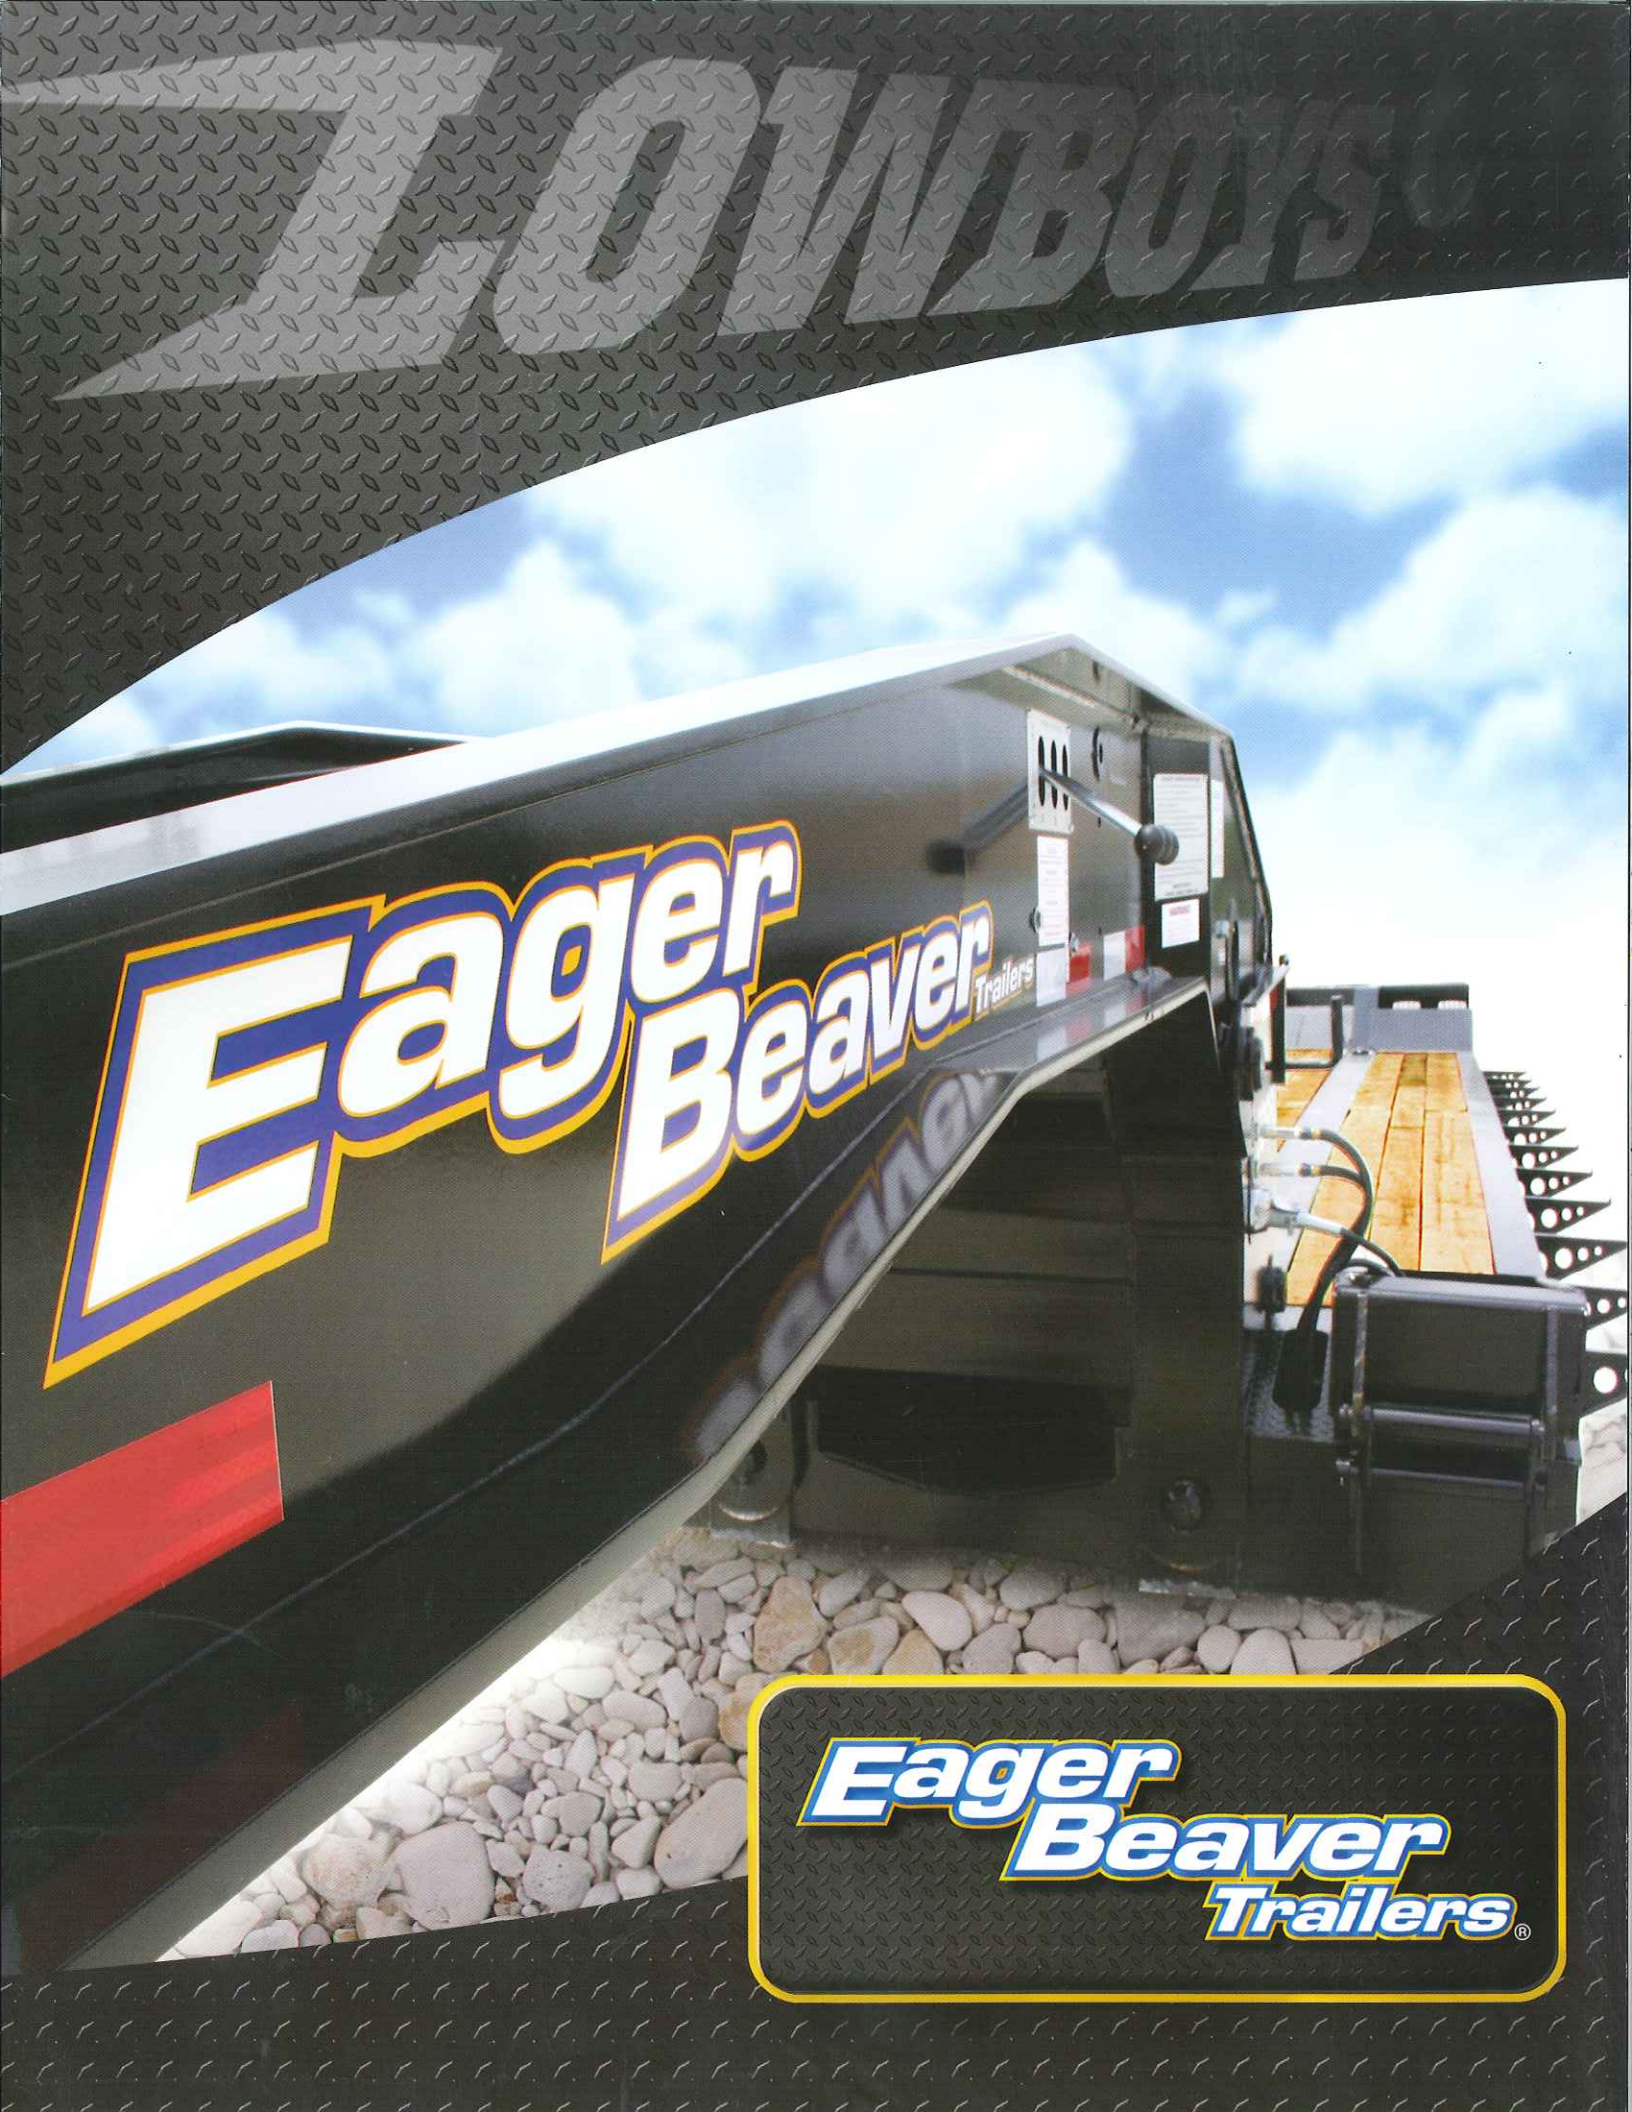

**Eager  
Beaver** Trailers

**Eager  
Beaver**  
Trailers®



# LOWBOYS 25-60 Ton



## 35 GSL/BR

35 Ton Detachable Gooseneck Wetline,  
Dual Axle Single Point Suspension,  
with Beavertail and Ramp  
(Optional Air Ride)

- CAPACITY: 70,000 lbs.
- Trailer Weight: 17,100 lbs
- Overall Width: 102", Length: 44'6"
- Deck Width: 102", Length: 22'
- Height: 24" (Loaded)
- Tires: Eight 255/70R22.5 (H) Radial
- Brakes: Air (Full ABS System)

## PAVER LOWBOY/PT SERIES

## 35 GSL/PT

35 Ton Detachable Gooseneck Wetline,  
Dual Axle Air Ride Suspension, with 4' Rear Riser,  
Wheel Covers, Taper Beam Design


- CAPACITY: 70,000 lbs.
- Trailer Weight: 18,700 lbs
- Overall Width: 102", Length: 44'5"
- Deck Width: 102", Length: 22'
- Height: 24" (Loaded)
- Tires: Eight 255/70R22.5 (H)
- Brakes: Air (Full ABS System)



## 50 GSL/PT

50 Ton Detachable Gooseneck Wetline,  
Tri Axle Air Ride Suspension, with 4' Rear Riser,  
Wheel Covers, Taper Beam Design

- CAPACITY: 100,000 lbs.
- Trailer Weight: 22,700 lbs
- Overall Width: 102", Length: 45'5"
- Deck Width: 102", Length: 24'
- Height: 24" (Loaded)
- Tires: Twelve 255/70R22.5 (H) Radial
- Brakes: Air (Full ABS System)

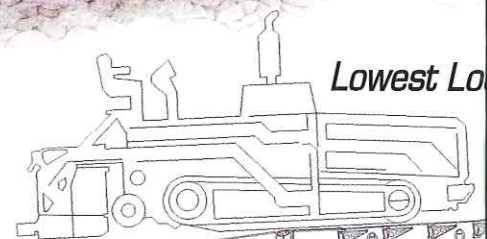



# Hi-Clearance Gooseneck Standard On All


## 50 GSL/BR

50 Ton Detachable Gooseneck,  
Three Axle Air Ride,  
W/Beavertail and Ramp

- CAPACITY: 100,000 lbs.
- Trailer Weight: 22,500 lbs
- Overall Width: 102", Length: 50'11"
- Deck Width: 102", Length: 24'
- Height: 24" (Loaded)
- Tires: Twelve 255/70R22.5 (H) Radial
- Brakes: Air (Full ABS System)

Radial

ading Angle Available

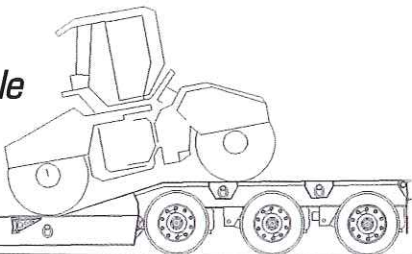





# eck Lowboys...



## Engineered to Exceed Your Demands...

We redesigned the contours of our Gooseneck  
to perform in a greater number of unanticipated circumstances!...  
and made it **Standard on All Models**.

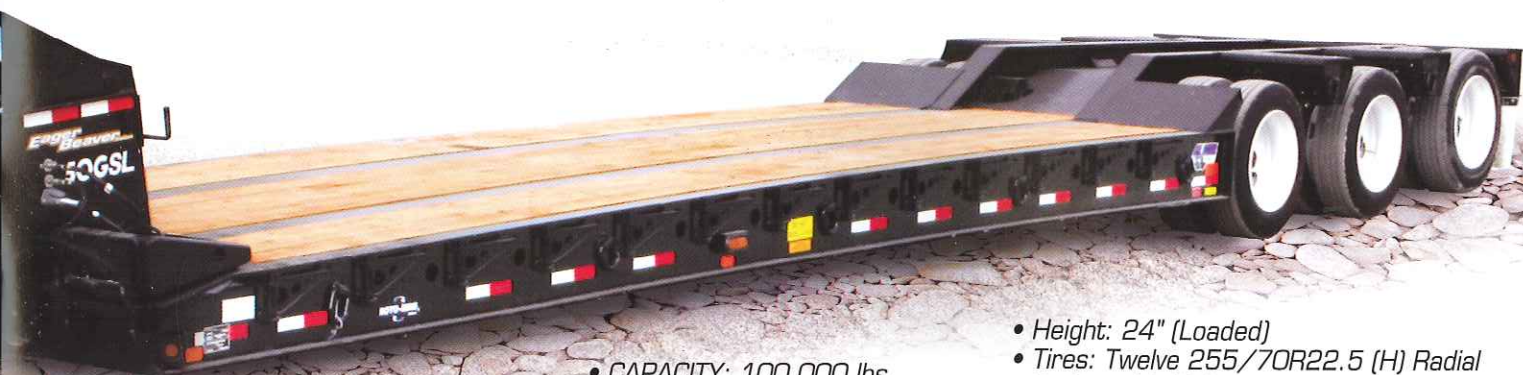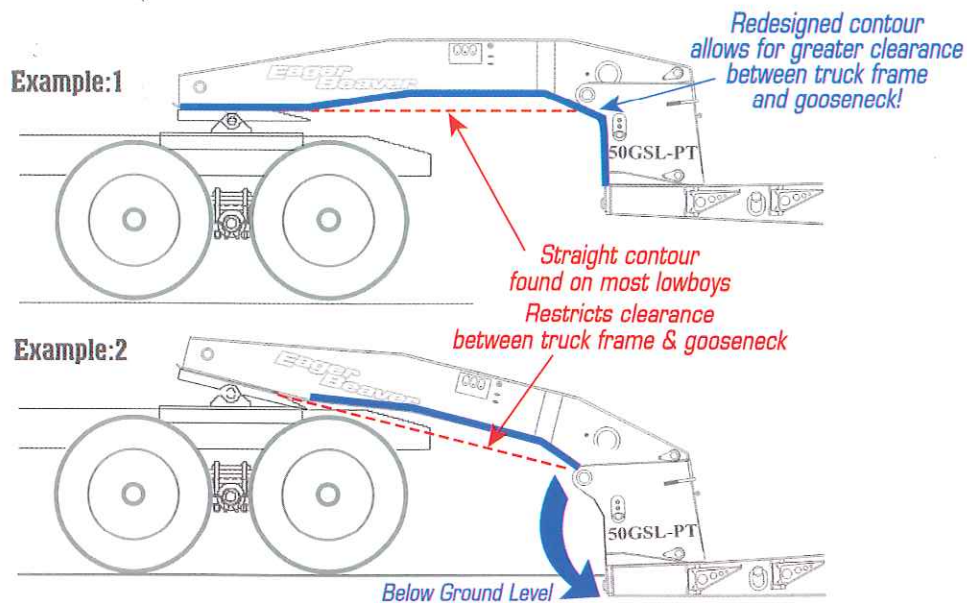

### 50 GSL/3

50 Ton Detachable Three Axle Air Ride

- CAPACITY: 100,000 lbs.
- Trailer Weight: 20,500 lbs.
- Overall Width: 102", Length: 48'6"
- Deck Width: 102", Length: 24'

- Height: 24" (Loaded)
- Tires: Twelve 255/70R22.5 (H) Radial
- Brakes: Air (Full ABS System)



### 55 GSL/3

55 Ton Detachable Gooseneck,  
Tri Axle Air Ride Suspension,  
Stressed for 4th Axle or Booster

- CAPACITY: 110,000 lbs.
- Trailer Weight: 22,650 lbs
- Overall Width: 102", Length: 51'-2"
- Deck Width: 102", Length: 25'
- Height: 24" (Loaded)
- Tires: Twelve 275/70R22.5 (H) Radial
- Brakes: Air (Full ABS System)



# Standard Features On All Lowboys...



Designed to rotate 360° for safer tying down of equipment. The ring always offers maximum strength and security no matter which direction the force is applied. There is less wear on chains, binders and equipment.



**ALL WHEEL ABS**  
(Anti-Lock Brakes)  
with Spring Brakes on all axles.  
• Standard on all Air Brake Trailers.




**L.E.D. LIGHTS**  
**100% Sealed Wiring Harness.**  
USA Harness "PLUS" (positive lock under seal).  
Standard on All Trailers.



**OAK DECK**  
Oak decking is fastened to the crossmembers with bolts and deck washers making it easier to replace decking when required.  
• Standard on All Trailers.



**OUTRIGGERS**  
Outriggers are made of cast steel instead of cast iron making the deck extension stronger and safer.  
• Standard on All Detachable Lowboys.



**SPRING PARKING BRAKES**  
• Standard on All Air Brake Axles.



**HUB PILOTED WHEELS**  
Standard on all trailers.  
Outboard brake drums for easier maintenance.



**AIR LIFT AXLE**  
Quick and easy to operate. Reduces turning radius & tire wear.  
• Standard Equip. on the following models:  
50GSL/3 50GSL/PT  
55GSL/3 60GSL/3



**BEAVERTAIL and SPRING LOADED RAMPS**  
• Standard equipment on  
25 GLB, 35 GLB, 50 GLB,  
35 GSL/BR, 50 GSL/BR



**ALIGNMENT-VEE and FRONT FLIP RAMPS**  
Allows easier Gooseneck attachment and loading of equipment.



**OPTIONAL LOAD BOOSTERS**  
1) Rigid mechanical type (shown) or...  
2) Hydraulic Loading System with nitrogen accumulator.



**STANDARD BOOM WELL and OPTIONAL BUCKET POCKET**



# LOWBOYS 25-60 Ton



## 35 GLB3

35 Ton Fixed Gooseneck - BeaverTail & Ramps  
ABS Air Brake Axles  
Capacity: 70,000 lbs.



## 25 GLB-L

25 Ton Fixed Gooseneck - BeaverTail & Ramps  
ABS Air Brake Axles  
Capacity: 50,000 lbs.



## 35 GSL-S (not shown)

35 Ton Self-Lifting Detachable Lowboy  
ABS Air Brake Axles  
Dual Axle Single Point Suspension  
Capacity: 70,000 lbs.

## 35 GSL-S4S (Economy Model)


35 Ton Self-Lifting Detachable Lowboy  
ABS Air Brake Axles  
4 Spring Tandem Suspension  
Capacity: 70,000 lbs.



## 60 GSL-3


60 Ton Self-Lifting Detachable Lowboy  
ABS Air Brake Axles  
Capacity: 120,000 lbs.

- Shown with optional Pin-On Flip Fourth Axle

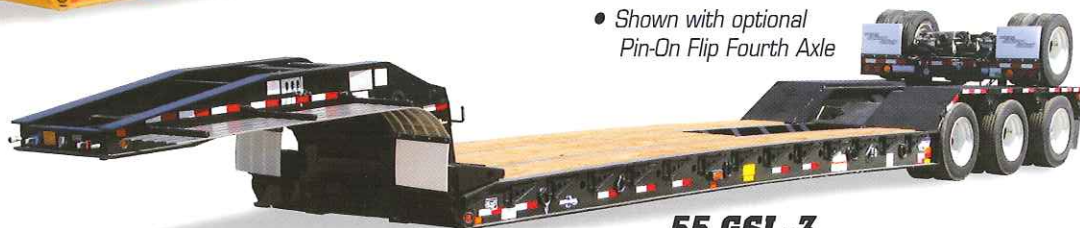

## 55 GSL-3

55 Ton Self-Lifting Detachable Lowboy  
ABS Air Brake Axles  
Capacity: 110,000 lbs.

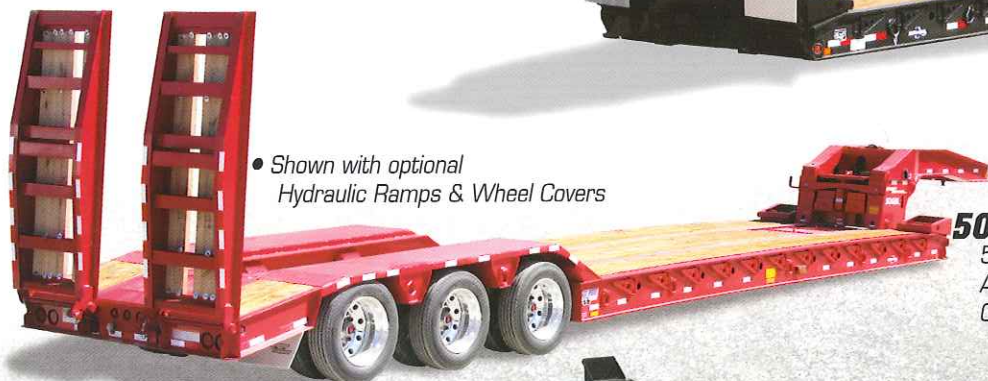

- Shown with optional Hydraulic Ramps & Wheel Covers

## 50 GSL-3

50 Ton Self-Lifting Detachable Lowboy  
ABS Air Brake Axles  
Capacity: 100,000 lbs.



## 60 GLB-5

Capacity: 120,000 lbs.

- 100% Sealed Modular Wiring Harness
- Pierced Crossmembers
- Patented "Roto Rings" Swivel 360°
- Fairlead and Tailboard Roller

**OILFIELD**  
**LOWBOYS**

[EagerBeaverTrailers.com](http://EagerBeaverTrailers.com)

Sales (800) 257-8163

Parts (800) 338-7088


Customer Service (800) 722-8803 ext. 3251

Manufactured by General Engines Company, Inc.



# EASY LOADER

## **Eager Beaver Trailers**

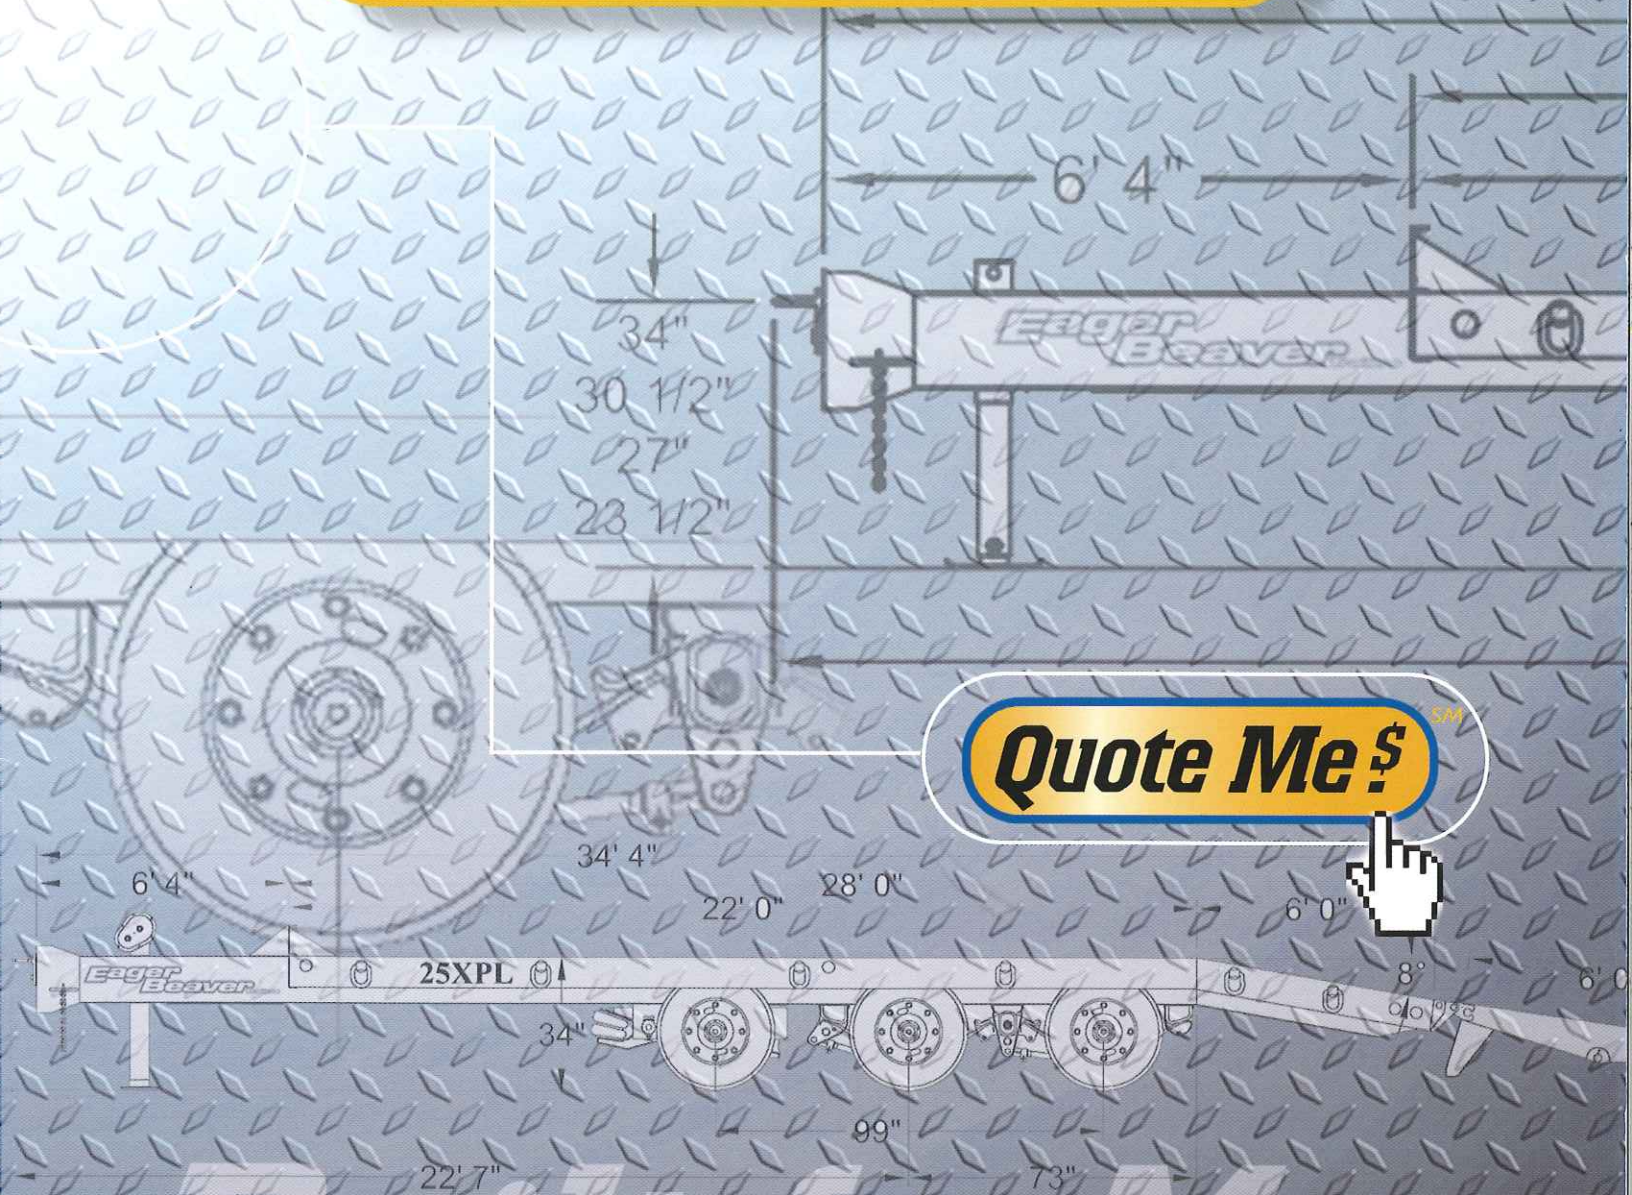

>> [EagerBeaverTrailers.com](http://EagerBeaverTrailers.com)



# EASY LOADER



## 10 HA/PT EASY LOADER

10 Ton Air Brakes, 8 Degree Loading Angle Low Profile

- CAPACITY: 20,000 lbs.
- Trailer Weight: 5,880 lbs.
- Overall Width: 102", Length: 31'4"
- Deck Length: 19' Flat, 6' Beavertail
- Deck Height: 34"
- Tires: Eight 235/85R16 (E)
- Brakes: Air (Full ABS System)



## 12 HDB/PT EASY LOADER

12 Ton Electric Brakes,  
8 Degree Loading Angle Low Profile



## 20XPT EASY LOADER

20 Ton Air Brakes, 8 Degree Loading Angle Low Profile

- CAPACITY: 40,000 lbs.
- Trailer Weight: 8,380 lbs.
- Overall Width: 102", Length: 31'4"
- Deck Length: 19' Flat, 6' Beavertail
- Deck Height: 34"
- Ramps: 72" Long x 22" Wide  
Range: 102" Max. 29" Min.
- Tires: Eight 215/75R17.5 (H)
- Brakes: Air (Full ABS System)

## LIGHT WEIGHT WOOD RAMPS

- EASY LIFTING FROM THE GROUND OR OFF THE BEAVERTAIL
- GRADE 80 HIGH TENSILE STEEL 40% LIGHTER
- DOUBLE ACTING SPRINGS



# 9-25 Ton

## Standard Features On All Easy Load

**New 2008 Model!**

### **EASY-LOADER** with **HYDRAULIC RAMPS**




#### **PUSH BUTTON OPERATION**

- UP - DOWN CONTROLS
- KEY SWITCH (ON/OFF) FOR ANTI-VANDALISM



#### **HYDRAULIC CYLINDERS**

- MAXIMUM GROUND CLEARANCE
- PROTECTED & OUT OF THE WAY



#### **HYDRAULIC COUNTER-BALANCE VALVES**

- LOCKS SYSTEM HYDRAULICLY IN EVENT OF LINE BREAK
- ELIMINATES TRANSPORT LOCK BARS

**LONGER & WIDER RAMPS:** 8' LONG X 3' WIDE RAMPS OFFER THE LOWEST LOADING ANGLE IN THE INDUSTRY  
**VERTICAL STORAGE:** ALLOWS FOR MAXIMUM USE OF DECK SPACE



**Watch Video**  
on our website!



- CAPACITY: 24,000 lbs.
- Trailer Weight: 6,450 lbs.
- Overall Width: 102", Length: 31'4"
- Deck Length: 19' Flat, 6' Beavertail
- Deck Height: 34"
- Tires: Eight 235/85R16 (E)
- Brakes: Electric
- \* Shown with optional ladder ramps



#### **AIR LIFT FRONT AXLE**

#### **COMPAC-TRAC SUSPENSION**

- Ultra Lift Design Requires No Springs
- New Design Gives Maximum Load Capacity
- Manufactured Exclusively for Easy Load

# Built for You



aders...



One Piece Cast Lunette Eye tested @ 275,000# and wrap around nose plate. Standard on all trailers.



All Wheel ABS with Spring Brakes on all axles. Standard on all air brake trailers.



Heavy Duty 2-Speed Parking Jack with 70,000# static capacity. Standard on all 15-25 Ton trailers.




L.E.D. Lights. Standard on all trailers.



High Tensile Main Rail is one piece and cold formed. Standard on all trailers.



Hutch 9700 3-Leaf Suspension. Standard on all 15-25 Ton trailers.



Cross Members pierced through Main Beam for lowest possible deck height and more unitized frame. Standard on all trailers.



Hub Piloted Disc Wheels. Standard on all 15-25 Ton trailers.



100% Sealed Wiring Harness. USA Harness "PLUS" (positive lock under seal). Standard on all trailers.



Lightweight Wood Ramps with double acting springs for lift off ground and off Beaver Tail. Standard on all trailers.



NSION

No Frame Modification  
Maximum Lift And Ground Clearance  
For Eager Beaver Trailers!

## 25XPL EASY LOADER:

25 Ton Capacity Tri-Axle, 8 Degree Loading Angle

- CAPACITY: 50,000 lbs.
- Trailer Weight: 11,720 lbs.
- Overall Width: 102", Length: 34'4"
- Deck Length: 22' Flat, 6' Beavertail
- Deck Height: 34"
- Ramps: 72" Long x 22 1/2" Wide
- \* Shown with optional ladder ramps
- Tires: Twelve 215/75R17.5 (H)
- Brakes: Air (Full ABS System)



# EASY LOADER 9-25 Ton

## TAGALONGS



B6 DOW / 6 Ton Tag - (2) 6K Electric Brake Axles  
12,000 lbs. Capacity  
12 Degree Loading Angle



B9 DOW / 9 Ton Tag - (3) 6K Electric Brake Axles  
18,000 lbs. Capacity  
12 Degree Loading Angle



20 HALX 20 Ton Tag - (2) 20K ABS Air Brake Axles  
40,000 lbs. Capacity  
10 Degree Loading Angle

## EASY LOADERS



10 HDB-PT Easy Loader Series 10 Ton Tag - (2) 10K Electric Brake Axles  
20,000 lbs. Capacity  
8 Degree Loading Angle



12 HA-PT Easy Loader Series 12 Ton Tag - (2) 12K ABS Air Brake Axles  
24,000 lbs. Capacity  
8 Degree Loading Angle



15 HDB-PT Easy Loader Series 15 Ton Tag - (2) 15K Electric Brake Axles  
30,000 lbs. Capacity  
8 Degree Loading Angle



25 XPT Easy Loader Series 25 Ton Tag - (3) 20K ABS Air Brake Axles  
50,000 lbs. Capacity  
8 Degree Loading Angle

# Built for You



**ORDER GENUINE**

**Eager  
Beaver  
PARTS**

**>> EagerBeaverTrailers.com**

***Eager Beaver Trailers® are built  
to help businesses succeed...***

*And, we provide immediate response  
when you need genuine Eager Beaver parts  
to keep your business on schedule.*

- This New facility is home to our Parts & Sales teams.
- Our Brand New 10,000 sq ft parts distribution warehouse is located in Southern New Jersey, less than 1 minute from Interstate 295, Exit 16B.
- We stock nearly 1,500 line items, including everything from hub, brake, suspension, ABS, chassis, hydraulic, and electrical parts to complete axle assemblies. And, we ship worldwide!
- Our New facility has a high tech, high speed data connection to our Lake Wales, Florida plant for both real time data access and 4-digit dialing.

***SAME DAY SHIPMENT / VISA, MC, AMEX accepted***

*Call our Toll Free Parts number,  
or visit your nearest authorized Eager Beaver Trailers  
dealer for the professional service and parts  
support you deserve.*

General Engines Co., Inc., 548 Swedesboro Ave., Mickleton, NJ 08056

**Parts**  
**(800) 338-7088**


**Customer Service**  
**(800) 722-8803**  
ext: 3251

**Sales**  
**(800) 257-8163**



**20 XPT** Easy Loader Series 20 Ton Tag - (2) 20K ABS Air Brake Axles

*Easy Loader Series 20 Ton Tag - (2) 20K ABS Air Brake Axles*

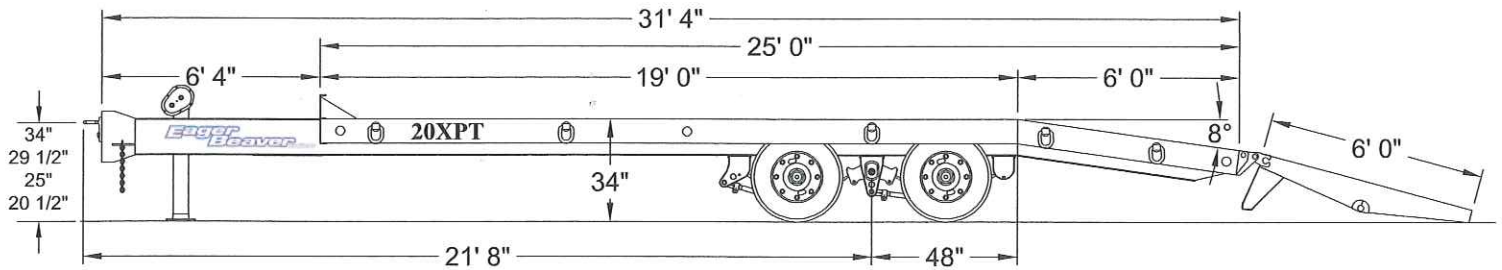

## SPECIFICATIONS

**Capacity:** 40,000 lbs. **Trailer Weight:** 8,380 lbs.

Deck Width	8 ft. 6 in. Length: 19 ft. Height: 34 in.
Frame	Mainrails: W14" x 22 lbs. wide flange I-Beam, one piece cold formed Hi-tensile 50,000 P.S.I. steel mainrails from front to drawbar to rear of trailer 8° Beaver Tail (Safe Low Loading Angle)
Crossmembers	6" x 3.7 lbs. per ft. I-Beam pierced through mainbeam
Decking	Nominal 2" Hardwood
Headboard	8" high, full width of trailer   Drawbar Storage Area
Lights	Sealed L.E.D., 12 volt, DOT approved
Wiring Harness	USA Star PLUS Sealed Modular Wiring Harness w/ 7-Way ATA Plug
Hitch	One piece solid cast steel (adjustable) lunette eye & flange mount
Safety Chains	Two 1/2" Blue-Krome plated high test, safety hook w/ latch
Parking Jack	70,000 lbs. static / 40,000 lbs. lift (Heavy Duty 2-speed screw type)
Tie Down	Five per side - Patented "ROTO RINGS"® Swivel 360°
Colors	Black, Yellow, Blue (standard)

## ***RUNNING GEAR***

Tires	Eight (8) 215/75R 17.5 (H) Steel Belted Radial
Hubs/Wheels	Four Disc Type Hubs, Eight 6.75 x 17.5, 8-Bolt, Hub-Piloted Disc Wheels
Suspension	Hutch H-9700, Three leaf, capacity 50,000 lbs. tandem
Axles	Two 5" diameter 22,500 lbs. each, H.M. series bearings (maximum axle track width)
ALL WHEEL ABS	Anti-Lock Brake System 4S2M Sensor All Wheels Two Modular Valves
Parking Brake	Spring Brake on All Axles

## OPTIONS

Additional Deck Length & Width (20'-21'-22'-23'-24' Optional Lengths) (96" Optional Width) Additional "ROTO-RINGS"®

Tool Box Lid (Lockable)& Optional: Expanded Metal Tray Plate

Spare Tire & Rim 215/75R 17.5 (H) Optional: Spare Tire Carrier

Traction 2" x2" Angle 6" C/C Wheel Paths Optional: Traction Center Section, Bucket Pocket or Plate

Ramps Wood (standard); Ladder (Optional N/C); Electric-Hydraulic 36" Wide x 8' Long

Extension Ramps T-6 Alum. 22" x 75" 8-degree angle (SET)

**Parking Jack**     Optional: Jack mounted on Headboard

Apitong Decking in lieu of Oak


Paint (other than standard Black, Yellow, Blue) Price on Request



Call (800) 257-8163 for more information

# 12 HA/PT

Easy Loader Series 12 Ton Tag - (2) 12K ABS Air Brake Axles

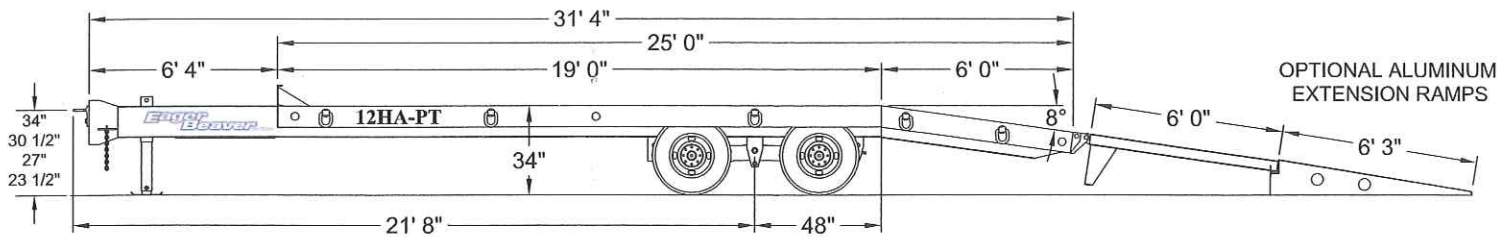

## SPECIFICATIONS

**Capacity:** 24,000 lbs. **Trailer Weight:** 6,530 lbs.

Deck Width	8 ft. 6 in. Length: 19 ft. Height: 34 in.
Frame	Mainrails: W12" x 16 lbs. wide flange I-Beam, one piece cold formed Hi-tensile 50,000 P.S.I. steel mainrails from front to drawbar to rear of trailer 8° Beaver Tail (Safe Low Loading Angle)
Crossmembers	6" x 3.7 lbs. per ft. I-Beam pierced through mainbeam
Decking	Nominal 2" Hardwood
Headboard	8" high, full width of trailer Drawbar Storage Area
Lights	12 volt L.E.D., DOT approved
Wiring Harness	USA Star PLUS Sealed Modular Wiring Harness w/ 7-Way ATA Plug
Hitch	One piece solid cast steel (adjustable) lunette eye & flange mount
Safety Chains	Two 3/8" Blue-Krome plated high test, safety hook w/ latch
Parking Jack	12,000 lbs. static / 10,000 lbs. lift (Heavy Duty drop leg screw type)
Tie Down	Five per side - Patented "ROTO RINGS"® Swivel 360°
Colors	Black, Yellow, Blue (standard)

## RUNNING GEAR

Tires	Eight 235/80R16 (E) Steel Belted Radial
Hubs/Wheels	Four 8 Stud on 6 1/2" BC (2 pc hub & drum), Eight 6.00 x 16 Disc Type Wheels, Oil seals
Suspension	3" wide rubber bushed Slipper Spring w/ equalizer, capacity 24,000 lbs. tandem (Adj. Alignment)
Axles	Two Heavy Duty Dexter, 12,000 lbs. each
Brakes	Dexter 12 1/4" x 5" Air, "S" Cam, Auto Slack Adjusters
ALL WHEEL ABS	Anti-lock brake system 4S2M, Sensors All Wheels, Two modulator valves
Parking Brake	Spring Brakes on All Wheels

## OPTIONS

Additional Deck Length & Width (20'-21'-22'-23'-24' Optional Lengths) Additional "ROTO-RINGS"®  
Tool Box Lid (Lockable) Optional: Expanded Metal Tray Plate  
Spare Tire & Disc Wheel 235/80R16 (E) Optional: Spare Tire Carrier  
Traction 2" x 2" Angle 6" C/C Wheel Paths Optional: Traction Center Section, Bucket Pocket or Plate  
Ramps Ladder (standard) Wood (Optional N/C) Extension Ramps T-6 Alum. 22" x 75" 8° angle (SET)  
Parking Jack Optional: 2-Speed Jack Optional: Jack mounted on Headboard  
Optional: 2-Speed Landing Gear is Available  
Apitong Decking in lieu of Oak  
Paint (other than standard Black, Yellow, Blue) Price on Request

**Eager  
Beaver  
Trailers**

Call (800) 257-8163 for more information



# **Eager Beaver** Trailers

## **Limited Warranty**

Eager Beaver warrants each new vehicle manufactured by us to be free from defects in material and workmanship for a period of 1 year from date of delivery to the original purchaser.

Our obligation under this warranty is to replace free of charge, at our factory or at our dealer's place of business, any part proven defective within the time limit of this warranty.

The Eager Beaver warranty does **not** cover:

1. New products which have been operated in excess of rated capacities.
2. Misuse or accidents
3. Vehicles which have been altered, modified or repaired in any manner not authorized by our company
4. Secondhand or used vehicle. In no way will Eager Beaver be held liable for consequential damages such as rentals of substitute vehicles, loss of profits or other commercial losses.

**Eager Beaver must receive immediate notification of a defect and no allowance will be made for repairs without our consent or approval.**

**This warranty is in lieu of all other warranties, expressed or implied by law or otherwise, and there is no warranty of merchantability or fitness of purpose.**

### **Customer Registration Required By Law**

Federal regulations require motor vehicle manufacturers to maintain a list of original owners of their equipment. Our warranty registration serves this purpose. Please be sure to complete this document. Warranties cannot be processed unless the warranty registration is filed.

### **"REPORTING SAFETY DEFECTS"**

If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration (NHTSA) in addition to notifying General Engines Co., Inc. If NHTSA receives similar complaints, it may open an investigation and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer, or General Engines Co., Inc. To contact NHTSA you may either call the Auto Safety Hotline toll-free at 1-800-424-9393 (or 366-0123 in Washington, D.C. area) or write to: NHTSA, U.S. Department of Transportation, Washington, D.C. 20590. You can also obtain other information about motor safety from the Hotline.

## **Warranty Registration Card**

Business Name \_\_\_\_\_ Phone \_\_\_\_\_ Fax \_\_\_\_\_

Name, Title \_\_\_\_\_

Address \_\_\_\_\_ City, State, Zip \_\_\_\_\_

Date of Purchase \_\_\_\_\_ VIN# \_\_\_\_\_

Dealer Name \_\_\_\_\_ Salesman \_\_\_\_\_ Phone \_\_\_\_\_

Address \_\_\_\_\_ City, State, Zip \_\_\_\_\_





## Warranty Coverage Quick Reference Guide

### General Conditions:

- Warranty is based on normal use and proper maintenance
- Warranty does not cover wearable items or consequential damage at any time
- Component warranties are subject to the original manufacturer warranty beyond the Eager Beaver Trailers 1 year warranty.
- All units must have the warranty registered with Eager Beaver Trailers to receive consideration.
- The customer is responsible for delivery and pick up of the trailer to the assigned service center.
- Authorization is required from Eager Beaver Trailers prior to work commencing. Components may be subject to warranty pending approval. Defective parts must be returned unless otherwise specified. Freight will be reimbursed on approved claims only.

The warranty information in this guide is for trailers manufactured after January 1, 2007. For information on older units please refer to your original warranty registration form or contact Eager Beaver Trailers at 800-722-8803.

### Structural and Factory Warranty

Standard Flat deck and Lowboys

5-year main rail warranty – 100% parts and labor

Other structural warranty pro-rated as follows:

Year 1 – 100% parts and labor

Year 2 – 100% parts

Year 3 – 75% parts

Year 4 – 50% parts

Year 5 – 25% parts

#### Wheel Alignment

- 60 days coverage from in-service date
- Eager Beaver Trailers will pay for mechanical alignment up to \$100.00 per axle if alignment is found incorrect. A before and after spec must be provided to Eager Beaver Trailers
- Tire wear is not covered

#### Tires

- Goodyear
  - Bridgestone
  - Michelin
  - BF Goodrich
  - Uniroyal
- As per manufacturer's warranty

#### Suspension

Air Ride – See attached from Cush for details

#### Wiring Harness and Lights

- 5 year warranty on harness for manufacturer defects
- Lifetime warranty on LED lights for manufacturer defects
- Corrosion is not accepted as warranty

1-year parts and labor on wiring installation due to manufacturing defect

#### Meritor Wabco ABS


- 3 years – 100% parts replacement and labor allowance
- 30 days on wheel sensor alignment (from Eager Beaver Trailers)
- Must have approval from Meritor Wabco authorized technician 1-800-535-5560




# TOWMASTER<sup>®</sup>

COUNT ON IT


**Deck-Over Tilt Air  
T-24TA / T-40TA / T-50TA**

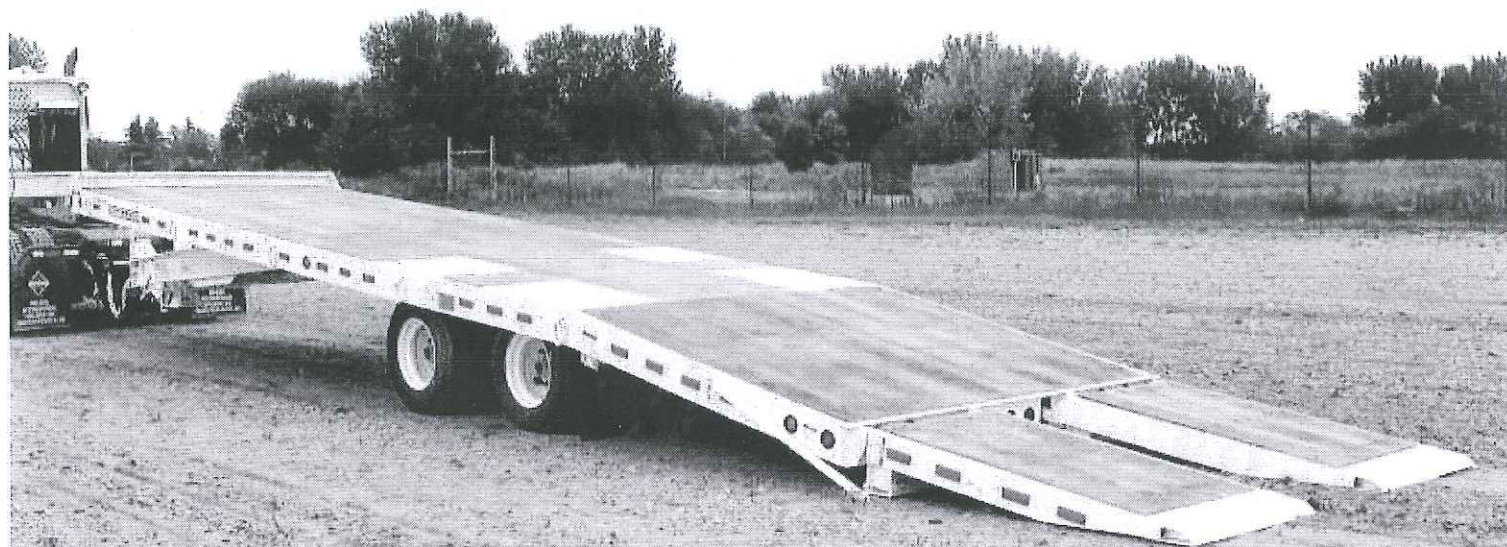

Dual air-bag design uses air from the tow vehicle's system.

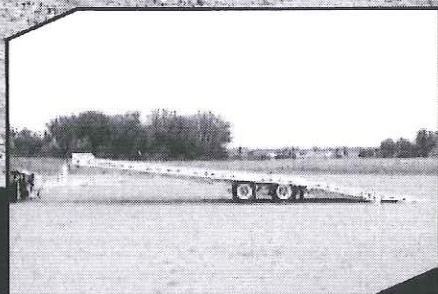

Low incline makes loading and unloading small-wheeled equipment easier.

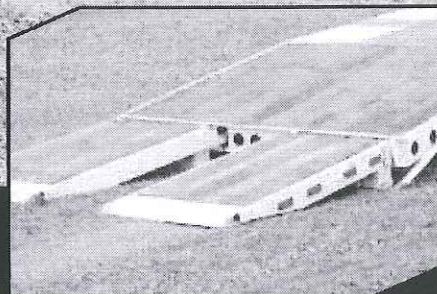

6-foot air ramps provide an easy approach angle.

## Description:

Towmaster's<sup>®</sup> deck-over air-tilt trailers offer convenience and easy loading by tilting the bed using air from the tow vehicle's system. This provides a clean and efficient way of tilting the deck without the use of hydraulics. Ramps can be manual or air-operated. Simply tilt the deck, drive on or off and level the deck back down. The tilt deck trailer features a single-lever twin-latch system to secure the deck to the frame. The low load angle allows for easy equipment loading and unloading.

## Quick Specs:

- 34" deck height (empty)
- 8'-6" deck width
- Dual air bag design
- Air brakes
- Low load angle
- Dual-point, single-lever locking mechanism
- Hutchens adjustable suspension
- LED lights and sealed wiring

[towmaster.com](http://towmaster.com)

**800-462-4517**

**U.S.A. BUILT  
EMPLOYEE OWNED  
AMERICA'S BEST TRAILER**




Photos may show optional equipment.





## T-24TA / T-40TA / T-50TA

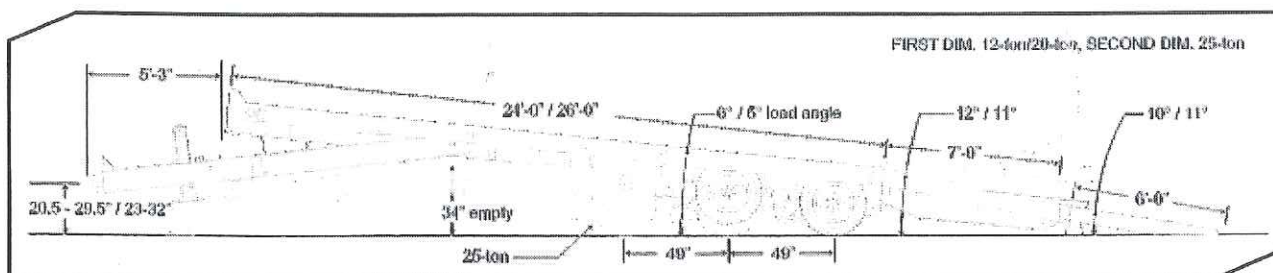

SPECIFICATIONS				
S=Standard O=Optional				
CAPACITY / DIMENSIONS	T-24TA	T-40TA	T-50TA	
Payload Rating (lbs/kg)	24,000 / 10,886	40,000 / 18,143	50,000 / 22,679	
GVWR (lbs/kg)	34,610 / 15,698	52,100 / 23,632	62,600 / 28,394	
GAWR (lbs/kg)	24,000 / 10,886	45,000 / 20,411	54,480 / 24,711	
Approx. Avg. Weight (lbs/kg)	10,610 / 4812	12,100 / 5488	12,600 / 5715	
Overall Length (ft-in/mm)	29-8 / 9042	29-8 / 9042	31-8 / 9652	
Deck Height (empty)(in/mm)	34 / 864	34 / 864	36 / 914	
Overall Width (ft-in/mm)	8-6 / 2591	8-6 / 2591	8-6 / 2591	
TONGUE				
Tongue Length 5'-3" (1600mm)	S	S	S	
Storage Tray with Lid	S	S	S	
Pintle Ring (in)	3	3	3	
High-Tensile Safety Chain	1/2" Grade 70	1/2" Grade 80	5/8" Grade 80	
Bolt-on Two-Speed Parking Jack	25K	25K	25K	
FRAME / RAMPS				
Main Beam	W10x17, Gr.50	W16x26, Gr.50	W16x26, Gr.50	
One-Piece Cold-Formed Frame Rails	S	S	S	
Side Rails (in x in x in)	8x2x3/16 Tubing	8x2x3/16 Tubing	8x2x3/16 Tubing	
Crossmembers	3" Jr I-beam	3" Jr I-beam	3" Jr I-beam	
Headboard Height (in / mm)	5.5 / 140	5.5 / 140	5.5 / 140	
Deck Length (ft/mm)	24 / 7315	24 / 7315	26 / 7924	
Deck Material	2" nom. White Oak	2" nom. White Oak	2" nom. White Oak	
Deck Latch	Dual-Point	Dual-Point	Dual-Point	
Dual Air Bags (deck lift)	S	S	S	
Approach Ramp (in x in/mm)	18 / 457	18 / 457	18 / 457	
Load Angles – ramp, beavertail, deck (degrees)	10 / 12 / 6	10 / 12 / 6	11 / 11 / 5	
D-Ring Tie Downs (Total / Side)	10 / 5	10 / 5	10 / 5	
SUSPENSION / TIRES				
Slipper-spring Suspension	S	N/A	N/A	
Hutchens 9700 suspension	O	S	S	
Axle Capacity (each) (lbs/kg)	12,000 / 5443	22,500 / 10,206	22,500 / 10,206	
Number of Axles	2	2	3	
Axle Spread (in/mm)	49 / 1245	49 / 1245	49 / 1245	
Hubs	Oil Bath	Oil Bath	Oil Bath	
Air Brakes with full ABS	S	S	S	
Brake Size (in/mm)	12.25x5 / 311x127	12.25x7.5 / 311x191	12.25x7.5 / 311x191	
Wheels (in/mm)	16x6 / 406x152	17.5x6.75 / 445x171	17.5x6.75 / 445x171	
Wheel Bolt Pattern	8-bolt	8-bolt	8-bolt	
Tires / Load Range Rating	235/85R16 / E	235/75R17.5 / H	215/75R17.5 / H	

### STANDARD EQUIPMENT

- Adjustable hitch height
- 7-pole round electrical plug
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- Trailer color: Equipment black

### OPTIONAL EQUIPMENT

Other options may be available. Ask your dealer or visit our web site.

- Gooseneck / Rigid Gooseneck
- Stake pockets
- Additional tie-downs
- 12K elec. winch
- Spare tire and wheel mount
- Spare tire and wheel
- Air ramps
- Color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Charcoal
- Galvanizing

### AMERICA'S BEST TRAILER

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

\*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.

Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.

www.towmaster.com


800-462-4517

©Towmaster, Inc. 09/2014




# TOWMASTER<sup>®</sup> COUNT ON IT

5th Wheel  
Detachable Gooseneck  
T-70DTG / T-100DTG / T-110DTG

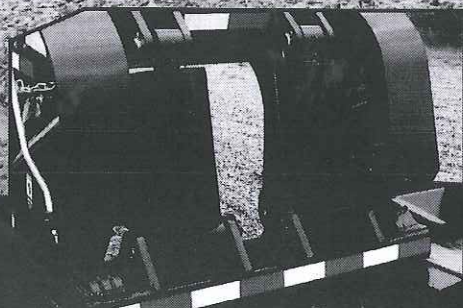

This design incorporates inboard hydraulic cylinders and 5-position load blocks.

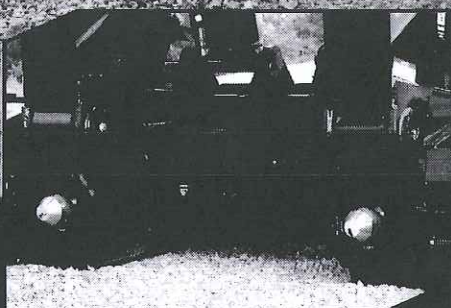

Our 5th-wheel design is quick and easy to use. The gooseneck attaches to the fifth-wheel and locks in place.



Our air lock-pin release makes detaching the gooseneck from the deck a breeze.

## Description:

These Towmaster<sup>®</sup> detachable gooseneck trailers are standard with our exclusive fifth-wheel attachment design. This detachable gooseneck trailer series offers more convenient features to make loading or unloading quick and easy. The fit and finish is unmatched as the entire trailer is pre-painted before assembly and decking for a professional, clean look. Our detachable gooseneck is completely designed and built at our factory, so you can be sure you are getting a genuine quality Towmaster<sup>®</sup> Trailer.

## Quick Specs:

- Variable ride height
- 8'-6" deck width
- T1 steel construction
- Air brakes
- Ridewell<sup>®</sup> suspension
- Outriggers
- Front flip-ramps
- LED lights and sealed wiring

towmaster.com


**800-462-4517**

U.S.A. BUILT  
EMPLOYEE OWNED  
AMERICA'S BEST TRAILER



Photos may show optional equipment.



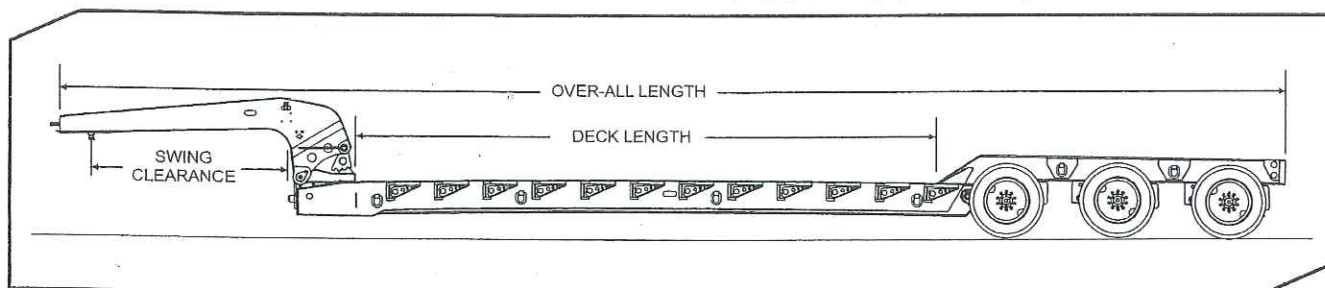

CAPACITY / DIMENSIONS	T-70DTG	T-100DTG	T-110DTG
Capacity Rating (lbs/kg)	70,000 / 31,751	100,000 / 45,359	110,000 / 49,895
Capacity Rating in 16ft (lbs/kg)	70,000 / 31,751	100,000 / 45,359	110,000 / 49,895
Approx. Weight (lbs/kg)	14,500 / 6577	18,300 / 8301	18,700 / 8482
Deck Height (fully loaded)(in/mm)	24 / 610	24 / 610	24 / 610
Deck Length (ft-in/mm)	22-0 / 6706	24-0 / 7315	24-0 / 7315
Overall Width (ft-in/mm)	8-6 / 2591	8-6 / 2591	8-6 / 2591
Overall Length (ft-in/mm)	42-0 / 12,802	48-0 / 14,630	49-10 / 15,189
<b>GOOSENECK</b>			
Length (ft-in/mm)	10-10 / 3302	10-10 / 3302	11-10 / 3607
Swing Clearance (in/mm)	84 / 2134	84 / 2134	96 / 2438
Fifth-Wheel Deck Lock	S	S	S
Air-Pin Deck Lock	O	O	O
Wet Line Hydraulic System	S	S	S
Greaseable Pivot Points	S	S	S
Twin Five-Position Load Blocks	S	S	S
<b>MAIN DECK / REAR TRUNNION</b>			
Main Beam (T1 Flange) (in)	16 Fabricated	16 Fabricated	16 Fabricated
Outside Rails (T1 Flange) (in)	14 Fabricated	14 Fabricated	14 Fabricated
Diamond Cut-outs	O	O	O
Crossmembers (Deep x Flange) (in)	10 x 4	10 x 4	10 x 4
Outside Oak Deck Full 2"	S	S	S
Self-Aligning Locking Fifth-Wheel	S	S	S
Front Flip-up Ramps	S	S	S
Fixed Approach	O	O	O
Swing-out Outriggers	S	S	S
HD Removable Swing-out Outriggers	O	O	O
Tie Downs	Forged D-rings	Forged D-rings	Forged D-rings
Number of Tie-Downs (Total / Side)	10 / 5	12 / 6	12 / 6
Approach Bolster	S	S	S
Supporting Bolsters Between Wheels	S	S	S
Trunnion Open Boom Well	S	S	S
Flip Axle Mount Brackets	O	O	S
Stinger Reinforcement	N/A	O	O
<b>SUSPENSION / TIRES</b>			
Air Suspension	S	S	S
Meritor Axles (number of axles)	S (2)	S (3)	S (3)
Axle Spread (in/mm)	49 / 1245	49 / 1245	55 / 1397
Axle Capacity (each) (lbs/kg)	25,000 / 11,340	25,000 / 11,340	25,000 / 11,340
Forged Alloy Spindles	S	S	S
Oil Bath Hubs	S	S	S
Air Brakes	S	S	S
Brake Size (in/mm)	16.5x7 / 419x178	16.5x7 / 419x178	16.5x7 / 419x178
22.5x8.25 Budd-type Wheels	S	S	S
Wheels Hub Piloted	S	S	S
Wheel Bolt Pattern	10-bolt	10-bolt	10-bolt
Tire Size (all Load Range Rating H)	255/70R x 22.5	255/70R x 22.5	255/70R x 22.5
Poly Mud Flaps	S	S	S

### STANDARD EQUIPMENT

- S.A.E. 2" King Pin set at 16"
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- Trailer color: Equipment black

### OPTIONAL EQUIPMENT

Other options may be available. Ask your dealer or visit our web site.

- Positive Air-Lock gooseneck
- Longer swing-clearance lengths
- Gooseneck fenders
- Self-contained hydraulic unit
- Dual hydraulic system
- Tapered deck
- Additional deck length
- Wide deck
- Bucket plate
- Several ramp options
- Several wheel options
- Booster and Flip-Axle options
- Suspension and brake options
- Color options: Construction Yellow, Equipment Red, Blue, Charcoal

Download PDF



### AMERICA'S BEST TRAILER

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

\*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.

Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.

www.towmaster.com

800-462-4517


©Towmaster, Inc. 09/2013




# TOWMASTER<sup>®</sup>

COUNT ON IT


Deck-Over  
T-40 / T-40LP

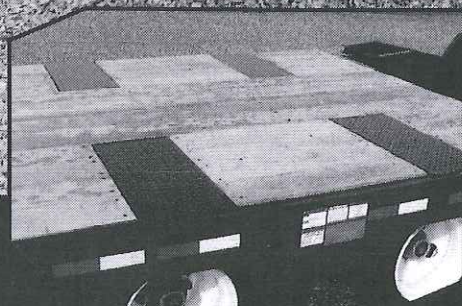

"LP" (Low-Profile) models feature a 10-inch beam, steel over the wheels and a 12-degree beavertail.

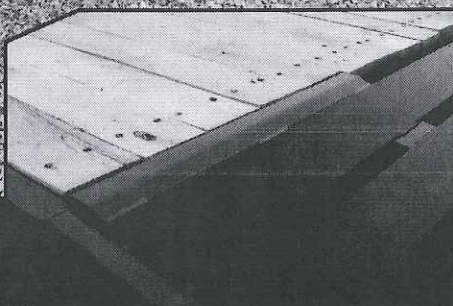

Wood protectors are standard on Towmaster T-series trailers. They protect the end of the deck boards when loading equipment.

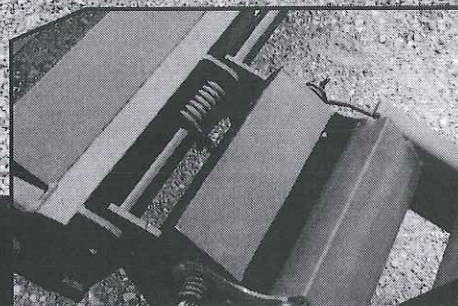

Two-way spring assist ramps allow you to easily lift ramps off deck and also off the ground. Grommet mounted LED lights are standard.

## Description:

These premium Towmaster<sup>®</sup> deck-over trailers are built more durable and more stylish to provide a great looking trailer that will last a long time. They are great for hauling heavy equipment of all types. If you need a lower profile trailer, the T-40LP has a 2-in lower deck and lower loading angle. Two-way spring-assist ramps and wood protectors are standard.

## Quick Specs:

- 36" / 34" deck height (empty)
- 8'-6" deck width
- 20'-0" deck length
- Air brakes with ABS
- Hutchens<sup>®</sup> suspension
- Adjustable hitch
- Two-way spring-assist ramps
- LED lights and sealed wiring

towmaster.com


**800-462-4517**

U.S.A. BUILT  
EMPLOYEE OWNED  
AMERICA'S BEST TRAILER



Photos may show optional equipment.



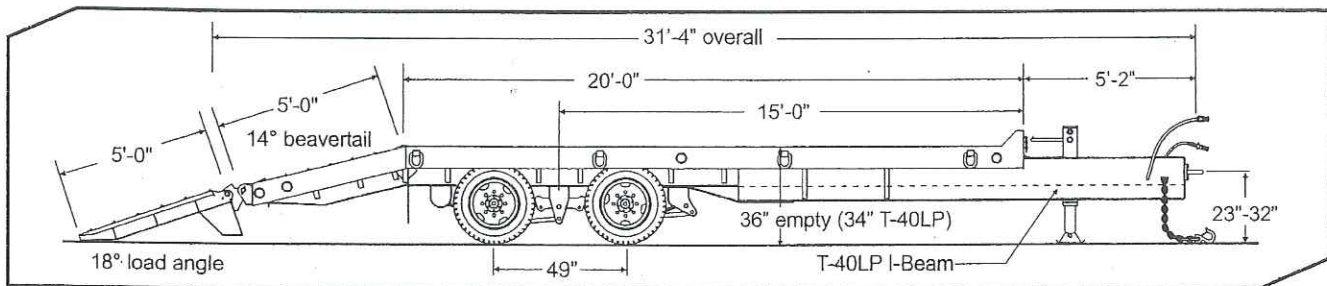

### SPECIFICATIONS

S=Standard O=Optional

CAPACITY / DIMENSIONS	T-40	T-40LP
Capacity Rating (lbs/kg)	40,000 / 18,144	40,000 / 18,144
GVWR (lbs/kg)	48,800 / 22,135	48,600 / 22,045
GAWR (lbs/kg)	45,000 / 20,411	45,000 / 20,411
Approx. Weight (lbs/kg)	8,800 / 3992	8,600 / 3901
Overall Length (ft-in/mm)	31-4 / 9550	31-4 / 9550
Deck Height (empty)(in/mm)	36 / 914	34 / 864
Deck Length (ft-in/mm)	20-0 / 6096	20-0 / 6096
Overall Width (ft-in/mm)	8-6 / 2591	8-6 / 2591
<b>TONGUE</b>		
Tongue Length (ft-in/mm)	5-2 / 1575	5-2 / 1575
Storage Tray with Lid	S	S
Pintle Ring (in)	S	S
High-Tensile Safety Chain (size - in)	1/2 Grade 80	1/2 Grade 80
Bolt-on Two-Speed Parking Jack	25K	25K
<b>FRAME / RAMPS</b>		
Main Beam	W16 x 26, Gr. 50	W10, x 26 Gr. 50
One-Piece Cold-Formed Frame Rails	S	S
Crossmembers	3" Jr I-beam	3" Jr I-beam
Headboard (in/mm)	5.5 / 140	5.5 / 140
Channel Side Rails (in/mm)	8 / 203	8 / 203
Deck Material	2" nom. White Oak	2" nom. White Oak
Wood Protectors	S	S
Forged D-Ring Tie Downs (total/Side)	8 / 4	8 / 4
Beaver tail (ft-in / mm) (angle-degrees)	5-0 / 1524 (14)	5-0 / 1524 (12)
Ramps (ft-in x in/mm)	5-0 x 21 / 1524 x 533	5-0 x 21 / 1524 x 533
Two-Way Spring Assist	S	S
<b>SUSPENSION / TIRES</b>		
Hutchens Spring Suspension	S	S
No. of Axles	2	2
Axle Capacity (each) (lbs/kg)	22,500 / 10,206	22,500 / 10,206
Axle Spread (in/mm)	49 / 1245	49 / 1245
Hubs	Oil Bath	Oil Bath
Brake Size (in/mm)	12.25x7.5 / 311x191	12.25x7.5 / 311x191
Air Brakes (Full ABS Modulated, Park Brake All Axles)	S	S
Hub Piloted Budd-type Wheels (in/mm)	17.5x6.75 / 445x171	17.5x6.75 / 445x171
Wheel Bolt Pattern	8-bolt	8-bolt
Tires / Load Range Rating	235/75R17.5 / H	235/75R17.5 / H

### STANDARD EQUIPMENT

- Adjustable hitch height
- 7-pole round electrical plug
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- Trailer color: Equipment black
- Ramp color: Equipment Red

### OPTIONAL EQUIPMENT Other options may be available. Ask your dealer or visit our web site.

- Dual parking jacks
- Additional deck length
- Additional tie-downs
- Rub rail with stake pockets
- 12K electric winch
- Spare tire and wheel mount
- Spare tire and wheel
- Double-break beaver tail (T-40 only)
- Several beaver tail options
- Color options: Construction Yellow, Equipment Red, Blue, Charcoal
- Galvanizing

Download PDF



### AMERICA'S BEST TRAILER

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

\*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.

Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.

www.towmaster.com

800-462-4517

©Towmaster, Inc. 09/2013



# Towmaster

AMERICA'S BEST TRAILER



## Description:

The premium line of Towmaster® deck-over trailers has proven to offer durability, longevity and style that other brands try to emulate. Our build quality and design creates a trailer that is easy to own and easy to maintain. They are built on our famous I-Beam main frame with a 20-foot deck and self-cleaning angle iron beaver tail. Two-way spring-assist ramps are standard on all Towmaster® T-series deck-over models.

## Quick Specs:

- 36" deck height (empty)
- 8'-6" deck width
- 20' deck length
- Electric or Air brakes (model specific)
- Hutchens® suspension
- Self-cleaning angle-iron beaver tail
- Two-way spring-assist ramps
- LED lights and sealed wiring





Go directly to our web site with your smart phone. Scan this tag with your phone's camera using the app at <http://gettag.mobi>


[towmaster.com](http://towmaster.com)

800-462-4517


U.S.A. BUILT EMPLOYEE OWNED

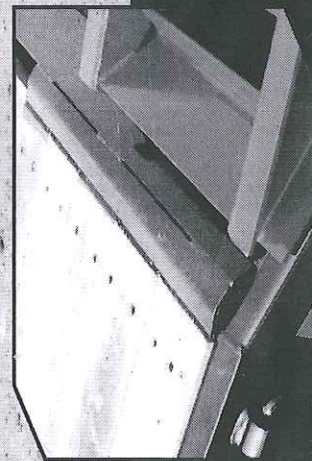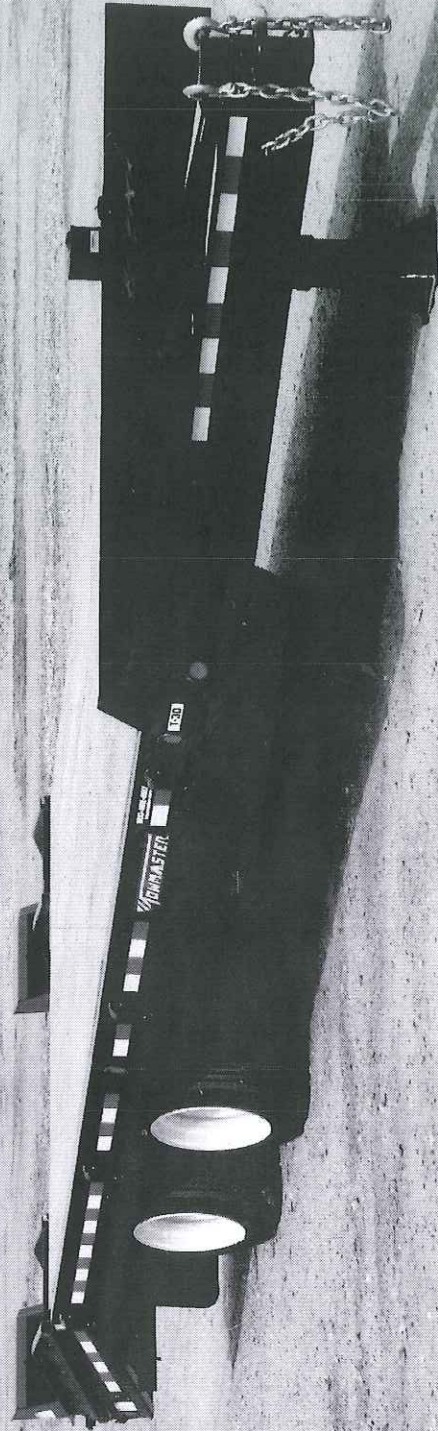

Wood protectors are standard on Towmaster T-series trailers and protect the end of the deck boards.

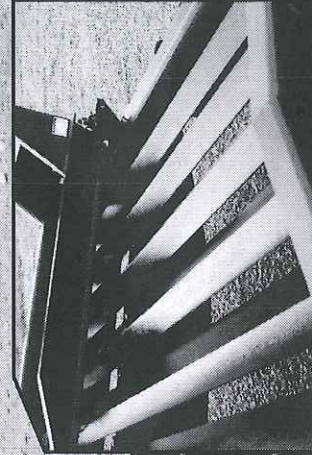

Self-cleaning angle iron beaver tail also provides positive traction when loading equipment.

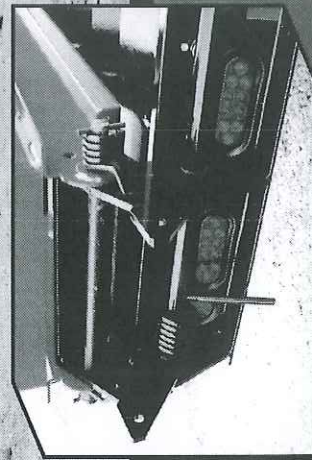

Two-way spring assist ramps allow you to easily lift ramps off deck and also off the ground. Grommet mounted LED lights are standard.



AVAILABLE GALVANIZING




**Deck-Over**  
**T-20 / T-24 / T-30**

Photos may show optional equipment.



# T-20 / T-24 / T-30

## AMERICA'S BEST TRAILER

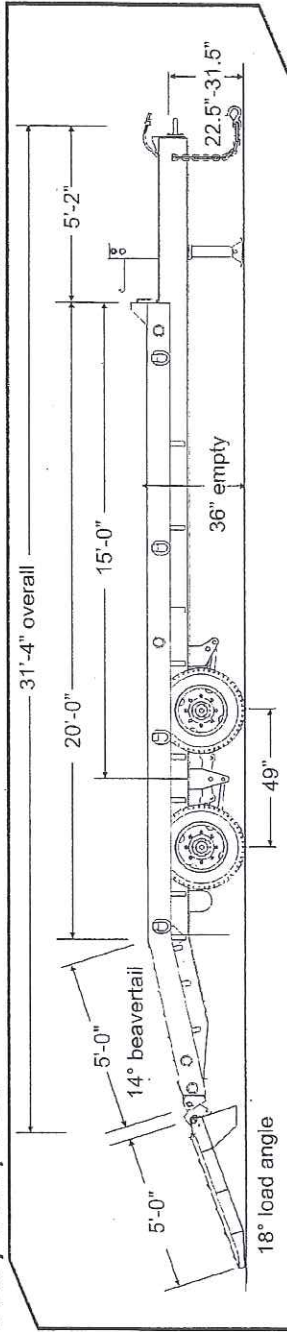

### SPECIFICATIONS

S=Standard O=Optional

CAPACITY / DIMENSIONS	T-20		T-24		T-30	
	Capacity Rating (lbs/kg)	19,000 / 8618	24,000 / 10,866	30,000 / 13,608	30,000 / 13,608	30,000 / 13,608
GAWR (lbs/kg)	25,990 / 11,789	31,000 / 14,061	38,300 / 17,373	38,300 / 17,373	38,300 / 17,373	38,300 / 17,373
GAWR (lbs/kg)	20,000 / 9072	24,000 / 10,866	30,000 / 13,608	30,000 / 13,608	30,000 / 13,608	30,000 / 13,608
Approx. Weight (lbs/kg)	7,000 / 3175	7,000 / 3175	8,300 / 3765	8,300 / 3765	8,300 / 3765	8,300 / 3765
Overall Length (ft-in/mm)	31'-4" / 9550	31'-4" / 9550	31'-4" / 9550	31'-4" / 9550	31'-4" / 9550	31'-4" / 9550
Deck Height (empty) (in/mm)	36" / 914	36" / 914	36" / 914	36" / 914	36" / 914	36" / 914
Deck Length (ft-in/mm)	20'-0" / 6096	20'-0" / 6096	20'-0" / 6096	20'-0" / 6096	20'-0" / 6096	20'-0" / 6096
Overall Width (ft-in/mm)	8'-6" / 2591	8'-6" / 2591	8'-6" / 2591	8'-6" / 2591	8'-6" / 2591	8'-6" / 2591
TONGUE	Tongue Length (ft-in/mm)	5'-2" / 1575	5'-2" / 1575	5'-2" / 1575	5'-2" / 1575	5'-2" / 1575
	Storage Tray with Lid	S	S	S	S	S
FRAME / RAMPS	Pinle Ring (in)	S	S	S	S	S
	High-Tensile Safety Chain (size - in)	3/8 Grade 70	1/2 Grade 70	1/2 Grade 70	1/2 Grade 70	1/2 Grade 70
SUSPENSION / TIRES	Bolt-on Drop-Leg Parking Jack	12K	12K	12K	12K	12K
	Main Beam	W10 x 17, Gr. 50	W10 x 17 Gr. 50	W10 x 26, Gr. 50	W10 x 26, Gr. 50	W10 x 26, Gr. 50
One-Piece Cold-Formed Frame Rails	Crossmembers	3" Jr I-beam	3" Jr I-beam	3" Jr I-beam	3" Jr I-beam	3" Jr I-beam
	Headboard (in/mm)	5.5 / 140	5.5 / 140	5.5 / 140	5.5 / 140	5.5 / 140
Channel Side Rails (in/mm)	Deck Material	8 / 203	8 / 203	8 / 203	8 / 203	8 / 203
	Wood Protectors	2" nom. White Oak	2" nom. White Oak	2" nom. White Oak	2" nom. White Oak	2" nom. White Oak
Forged D-Ring Tie Downs (total/Side)	Beaver Tail (ft-in / mm) (angle-degrees)	5'-0" / 1524 (14)	5'-0" / 1524 (14)	5'-0" / 1524 (14)	5'-0" / 1524 (14)	5'-0" / 1524 (14)
	Ramps (ft-in x in/mm)	5'-0 x 21 / 1524 x 533	5'-0 x 21 / 1524 x 533	5'-0 x 21 / 1524 x 533	5'-0 x 21 / 1524 x 533	5'-0 x 21 / 1524 x 533
Two-Way Spring Assist	Two-Way Spring Assist	S	S	S	S	S
	Hutchens Spring Suspension	S	S	S	S	S
No. of Axles	Axle Capacity (each) (lbs/kg)	10,000 / 4536	12,000 / 5443	15,000 / 6803	15,000 / 6803	15,000 / 6803
	Axle Spread (in/mm)	49" / 1245	49" / 1245	49" / 1245	49" / 1245	49" / 1245
Hubs	Electric Brakes	S	S	S	S	S
	Brake Size (in/mm)	12.25x4 / 311x102	12.25x5 / 311x127	12.25x5 / 311x127	12.25x5 / 311x127	12.25x5 / 311x127
Air Brakes (Full ABS Modulated, Park Brake All Axles)	Hub Piloted Budd-type Wheels (in/mm)	16x6 / 406x152	16x6 / 406x152	16x6 / 406x152	16x6 / 406x152	16x6 / 406x152
	Wheel Bolt Pattern	8-bolt	8-bolt	8-bolt	8-bolt	8-bolt
Tires / Load Range Rating	Tires / Load Range Rating	235/85R x 16 / E	235/85R x 16 / E	235/85R x 16 / E	235/85R x 16 / E	235/85R x 16 / E
	Tires / Load Range Rating	235/85R x 16 / E	235/85R x 16 / E	235/85R x 16 / E	235/85R x 16 / E	235/85R x 16 / E



### STANDARD EQUIPMENT

- Adjustable hitch height
- 7-pole round electrical plug
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- Trailer color: Equipment black
- Ramp color: Equipment Red

### OPTIONAL EQUIPMENT

Other options may be available  
See your dealer or visit our web site for details

- Gooseneck
- 25K two-speed parking jack
- Dual parking jacks
- Additional deck length
- Additional tie-downs
- Rub rail with stake pockets
- 12K electric winch
- Spare tire and wheel mount
- Spare tire and wheel
- Tire upgrade (load range G)
- Double-break beaver tail
- Several beaver tail options
- Color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Charcoal
- Galvanizing



Download these PDF specs to your smart phone. Scan this tag with your phone's camera using the app at <http://gettag.mobi>

www.towmaster.com  
800-462-4517

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

\*Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.

©Towmaster, Inc. 10/2010