



LIMITED WARRANTY

Interstate Trailers, Inc. warrants each new vehicle manufactured by us to be free from defects in material and workmanship under normal use and service for a period of one year from date of delivery to the original purchaser.

Our obligation under this warranty is to replace free of charge, FOB our factories or at our dealers place of business, any part proven defective within the time limit of this warranty. **Interstate Trailers must receive immediate notification of a defect and must give written authorization before any repairs are made.**

Interstate Trailers' warranty does NOT cover: (1) New products which have been operated in excess of rated capacities, (2) Misuse or accidents, (3) Vehicles which have been altered, modified or repaired in any manner not authorized by our company, (4) Second hand or used vehicle. In no way will Interstate Trailers be held liable for consequential damages such as rentals of substitute vehicles, loss of profits or other commercial losses or for damage by flood, fire or act of God.

Suspension alignments required as a result of a manufacturing deficiency are covered for 30 days after delivery to end user. Thereafter, all adjustments will be considered owner maintenance responsibility.

Further, new vehicle tires are warranted by their respective manufacturers and are not warranted by Interstate Trailers. Interstate Trailers will handle disposition of warranties on all other purchased components such as axles, suspensions, wheels and other purchased parts in conjunction with their respective manufacturers, and under the terms of their respective warranty policies.

Interstate Trailers, Inc. reserves the right to make changes in design and changes or improvements upon its equipment without imposing obligations upon itself to install the same upon its products theretofore manufactured.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED BY LAW OR OTHERWISE, AND THERE IS NO WARRANTY OF MERCHANTABILITY OR FITNESS OF PURPOSE.

Customer Registration Required By Law

Federal regulations require motor vehicle manufacturers to maintain a record of original owners of their equipment. Our Warranty Registration fulfills this requirement. Please make every effort to complete this document.

Factory Installed Options List Price

May 5, 2015

Options:	Models:		ST / TST		RBS / BST		PBS		DT / DTA		DLE / DLA		TDT / TDL		50DLA / 50TDL		LBG		70SDGN-AR		102SDGN	
	Models:		Models		Models		Models		Models		Models		Models		Models		Models		Models		Models	
Additional Deck Length Per Foot:			\$330		\$330		\$330		\$370		\$370		\$405		\$405		\$437		\$1,600		NA	
4' Stationary Deck (TDT Models):													\$1,040									
Additional Drawbar Per Foot:			\$280		\$280		\$280		\$320		\$320		\$355		\$355		N/A					
Tool Box Enclosure:			\$250		\$250		\$250		\$250		\$250		\$250		\$250		\$339					
Additional D-Rings:			\$30 ea.		\$30 ea.		\$30 ea.		\$30 ea.		\$30 ea.		\$30 ea.		\$30 ea.		\$30 ea.		\$67		\$67	
Stake Pockets:			\$45 ea.		\$45 ea.		\$45 ea.		\$45 ea.		\$45 ea.		\$45 ea.		\$45 ea.		\$70 ea.					
LED Light Package:			Included		Included		Included		Included		Included		Included		Included		Included		Included		Included	
Spare Tire Carrier:			\$135		\$135		\$135		\$135		\$135		\$135		\$135		\$135		\$166		\$166	
Hubodometer:			\$120		\$120		\$120		\$120		\$120		\$120		\$120		\$120		\$266		\$266	
Bucket Well In Beavertail:																						
3" Safety Rail																						
Standard Length Trailer:																						
Special Length Trailer:																						
Mid-Deck Turn Signal:			\$190		\$190		\$190		\$190		\$190		\$190		\$190		\$190					
Side Safety Step:			\$125		\$125		\$125		\$125		\$125		\$125		\$125		\$125					
"Apitong" Decking:																						
Diamond Plate Decking:																						
Loading Ramp Options:																						
72" Length in lieu of Standard:			\$205		\$205		\$205		\$270		\$270		\$270		\$270		\$270					
Tapered Steel Tips:			\$100		\$100		\$100		\$100		\$100		\$100		\$100		\$100					
Ramp adjustment to within 18":			\$285		\$285		\$285		\$285		\$285		\$285		\$285		\$285					
Vertical Ramp Storage:			Standard		Standard		Standard		\$302		\$155		\$155		\$155		\$155					
2-Way Spring Assist:									\$275		\$275		\$275		\$275		\$275					
Parking Jacks in lieu of Standard:																						
10,000 lb. Top Crank:			Standard		Standard		No Charge		No Charge		No Charge		No Charge		No Charge							
12,000 lb. Side Crank:							Standard		Standard		No Charge		Standard		Standard							
25,000 lb. 2-Speed (Single):							\$222		\$222		Standard		Standard		Standard							
Dual 12,000 lb. Dropleg Jacks:			\$403		\$403		\$403		\$295		\$295		\$295		\$295		\$295					
25,000 lb. 2-Speed (Dual):							\$795		\$795		\$530		\$530		\$530		\$795					

PAT KELLY

EQUIPMENT CO., INC.

5920 N. LINDBERGH BLVD.
HAZELWOOD, MISSOURI 63042-3124

MODOT BID 3-150723TV ITEM #2

Quotation No: 9071615-4

Interstate model 70SDGN-AR

General description:	70,000 lb. Non-ground bearing detachable neck lowboy trailer	Suspension:	Air ride with auto & manual controls.
Load capacity:	70,000 lbs. at 55 M.P.H. (G.V.W.R. 86,200 lbs.)	Axles:	(2) Spicer 25,000 lb. capacity with oil bath hubs.
Overall length:	45'-0"	Brakes:	16-1/2" x 7" air with anti-lock braking system and spring parking brakes on both axles.
Deck length:	25'-0"	Wheels:	10 hole, hub piloted disc, 8.25 x 22.5.
Deck width:	8'-6"	Tires:	(8) 255/70R22.5, (H).
Deck height:	24" unloaded, 22" loaded.	Hitch:	2" SAE king pin, 90" swing.
Frame construction:	Pierced mainbeam construction with one piece interlocking crossmembers. True (4) beam construction with positive camber and tapered frame design. Mainbeams: 16" fabricated I-beam. Siderails: 14" fabricated I-beam. Crossmembers: 10" I-beam 60,000 psi. on 24" centers.	Tie downs:	(16) heavy duty D-rings, 8 per side.
Decking:	1-1/2" "Apitong" decking secured with 5/16" torque screws, open in center.	Lights:	12 volt DOT & ICC approved. All lights are sealed LED and flush mounted in rubber grommets. Wiring is run in flexible neoprene jacket and modular in design. 7 way plug.
Outriggers:	11 per side, cast steel.	Boom well:	"V" crossmembers with steel grating in bottom.
Front flip ramps:	Integrated	Tool box:	Front and rear deck, uncovered.
Hydraulic operation:	Wetline		
Paint:	Black.		

Factory Installed Options:

Note: Optional equipment may change standard specifications.

- | | |
|--|--|
| ☒ Flush wheel well covers: | ☒ Additional deck length: <u>5</u> ft. |
| ☐ 13 HP "Honda" powerpack: | ☐ Additional tie down rings: _____ |
| ☐ 102" swing clearance: | ☐ Decking between main beams: _____ |
| ☐ Spare tire & wheel: | ☐ 3" safety rail: |
| ☐ Spare tire carrier: | ☐ Prepped for 3rd flip axle: |
| ☐ Steel, non-load bearing fenders: | ☐ 3rd flip axle: |
| ☐ Optional paint colors: | ☐ Strobe light package: |
| ☐ 3' Beavertail & 6' ramps: | |

Misc. options:

Price:

- ☐
- ☐
- ☐
- ☐

NOTES:

50' overall length

84" Swing Clearance

BID PRICE

\$57,514.00

INTERSTATE



70SDGN

THE
DEFINITION
OF VALUE

70,000 LB.
CARRYING CAPACITY

AIR RIDE SUSPENSION

FOUR (4) BEAM
CONSTRUCTION
WITH INTERLOCKING
CROSSMEMBERS

"APITONG" DECKING

(2) HEAVY DUTY 8"
LIFT CYLINDERS



Call factory for
dealer nearest you:

1-800-433-5384

www.interstatetrailers.com

INTERSTATE TRAILERS, INC.

Model: 70SDGN-AR

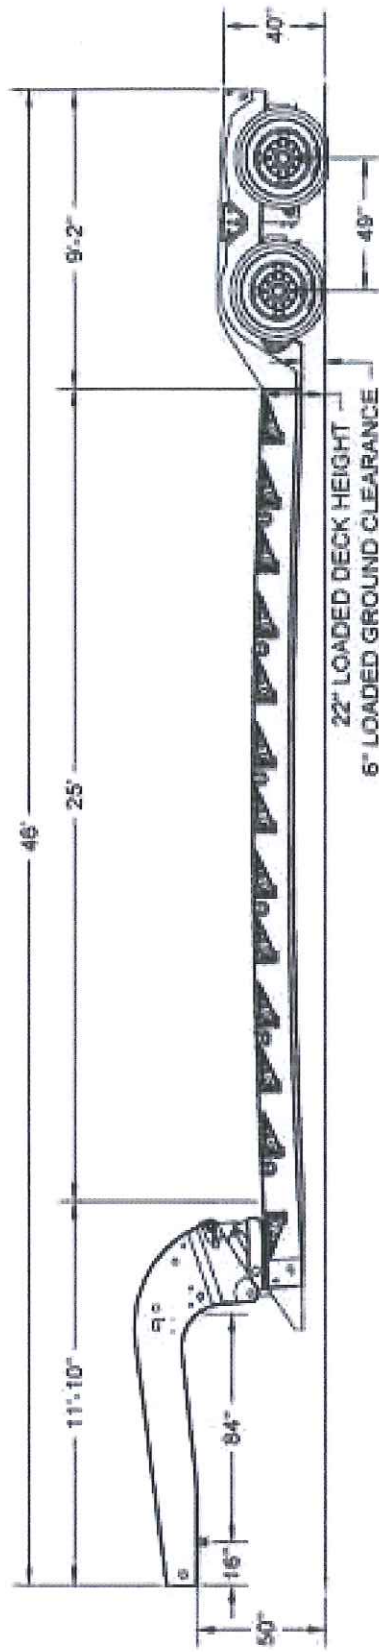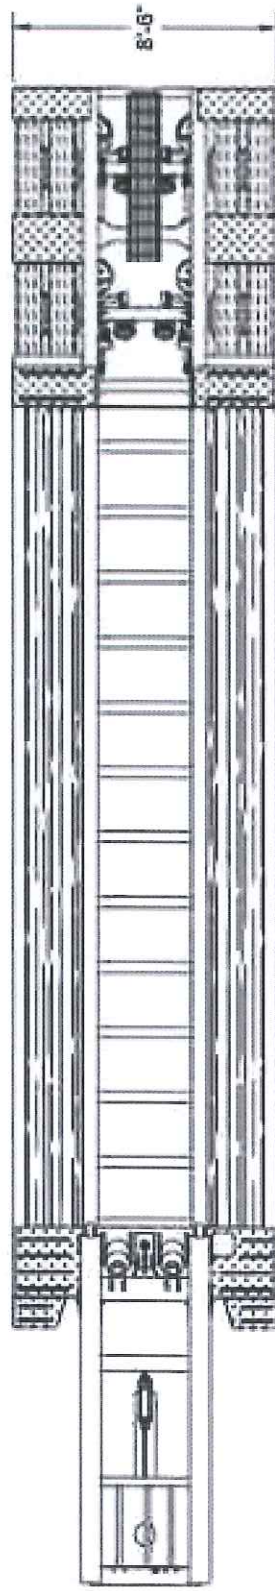

Load Capacity: 70,000 lbs. in 16"
 Weight: 16,200 lbs.
 Overall Length: 46'-0"
 Width: 8'-6"
 Deck Length: 25'-0"
 Deck Height: 22" Loaded
 Gooseneck: Hydraulic Removable, Non-Ground Bearing.
 (4) Position Ride Hgt. (2) 8" Lift Cylinders
 Wellline.
 48" - 52" Adjustable.
 5/16"
 16" Setting. 84" Swing Clearance.
 1-1/2" Apitong Covered Outside, Center Open.
 11 Per Side
 (16) Eight Per Side
 Rubber Mounted LED Lights & Sealed Wiring Harness.

Frame:

Pierced Main Beam Construction With One Piece, Interlocking Crossmembers.
 True (4) Beam Construction With Positive Camber and Tapered Frame Design.
 Main Beams: 16" Fabricated I-Beams.
 Side Beams: 14" Fabricated I-Beams.
 Crossmembers: 10" I-Beams
 60,000 lb. psi. on 24" Centers
 "V" Crossmembers With Steel Grating in Bottom
 Air Ride With Auto & Manual Controls.
 25,000 lb. Capacity, 77 5" Track.
 255/70R22.5 (H) Low Profile Radials.
 8.25 x 22.5 Steel Disc, Hub Piloted
 16-1/2" x 7" With Air Activated Outboard Drums.
 Automatic Slack Adjusters. Anti-lock Brake System and Spring Parking Brakes.

Boom Well:

Suspension
 Axles
 Tires
 Wheels
 Brakes

PAT KELLY

EQUIPMENT CO., INC.

5920 N. LINDBERGH BLVD.
HAZELWOOD, MISSOURI 63042-3124

MODOT BID 3-150723TV ITEM #3

Quotation No: 9071615-7

Interstate model 102SDGN

General description:	102,000 lb. Non-ground bearing detachable neck lowboy trailer	Suspension:	Air ride with auto & manual controls. Air lift 3rd axle.
Load capacity:	102,000 lbs. at 55 M.P.H. (G.V.W.R. 120,050 lbs.)	Axles:	(3) Spicer 25,000 lb. capacity with oil bath hubs. 54-1/2" axle spacings.
Overall length:	52'-0"	Brakes:	16-1/2" x 7" air with spring parking brakes on all axles.
Deck length:	25'-0"		
Deck width:	8'-6"		
Deck height:	24" unloaded, 22" loaded.		
Frame construction:	Pierced mainbeam construction with one piece interlocking crossmembers. True (4) beam construction with positive camber and tapered frame design. Mainbeams: 16" fabricated I-beam, 100K psi. Siderails: 14" fabricated I-beam, 100K psi. Crossmembers: 10" I-beam 60,000 psi. on 24" centers.	Wheels:	10 hole, hub piloted disc, 8.25 x 22.5.
Decking:	1-1/2" "Apitong" decking secured with 5/16" torque screws, open in center.	Tires:	(12) 255/70R22.5, (H).
Outriggers:	11 per side, cast steel.	Hitch:	2" SAE king pin, 90" swing.
Front ramps:	Integrated	Tie downs:	(16) heavy duty D-rings, 8 per side.
Hydraulic operation:	Wetline	Lights:	12 volt DOT & ICC approved. All lights are sealed LED and flush mounted in rubber grommets. Wiring is run in flexible neoprene jacket and modular in design. 7 way plug.
Paint:	Black.	Boom well:	"V" crossmembers with steel grating in bottom.
		Tool box:	Front lockable in deck.

Factory Installed Options:

Note: Optional equipment may change standard specifications.

- ☒ Flush wheel well covers:
- ☐ 13 HP "Honda" powerpack:
- ☒ 96" swing clearance:
- ☐ Spare tire & wheel:
- ☐ Spare tire carrier:
- ☒ Steel, non-load bearing fenders:
- ☐ Optional paint colors:

- ☐ Additional deck length: _____
- ☐ Additional tie down rings: _____
- ☒ Decking between main beams:
- ☐ 3" safety rail:
- ☐ Prepped for 4th flip axle:
- ☐ 4th flip axle:
- ☐ Strobe light package:

Misc. options:

Price:

- ☒ Steel pan in boom trough
- ☒ Front Flip Loading Ramps
- ☒ ABS System
- ☒ Hub Odometer

NOTES:


BID PRICE

\$68,920.00

INTERSTATE



102SDGN

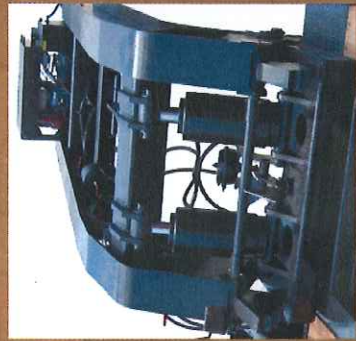

102,000 LB.
CARRYING CAPACITY

AIR RIDE SUSPENSION
WITH LIFT 3RD AXLE

FOUR (4) BEAM
CONSTRUCTION
WITH INTERLOCKING
CROSSMEMBERS

"APITONG" DECKING


(2) HEAVY DUTY 8"
LIFT CYLINDERS

Call factory for
dealer nearest you:

1-800-433-5384

www.interstatetrailers.com

THE
DEFINITION
OF VALUE

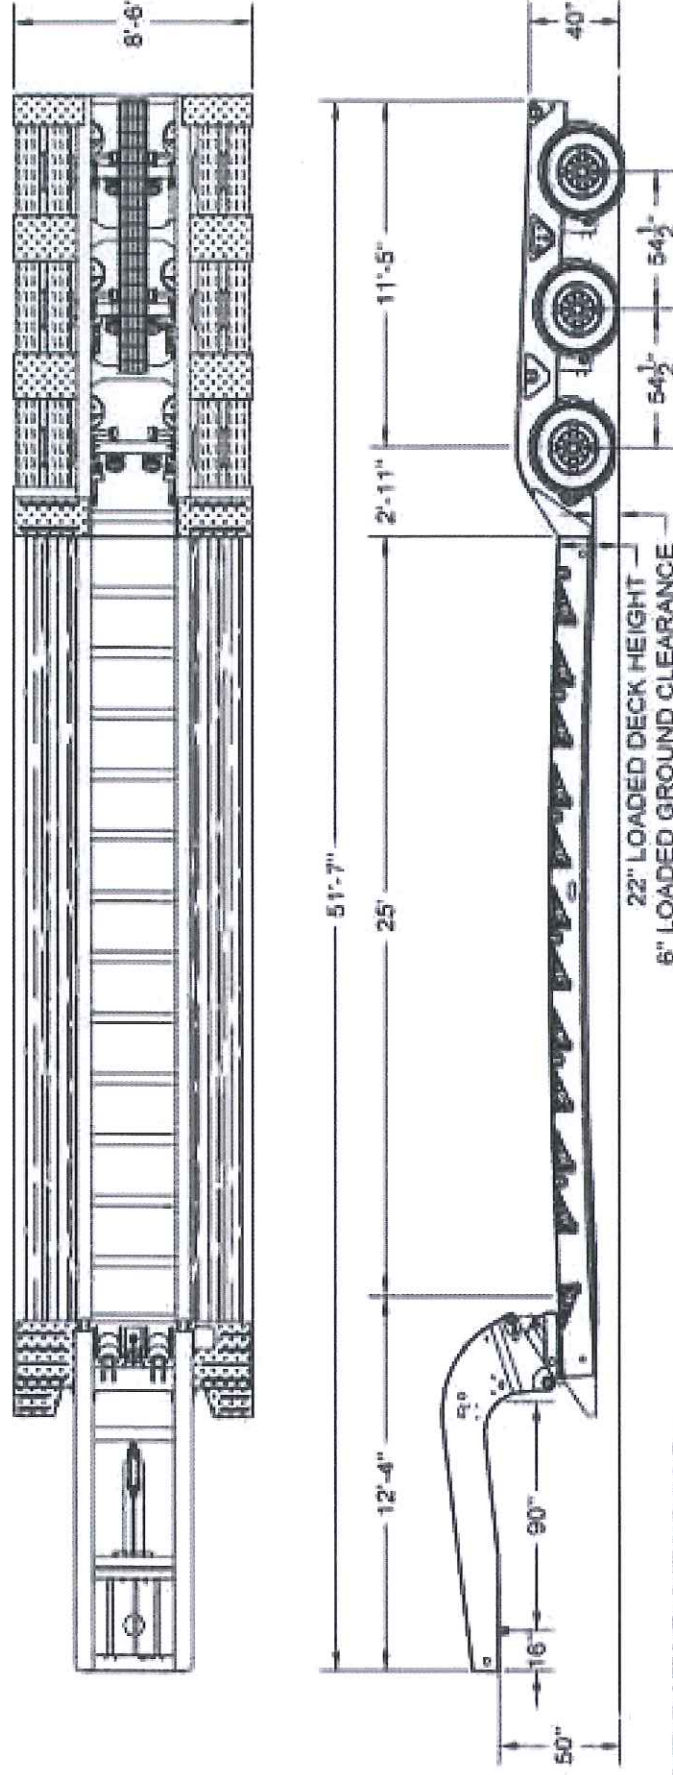

SPECIFICATIONS:

Load Capacity:	102,000 lbs. in 16"
Weight:	19,600 lbs.
Overall Length:	51'-7"
Width:	8'-6"
Deck Length:	25'-0"
Deck Height:	22" Loaded.
Gooseneck:	Hydraulic Removable, Non-Ground Bearing, (4) Position Ride Hgt., (2) 6" Lift Cylinders
Hydraulic operation:	Wetline.
Fifth Wheel Hgt.:	48" - 52" Adjustable
King Pin Plate:	5/16"
King Pin:	16" Setting 90° Swing Clearance.
Decking:	1-1/2" Apitong Covered Outside, Center Open
Outriggers:	12 Per Side.
Tie Downs:	(16) Eight Per Side.
Lights & Wiring:	Rubber Mounted LED Lights & Sealed Wiring Harness.

Frame

Pierced Main Beam Construction With One Piece, Interlocking Crossmembers.
(4) Beam Construction With Positive Camber and Tapered Frame Design.
Main Beams: 16" Fabricated I-Beams.
Side Beams: 14" Fabricated
Crossmembers: 10" I-Beams X 13 lbs. per ft., 60,000 lb. psi. on 24" Centers.
"V" Crossmembers With Steel Grating in Bottom
Air Ride With Auto & Manual Controls
25,000 lb. Capacity, 77.5" Track
255/70R22.5 (H) Low Profile Radials
8.25 x 22.5 Steel Disc, Hub Piloted
16-1/2" x 7" With Air Activated Outboard Drums
And Automatic Slack Adjusters
Spring Parking Brakes.

Boom Well
Suspension:
Axles
Tires
Wheels:
Brakes:

PAT KELLY

EQUIPMENT CO., INC.

5920 N. LINDBERGH BLVD.
HAZELWOOD, MISSOURI 63042-3124

MODOT BID 3-150723TV ITEM #4 (40,000#)

Quotation No: 9072015-2

Interstate model 40DLA - Standard Specification

General description:	40,000 lb. capacity tag-along trailer with beavertail & ramps.	Suspension:	Hutch 9700 multi-point spring with radius rod axle tracking adjustment, 44,000 lb. capacity.
Load capacity:	40000 lbs. at 55 M.P.H. (G.V.W.R. 47,350 lbs.)	Axles:	(2) Dexter 22,500 lb. capacity with oil bath hubs.
Overall length:	30'-0"	Brakes:	12-1/4" x 7-1/2" air with "Wabco" anti-lock braking system and spring parking brakes.
Deck length:	24'-0" (19'-0" flat deck + 5'-0" beavertail)	Wheels:	8 hole, hub piloted steel disc.
Deck width:	8'-6"	Tires:	215/75R17.5, (H)
Deck height:	36" unloaded	Ramps:	60" x 22" wood-filled with spring assist.
Frame construction:	Pierced mainbeam construction with one piece interlocking crossmembers. Mainbeams: W14" x 22 lbs. per ft., grade 50 Hi-tensile. Crossmembers: 6" I-beam x 3.7 lbs per ft., grade 50 Hi-tensile on 22" centers. 3/16" steel fabricated knee bracing on every other x-member. Siderails: C8" x 11.5 lbs. per ft. Grade 50 Hi-tensile.	Jack:	25,000 lb. 2 speed, side crank.
Headboard:	8" channel, full width of trailer.	Hitch:	4 position cast steel pintle eye, 1-5/8" stock, 3" I.D.
Decking:	2" nominal oak secured to crossmembers with 5/16" torque screws.	Tie downs:	(8) heavy duty D-rings, 4 per side.
Standard paint:	Black acrylic enamel. (Optional colors available) Rust prohibitive undercoating.	Lights:	12 volt DOT & ICC approved. All lights are LED type and flush mounted in rubber grommets. Wiring is run in flexible neoprene jacket and modular in design. 7 way plug.

Factory Installed Options:

Note: Optional equipment may change standard specifications.

- ☐ Paver package (6' beavertail + 6' ramps):
- ☒ 235/75R17.5, (H) tires:
- ☐ Lockable tool box lid:
- ☐ Spare tire & wheel:
- ☐ Spare tire carrier:
- ☐ Dual 2 speed landing gear:
- ☐ Angle iron traction on ramps: N/C
- ☐ Self-cleaning traction dovetail: N/C

- ☒ Additional deck length: 1
- ☐ Additional tie down rings:
- ☐ Stake pockets & rubrail:
- ☐ 3" safety rail:
- ☐ Bucket well in beavertail:
- ☐ Vertical ramp storage:
- ☐ 7' x 3' air assist ramps:

Misc. options:

- ☒ Polyurethane Paint
- ☒ Paint before decking
- ☒ Deck Level Ramps
- ☒ Governmental Discount

Price:

BID PRICE \$19,784.00

NOTES:

96" Overall Width

10 year warranty on lights

1 year warranty on harness

5' tongue

INTERSTATE

CONTINUOUS PIERCED
MAIN BEAM WITH
INTERLOCKING
CROSSMEMBERS
SYSTEM

SEALED BEAM
ELECTRICAL SYSTEM



HEAVY DUTY AIR
BRAKES

HEAVY DUTY SPRING
SUSPENSION

FRONT HEAD
BOARD STOP

UNDERCOATED

400DLA


THE
DEFINITION
OF VALUE



1101 HERITAGE PARKWAY MANSFIELD, TEXAS 76063

817/453-5402
800/433-5384
FAX 817/453-5445

Visit our Web site at www.interstatetrailers.com

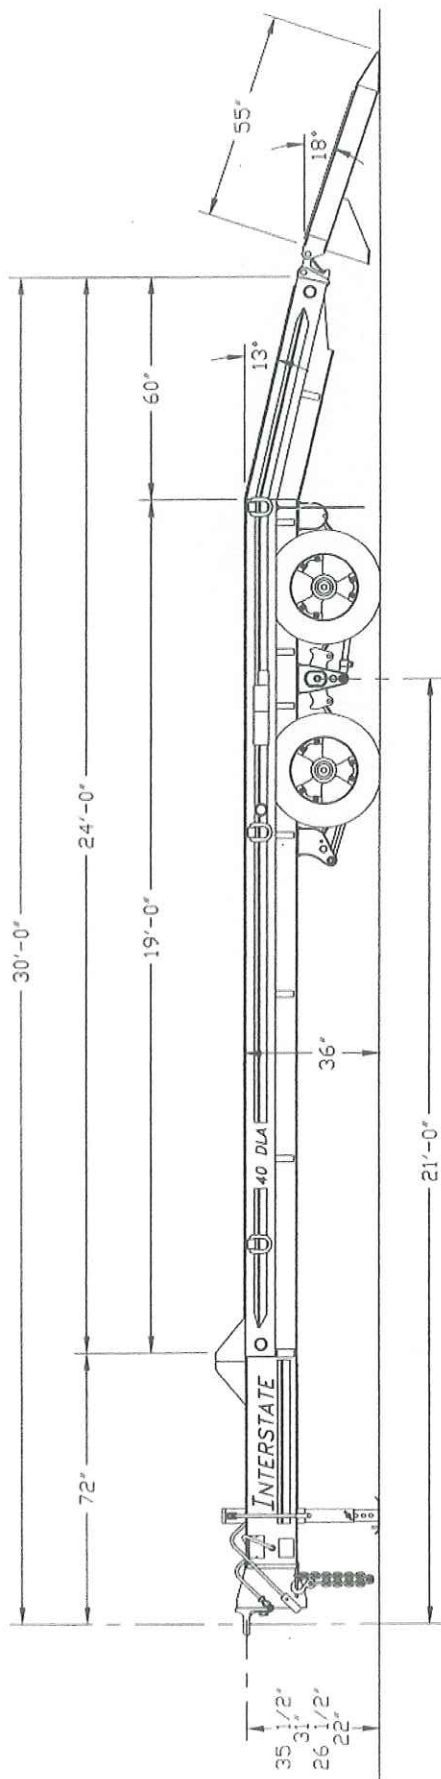

MODEL 40DLA

CAPACITY:	40,000# @ 55 MPH	Main Rails:	W14" x 22# A572 Gr. 50 High Tensile
Trailer Weight:	7,600#	Crossmembers:	6" Jr. I-Beam A572 Gr. 50 High Tensile
Overall Length:	30' 0"	Heavy Duty Axles:	(2) 22,500#
Overall Width:	96"/102"	Heavy Duty Brakes:	12 1/4" x 7 1/2" Air - ABS
Platform Length:	24' 0"	Heavy Duty Suspension:	H9700
Platform Height:	36"	Tires:	(8) 215/75R x 17.5 - 16 Ply Radial
Dovetail Length:	60"	Heavy Duty Wheels:	8 Hole, Hub Piloted
Ramp Length:	55"	Lights & Electric:	Sealed Beam System/ICC & DOT Approved
Ramp Width:	22 1/2"	Hitch:	Adjustable Pintle Eye
Decking:	2" Nominal Hardwood	Heavy Duty Jack:	12,000# Drop Leg

Your **INTERSTATE** Dealer is

Interstate Trailers, Inc. reserves the right to change design, material and/or specifications without notice and without incurring any obligation to such changes.

PAT KELLY

EQUIPMENT CO., INC.

5920 N. LINDBERGH BLVD.
HAZELWOOD, MISSOURI 63042-3124

MODOT BID 3-150723TV ITEM #4 (30,000#)

Quotation No: 9072015-3

Interstate model 30DLA - Standard Specification

General description:	30,000 lb. capacity tag-along trailer with beavertail & ramps.	Suspension:	Hutch 9700 multi-point spring with radius rod axle tracking adjustment, 44,000 lb. capacity.
Load capacity:	30,000 lbs. at 55 M.P.H. (G.V.W.R. 37,600 lbs.)	Axles:	(2) Dexter 22,500 lb. capacity with oil bath hubs.
Overall length:	30'-0"	Brakes:	12-1/4" x 7-1/2" air with "Wabco" anti-lock braking system and spring parking brakes.
Deck length:	24'-0" (19'-0" flat deck + 5'-0" beavertail)	Wheels:	8 hole, hub piloted steel disc.
Deck width:	8'-6"	Tires:	215/75R17.5, (H)
Deck height:	36" unloaded	Ramps:	60" x 22" wood-filled with spring assist.
Frame construction:	Pierced mainbeam construction with one piece interlocking crossmembers. Mainbeams: W14" x 22 lbs. per ft., grade 50 Hi-tensile. Crossmembers: 6" I-beam x 3.7 lbs per ft., grade 50 Hi-tensile on 22" centers. 3/16" steel fabricated knee bracing on every other x-member. Siderails: C8" x 11.5 lbs. per ft. Grade 50 Hi-tensile.	Jack:	25,000 lb. 2 speed, side crank.
Headboard:	8" channel, full width of trailer.	Hitch:	4 position cast steel pintle eye, 1-5/8" stock, 3" I.D.
Decking:	2" nominal oak secured to crossmembers with 5/16" torque screws.	Tie downs:	(8) heavy duty D-rings, 4 per side.
Standard paint:	Black acrylic enamel. (Optional colors available) Rust prohibitive undercoating.	Lights:	12 volt DOT & ICC approved. All lights are LED type and flush mounted in rubber grommets. Wiring is run in flexible neoprene jacket and modular in design. 7 way plug.

Factory Installed Options:

Note: Optional equipment may change standard specifications.

- ☐ Paver package (6' beavertail + 6' ramps):
- ☐ 235/75R17.5, (H) tires:
- ☐ Lockable tool box lid:
- ☐ Spare tire & wheel:
- ☐ Spare tire carrier:
- ☐ Dual 2 speed landing gear:
- ☐ Angle iron traction on ramps: N/C
- ☐ Self-cleaning traction dovetail: N/C

- ☒ Additional deck length: 1
- ☐ Additional tie down rings:
- ☐ Stake pockets & rubrail:
- ☐ 3" safety rail:
- ☐ Bucket well in beavertail:
- ☐ Vertical ramp storage:
- ☐ 7' x 3' air assist ramps:

Misc. options:

Price:

- ☒ Polyurethane Paint
- ☒ Paint before decking
- ☒ Deck Level Ramps
- ☒ Governmental Discount

NOTES:

96" Overall Width

10 year warranty on lights

1 year warranty on harness

5' tongue

BID PRICE

\$18,770.00

INTERSTATE

CONTINUOUS PIERCED
MAIN BEAM WITH
INTERLOCKING
CROSSMEMBERS
SYSTEM

FLUSH MOUNTED
LED LIGHTS



HEAVY DUTY AIR
BRAKES

HEAVY DUTY SPRING
SUSPENSION

25K, 2 SPEED JACK

UNDERCOATED


300DLA

THE
DEFINITION
OF VALUE



TRAILERS, INC. 1101 HERITAGE PARKWAY MANSFIELD, TEXAS 76063
Visit our Web site at www.interstatetrailers.com

817/453-5402
800/433-5384
FAX 817/453-5445

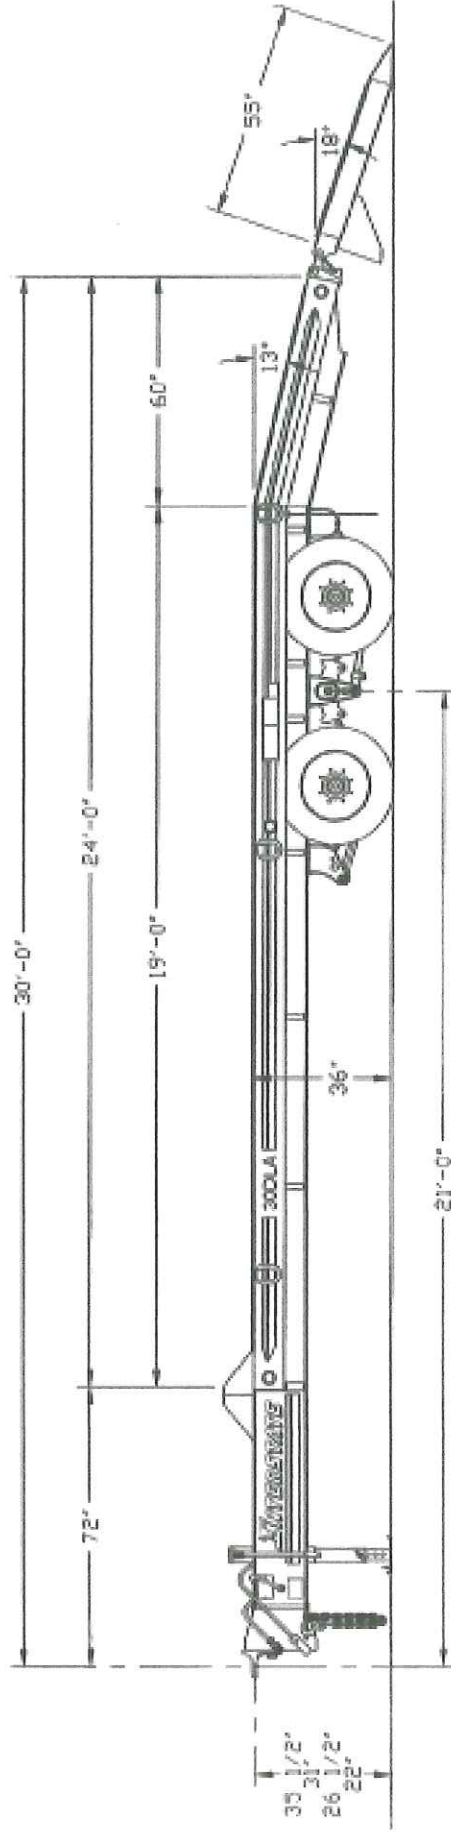

MODEL: 30DLA

CAPACITY:	30,000 lbs. @ 65 M.P.H.	Main Rails:	W14" x 22# A572 Gr. 50 High Tensile
Trailer Weight:	7,600# GVWR = 37,600 lbs.	Crossmembers:	6" Jr. I-Beam A572 Gr. 50 High Tensile
Overall Length:	30' 0"	Heavy Duty Axles:	(2) 22,500 lb. Dexter
Overall Width:	30" D	Heavy Duty Brakes:	12-1/4" x 7-1/2" Air with ABS
Platform Length:	24' 0"	Heavy Duty Suspension:	H9700 Multi-point Spring
Platform Height:	36"	Tires:	(8) 215/75R x 17.5 - 16 Ply Radial
Dovetail Length:	60"	Heavy Duty Wheels:	8 Hole, Hub Piloted Steel disc
Ramp Length:	55"	Lights & Electric:	LED System, ICC & DOT Approved
Ramp Width:	22 1/2"	Hitch:	Sealed, Modular Wiring Harness
Decking:	2" Nominal Hardwood	Heavy Duty Jack:	Adjustable Pintle Eye
			25,000 lb., 2 Speed

Your **INTERSTATE** Dealer Is

[Back To Index](#)

PAT KELLY

EQUIPMENT CO., INC.

5920 N. LINDBERGH BLVD.
HAZELWOOD, MISSOURI 63042-3124

MODOT BID 3-150723TV ITEM#4 (24,000# - 25,000#)

Quotation No: 9072015-4

Interstate model 24DTA

General description: 24,000 lb. capacity tag-along trailer with air brakes, beavertail & ramps.

Load capacity: 24000 lbs. at 55 M.P.H. (G.V.W.R. 30,250 lbs.)

Overall length: 29'-0"

Deck length: 24'-0" (19'-0" flat deck + 5'-0" beavertail)

Deck width: 8'-0"

Deck height: 35" unloaded

Frame construction: Pierced mainbeam construction with one piece interlocking crossmembers.
Mainbeams: W12" x 16 lbs. per ft., grade 50 Hi-tensile.
Crossmembers: 6" I-beam x 3.7 lbs per ft., grade 50 Hi-tensile on 18" centers.
Siderails: C8" x 11.5 lbs. per ft. Grade 50 Hi-tensile.

Headboard: 8" channel, full width of trailer.

Decking: 2" nominal oak secured to crossmembers with 5/16" torque screws.

Standard paint: Black acrylic enamel.
(Optional colors available)
Rust prohibitive undercoating.

Suspension: Hutch 9700 multi-point spring with radius rod axle tracking adjustment, 44,000 lb. capacity.

Axles: (2) Dexter 12,000 lb. capacity with oil bath hubs.

Brakes: 12-1/4" x 5" air with "Wabco" anti-lock braking system and spring parking brakes.

Wheels: 8 hole steel disc.

Tires: 235/80R16, (E), Cap: 3,000 lbs each.

Ramps: 58" x 21.5" traction with spring assist.

Jack: 12,000 lb. dropleg, side crank.

Hitch: 4 position cast steel pintle eye, 1-5/8" stock, 2-7/8" I.D.

Tie down: (8) heavy duty D-rings, 4 per side.

Lights: 12 volt DOT & ICC approved. All lights are LED type and flush mounted in rubber grommets. Wiring is run in flexible neoprene jacket and modular in design. 7 way plug.

Factory Installed Options:

Note: Optional equipment may change standard specifications.

- ☐ Paver package (6' beavertail + 6' ramps):
- ☐ Vertical ramp storage:
- ☐ Lockable tool box lid:
- ☐ Spare tire & wheel:
- ☐ Spare tire carrier:
- ☐ Deck Level Ramps:
- ☐ Wood filled ramps: N/C
- ☐ All wood dovetail: N/C

- ☒ Additional deck length: 1 FT
- ☐ Additional tie down rings:
- ☐ Stake pockets & rubrail:
- ☐ 3" safety rail:
- ☐ Bucket well in beavertail:
- ☐ 25,000 lb., 2 speed jack:
- ☐ 8' x 3' electric/hydraulic ramps:
- ☐ Dual 2 speed landing gear:

Misc. options:

Price:

- ☒ Polyurethane Paint
- ☒ Paint Before Decking
- ☒ 22.5K axles w/ 215/75R17.5 Tires/wheels
- ☒ Governmental Discount

NOTES:

96" Overall Width

10 year warranty on lights

1 year warranty on harness

5' tongue

BID PRICE

\$17,514.00

INTERSTATE

CONTINUOUS MAIN
BEAM WITH
INTERLOCKING
CROSSMEMBERS

DUAL WHEELS &
TANDEM AXLES



ABS

HEAVY DUTY SPRING
SUSPENSION

DISC TYPE WHEELS

20/240TA


THE
DEFINITION
OF VALUE



1101 HERITAGE PARKWAY MANSFIELD, TEXAS 76063

Visit our Web site at www.interstatetrailers.com

817/453-5402
800/433-5384
FAX 817/453-5445

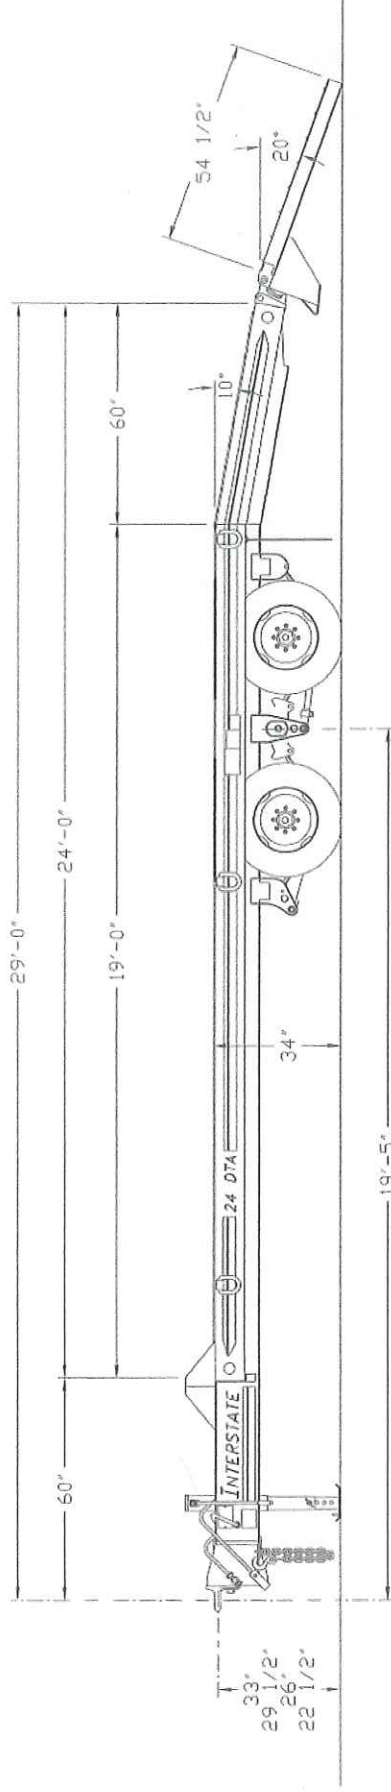

Model 24DTA

Your **INTERSTATE** Dealer Is

CAPACITY:	24,000# @ 65 MPH	Main Rails:	W12" x 16# A572 Gr. 50 High Tensile
Overall Weight:	6250#	Crossmembers:	6" Jr. I Beam A572 Gr. 50 High Tensile
Overall Length:	29' 0"	Heavy Duty Axles:	(2) "Dexter" 12,000#
Overall Width:	96" / 102"	Heavy Duty Brakes:	Air, 12-1/4" x 5" with ABS
Platform Length:	24' 0"	Heavy Duty Suspension:	H9700
Platform Height:	34"	Tires:	235/80R16, (E)
Dovetail Length:	60"	Heavy Duty Wheels:	8 hole "Budd" Type Disc
Ramp Length:	54 1/2"	Lights & Electric:	Sealed Beam System/ICC & DOT Approved
Ramp Width:	21 1/2"	Hitch:	Adjustable Pintle Eye
Decking:	2" Nominal Hardwood	Landing Legs:	12,000#

Interstate Trailers, Inc. reserves the right to change design, material and/or specifications without notice and without incurring any obligation to such changes.