
Mowing Project #SL_2013_D Route I-270 St. Louis County Project Detail Sheet 1 of 4

Contract Limits and Location Sketch

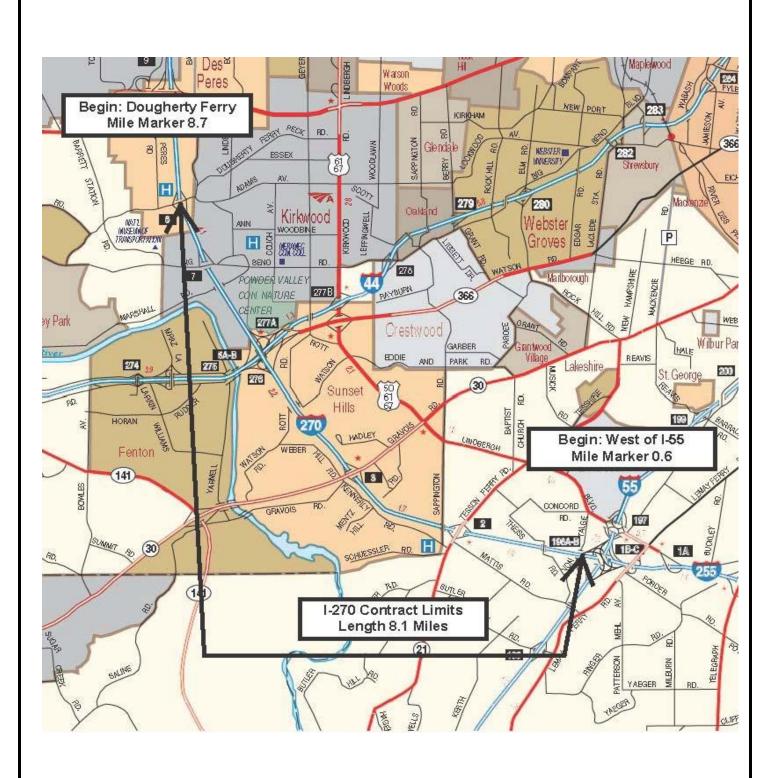

Mowing Project #SL_2013_D Route I-270 St. Louis County Project Detail Sheet 2 of 4

Contract Term and Extension

Initial Contract Term: Commencing April 15, 2013 and shall terminate November 30, 2013 First Extended Term: Commencing April 15, 2014 and shall terminate November 30, 2014 Second Extended Term: Commencing April 15, 2015 and shall terminate November 30, 2015

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

Route 270

Begin Point:Dougherty Ferry (MM 8.7)End Point:Von Talge Overpass, West of I-55 Interchange (MM 0.6)

See attached I-270 Display for mowing areas.

Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule

April 1 through June 30: 1 mowing cycle

July 1 through November 30: 1 mowing cycle, 1 optional cycle, 1 final mowing cycle

TOTAL MOWING & LITTER REMOVAL CYCLES: 3 (optional cycle not included)

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

TOTAL AREA PER MOWING CYCLE (APPROXIMATE): 40 ACRES TOTAL AREA PER FINAL MOWING CYCLE (APPROXIMATE): 42 ACRES

Total Area in Contract Limits (Acres) Number of Mowing X Cycles During Contract = Term

Total Mowing Quantity During Contract Term (Acres)

					Mowing Project #SL_20 Route I-270 St. Louis County Project Detail Sheet 3 of	
	40 42	X X	2* 1	= =	80* 42	
TOTAL CONTRACT QUANTITY – MOWING: 122 ACRES*						
* optional cycle not included						
Litter Removal Quantities						
In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.						
Con	tal Area in tract Limits (Acres)		f Litter Remova Juring Contract Term		Litter Removal Quantity ring Contract Term (Acres)	
	40 42	X X	2* 1	=	80* 42	
	42	^	1	=	42	
TOTAL CONTRACT QUANTITY – LITTER REMOVAL: 122 ACRES*						
* optional cycle not included						
Contract Time for Completion of Work						
The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.						
Mowing Cycle with Litter Removal Cycle: 40 Acre Cycle: 5 Working Days 42 Acre Cycle: 5 Working Days						
Mowing Height & Special Equipment						
1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.						
2) No special equipment or equipment restrictions are required for this contract.						
 All grass and ve directed by the eng 	•	e cut and trim	med to a height	t of six (6)	inches unless otherwise	

