
Mowing Project SL-2013-A Interstate 64 St Louis County Project Detail Sheet 1 of 4

# **Contract Limits and Location Sketch**

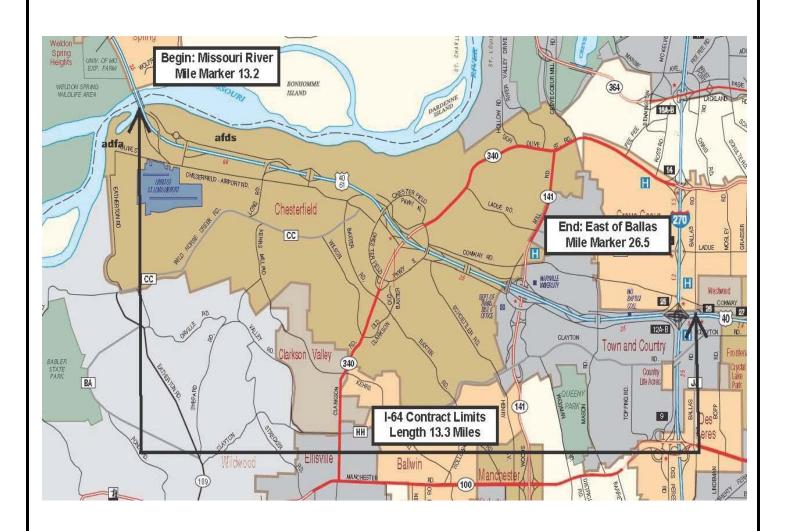

Mowing Project SL-2013-A Interstate 64 St Louis County Project Detail Sheet 2 of 4

#### **Contract Term and Extension**

Initial Contract Term: Commencing April 15, 2013 and shall terminate November 30, 2013 First Extended Term: Commencing April 15, 2014 and shall terminate November 30, 2014 Second Extended Term: Commencing April 15, 2015 and shall terminate November 30, 2015

#### **Contract Limits and Exclusions**

The following areas shall be included in the contract limits:

Route 40

Begin Point: Missouri River (MM 13.2)

End Point: East of Ballas, East of I-270 Interchange (MM 26.5)

See attached I-64 Display for mowing areas.

#### Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule

April 1 through June 30: 1 mowing cycle

July 1 through November 30: 1 mowing cycle, 1 optional cycle, 1 full mowing cycle

TOTAL MOWING & LITTER REMOVAL CYCLES: 3 (optional cycle not included)

### **Mowing Quantities**

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

TOTAL AREA PER MOWING CYCLE (APPROXIMATE): 112 ACRES
TOTAL AREA PER FINAL MOWING CYCLE (APPROXIMATE): 149 ACRES

Total Area in Number of Mowing Total Mowing Quantity
Contract Limits X Cycles During Contract = During Contract Term

Mowing Project SL-2013-A Interstate 64 St Louis County Project Detail Sheet 3 of 4

(Acres)		(Acres)		
112	X	2*	=	224*
149	X	1	=	149

TOTAL CONTRACT QUANTITY – MOWING: 373 ACRES\*

#### **Litter Removal Quantities**

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in				otal Litter Removal Quantity
Contract Limits	X	Cycles During Contract	=	During Contract Term
(Acres)		Term		(Acres)
112	v	2		224*
112	X	4	=	224
149	X	1	=	149

TOTAL CONTRACT QUANTITY - LITTER REMOVAL: 373 ACRES\*

### **Contract Time for Completion of Work**

The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

Mowing Cycle with Litter Removal Cycle: 112 Acre Cycle: 9 Working Days 149 Acre Cycle: 12 Working Days

### **Mowing Height & Special Equipment**


- 1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) All grass and vegetation shall be cut and trimmed to a height of six (6) inches unless otherwise directed by the engineer.

<sup>\*</sup> optional cycle not included

<sup>\*</sup> optional cycle not included

Mowing Project SL-2013-A Interstate 64 St Louis County Project Detail Sheet 4 of 4

## **Special Sign Detail**

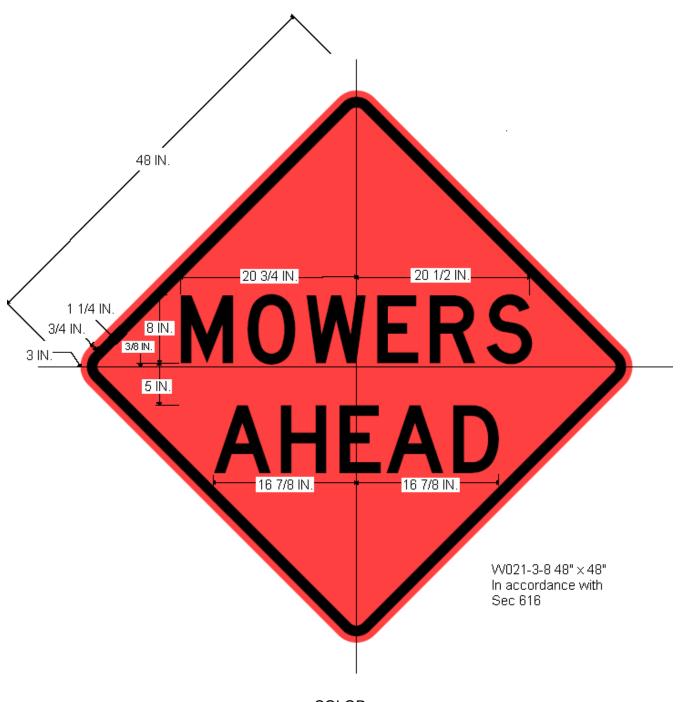

<u>COLOR</u> Legend & Border – Black Background – Orange

SHEETING MoDOT Florescent Orange