


Contract Limits and Location Sketch

SL13-095-RW

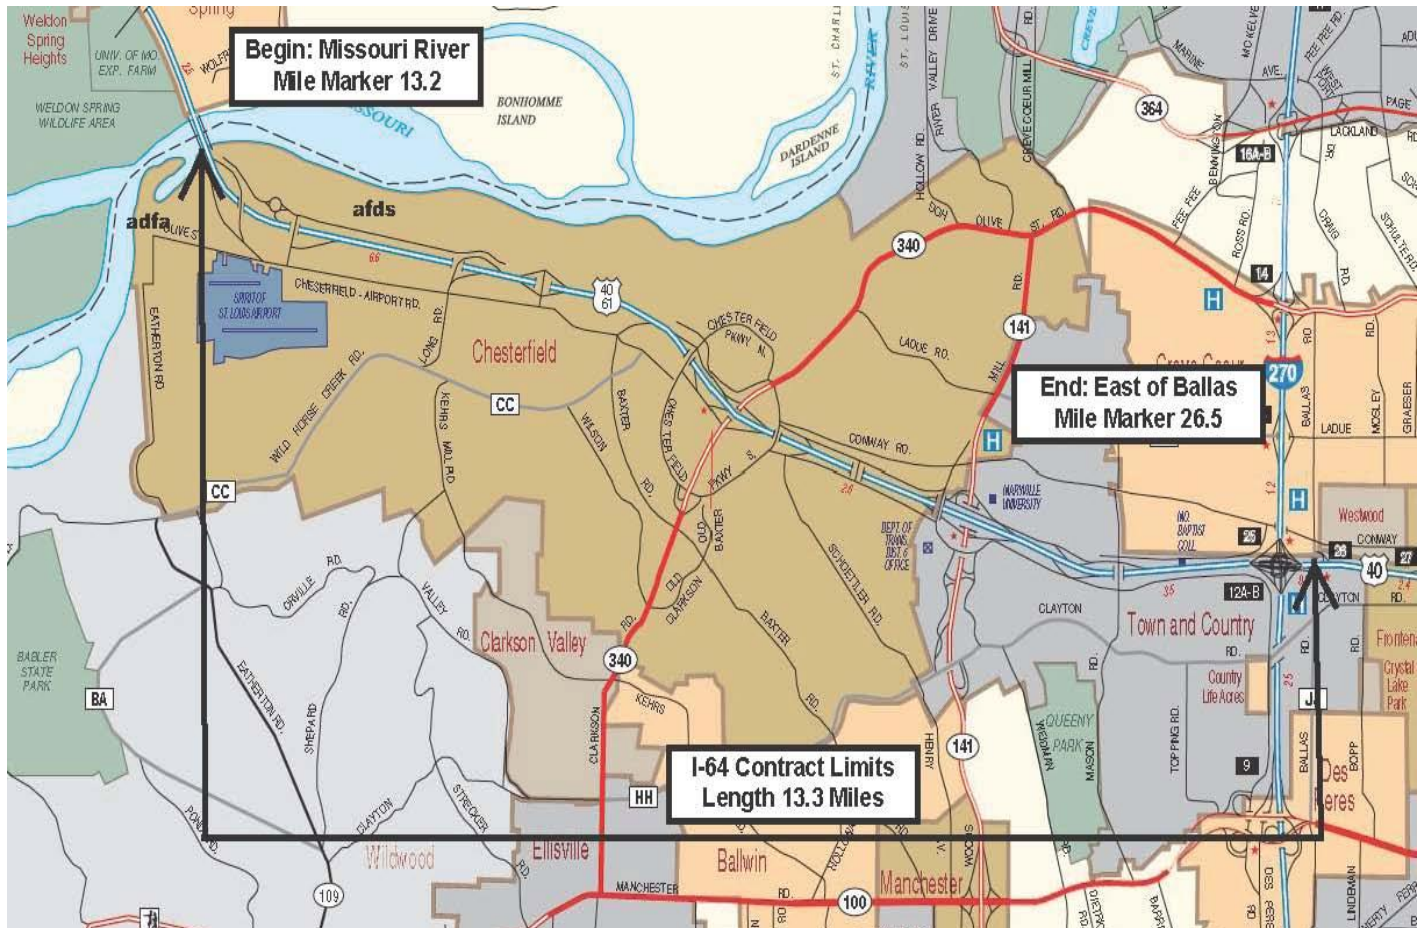

Contract Term and Extension

Initial Contract Term: Commencing April 15, 2013 and shall terminate November 30, 2013
First Extended Term: Commencing April 15, 2014 and shall terminate November 30, 2014
Second Extended Term: Commencing April 15, 2015 and shall terminate November 30, 2015

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

Route 40

Begin Point: Missouri River (MM 13.2)

End Point: East of Ballas, East of I-270 Interchange (MM 26.5)

See attached I-64 Display for mowing areas. Yellow areas and quantities represent 30' mow cycle, red areas and quantities represent additional mow out quantities to be added to 30' mow cycle during the full mow cycle.

Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule

April 1 through June 30: 1 mowing cycle

July 1 through November 30: 1 mowing cycle, 1 optional cycle, 1 full mowing cycle

TOTAL MOWING & LITTER REMOVAL CYCLES: 3 (optional cycle not included)

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

TOTAL AREA PER 30' MOWING CYCLE (APPROXIMATE): 90 ACRES
TOTAL AREA PER FULL MOWING CYCLE (APPROXIMATE): 112 ACRES

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
90	X	2*	=	180*
112	X	1	=	112

TOTAL CONTRACT QUANTITY – MOWING: 292 ACRES*

* optional cycle not included

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in Contract Limits (Acres)	X	Number of Litter Removal Cycles During Contract Term	=	Total Litter Removal Quantity During Contract Term (Acres)
90	X	2	=	180*
112	X	1	=	112

TOTAL CONTRACT QUANTITY – LITTER REMOVAL: 292 ACRES*

* optional cycle not included

Contract Time for Completion of Work

The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

Mowing Cycle with Litter Removal Cycle:


90 Acre Cycle: 6 Working Days

112 Acre Cycle: 8 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) All grass and vegetation shall be cut and trimmed to a height of six (6) inches unless otherwise directed by the engineer.

Special Sign Detail

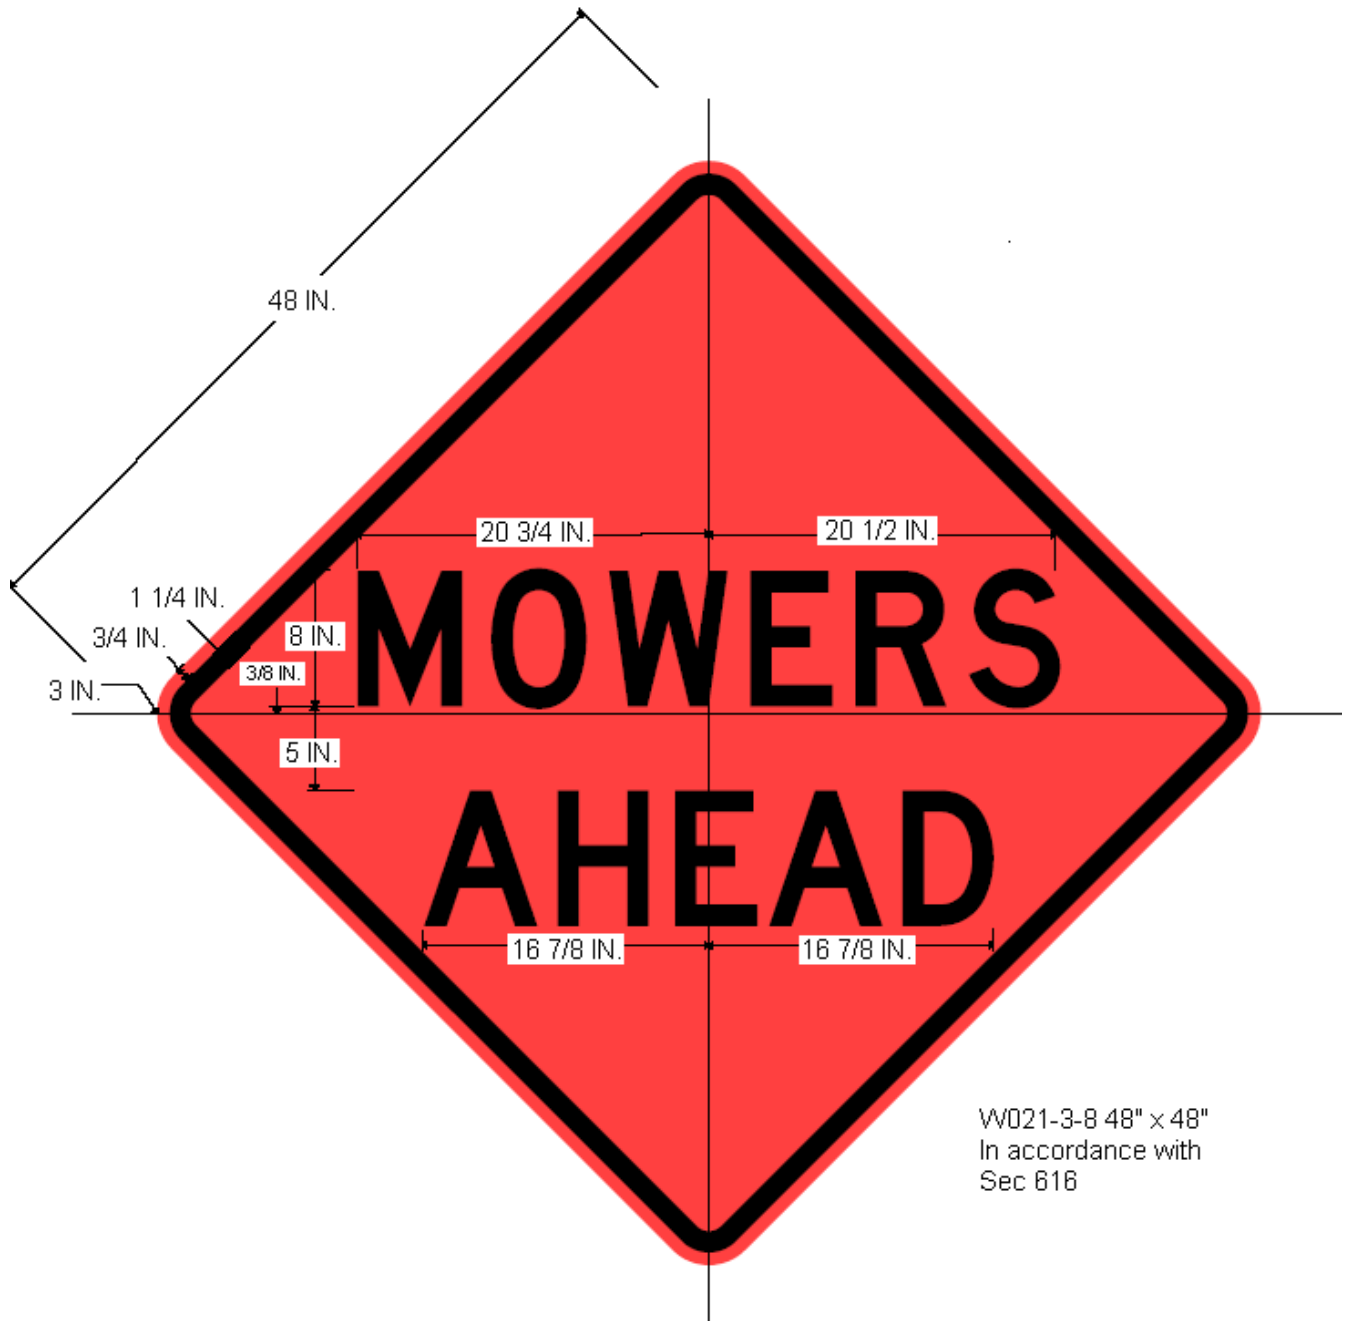

W021-3-8 48" x 48"
In accordance with
Sec 616

COLOR

Legend & Border – Black
Background – Orange

SHEETING

MoDOT Florescent Orange