


Contract Limits and Location Sketch

SL14-100-RW7

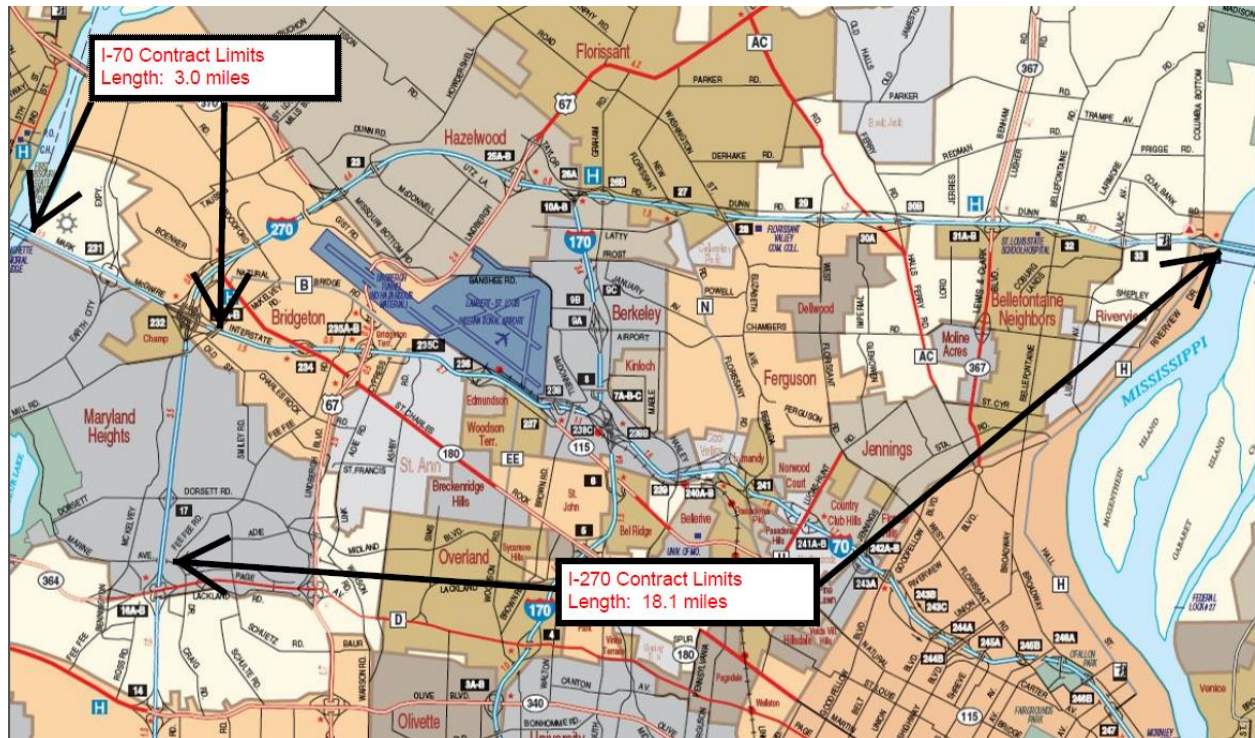

Contract Term and Extension

Initial Contract Term: Commencing [from contract execution](#) and shall terminate [November 30, 2014](#)
First Extended Term: Commencing [April 1, 2015](#) and shall terminate [November 30, 2015](#)
Second Extended Term: Commencing [April 1, 2016](#) and shall terminate [November 30, 2016](#)

Contract Limits and Exclusions

[See attached display for mowing areas.](#)

Mowing and Litter Removal Cycles

4 mowing and litter removal cycles are anticipated
This contract will also include 2 additional supplemental cycles.
The limits of the supplemental cycle is noted on sheets 20 -26 of the plan sheets.

The supplemental cycles will occur in addition to and in between the regular cycles.

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and the anticipated number of mowing cycles are authorized.

The quantities are calculated as follows:

TOTAL AREA PER REGULAR MOWING CYCLE (APPROXIMATE): 386.58 ACRES
TOTAL AREA PER FULL MOWING CYCLE (APPROXIMATE): 527.61 ACRES
TOTAL AREA PER SUPPLEMENTAL MOWING CYCLE (APPROXIMATE): 137.65 ACRES

| Total Area in Contract Limits (Acres) | X | Number of Mowing Cycles During Contract Term | = | Total Mowing Quantity During Contract Term (Acres) |
|---|----------|--|----------|--|
| 386.58 (REG) | X | 3 | = | 1159.74 |
| 527.61 (FULL) | X | 1 | = | 527.61 |
| 137.65 (SUPP) | X | 2 | = | 275.3 |

TOTAL CONTRACT QUANTITY – MOWING: 1962.65 ACRES

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

| Total Area in Contract Limits (Acres) | X | Number of Litter Removal Cycles During Contract Term | = | Total Litter Removal Quantity During Contract Term (Acres) |
|---|---|--|---|--|
| 386.58 | X | 3 | = | 1159.74 |
| 527.61 | X | 1 | = | 527.61 |
| 137.65 | X | 2 | = | 275.3 |

TOTAL CONTRACT QUANTITY – LITTER REMOVAL: 1962.65 ACRES

Contract Time for Completion of Work

The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

Mowing Cycle with Litter Removal Cycle:

386.58 Acre Cycle: 15 Working Days


527.61 Acre Cycle: 20 Working Days

137.65 Acre Cycle: 9 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) All grass and vegetation shall be cut and trimmed to a height of six (6) inches unless otherwise directed by the engineer.

Special Sign Detail

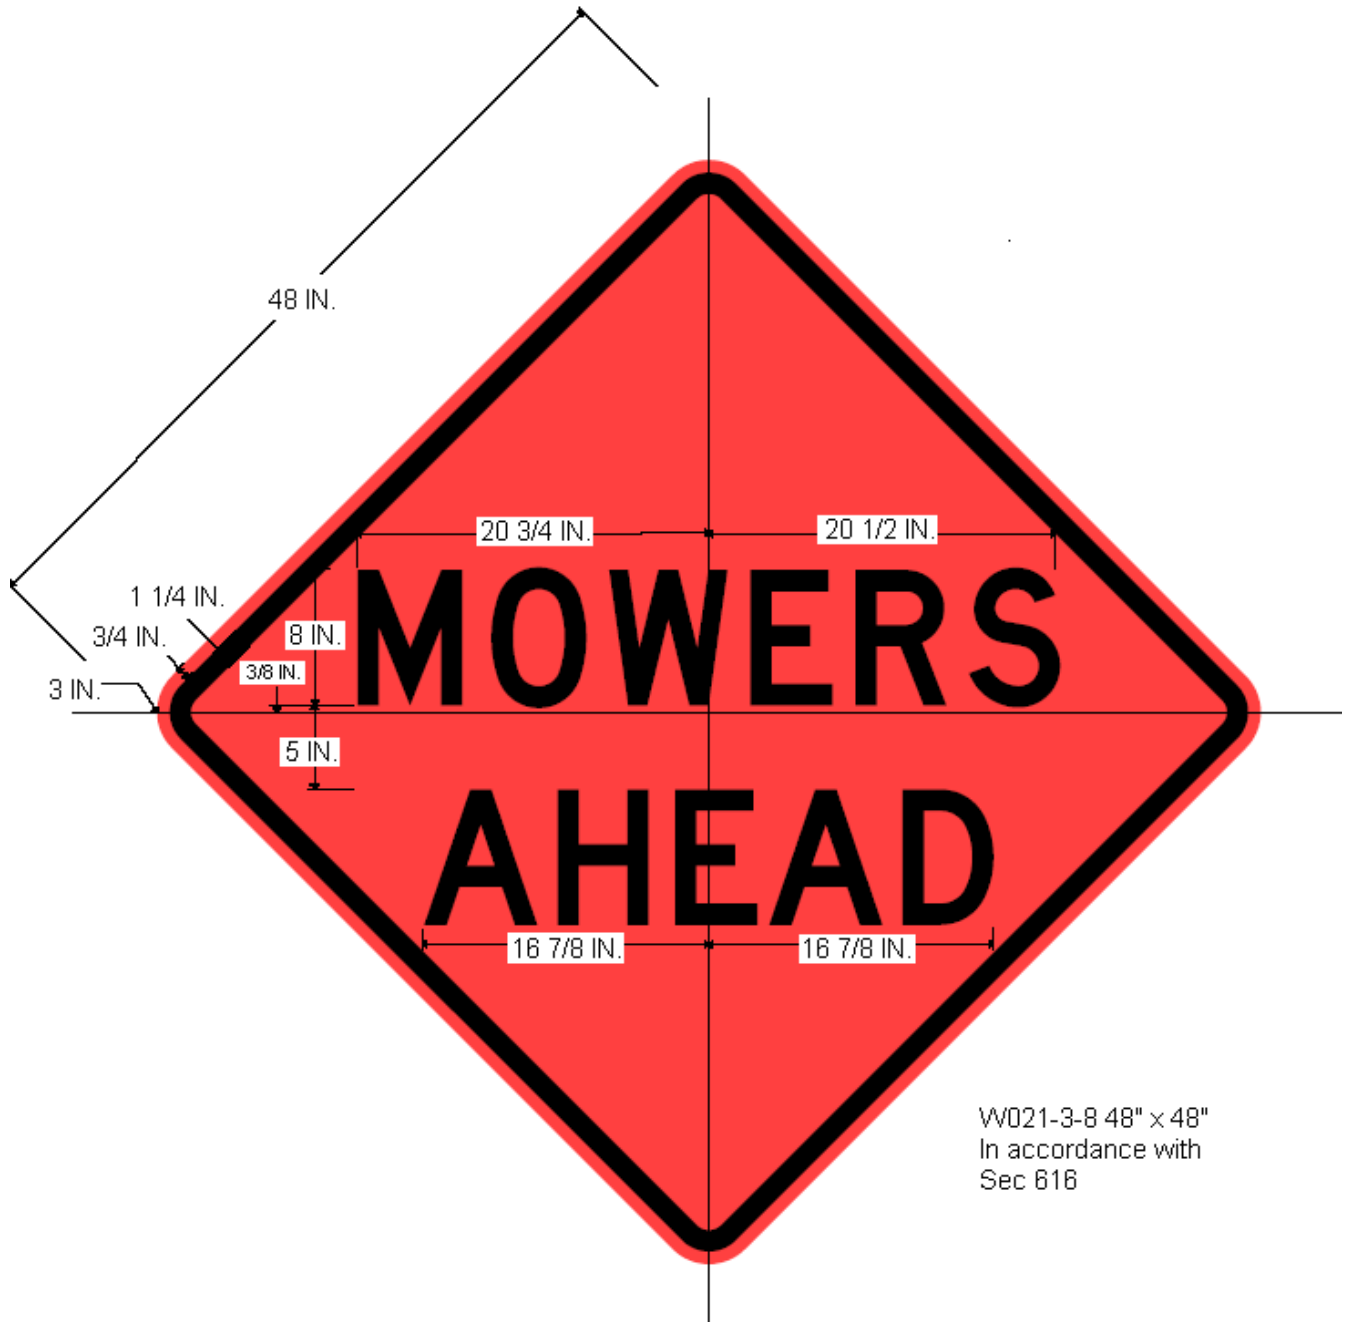

W021-3-8 48" x 48"
In accordance with
Sec 616

COLOR

Legend & Border – Black
Background – Orange

SHEETING

MoDOT Florescent Orange