
Mowing Project SL-2014-D Interstate 55 City of St. Louis Project Detail Sheet 1 of 4

Contract Limits and Location Sketch

SL14-102-RW7

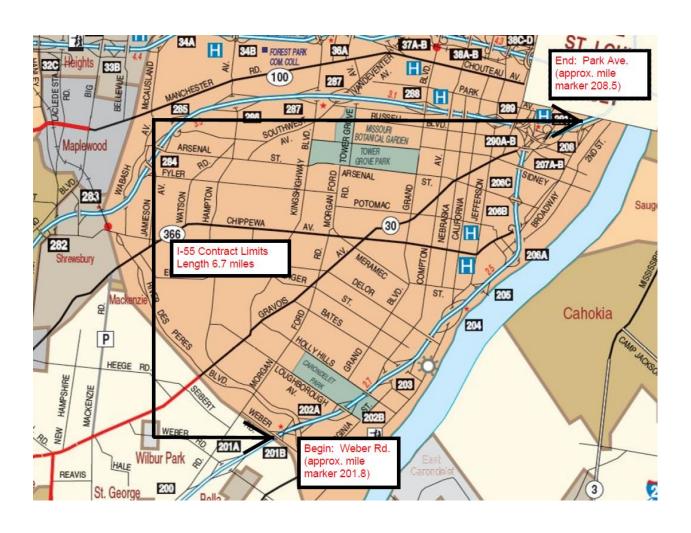

Mowing Project SL-2014-D Interstate 55 City of St. Louis Project Detail Sheet 2 of 4

Contract Term and Extension

Initial Contract Term: Commencing Contract Execution Date and shall terminate November 30, 2014
First Extended Term: Commencing April 1, 2015 and shall terminate November 30, 2015
Second Extended Term: Commencing April 1, 2016 and shall terminate November 30, 2016

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

I-55

Begin Point: Weber Road

(approximate mile marker 201.8)

End Point: Park Avenue (1/4 mile north of I-44)

(approximate mile marker 208.5)

Notes:

1) Includes all areas between and adjacent to ramps at interchanges.

2) Includes all areas at I-44 interchange from Mississippi Avenue on the west to Lafayette Avenue on the north

Exclusions: There are no areas that shall be excluded from the contract limits unless otherwise directed by the engineer:

Mowing and Litter Removal Cycles

8 mowing and litter removal cycles are anticipated

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and the anticipated number of mowing cycles are authorized.

The quantities are calculated as follows:

TOTAL AREA PER MOWING CYCLE (APPROXIMATE): 130 ACRES

Total Area in

Contract Limits
(Acres)

Number of Mowing

Total Mowing Quantity

During Contract Term

(Acres)

Term

(Acres)

130 X 8 = 1040

TOTAL CONTRACT QUANTITY - MOWING: 1040 ACRES

Mowing Project SL-2014-D Interstate 55 City of St. Louis Project Detail Sheet 3 of 4

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in
Contract Limits
(Acres)

Number of Litter Removal Total Litter Removal Quantity

Cycles During Contract
Term

Term

(Acres)

X

8

= 1040

TOTAL CONTRACT QUANTITY - LITTER REMOVAL: 1040 ACRES

Contract Time for Completion of Work

The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.


Mowing Cycle with Litter Removal Cycle: 130 Acre Cycle: 11 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of 2 to 6 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) All grass and vegetation shall be cut and trimmed to a height of four (4) inches unless otherwise directed by the engineer.

Mowing Project SL-2014-D Interstate 55 City of St. Louis Project Detail Sheet 4 of 4

Special Sign Detail

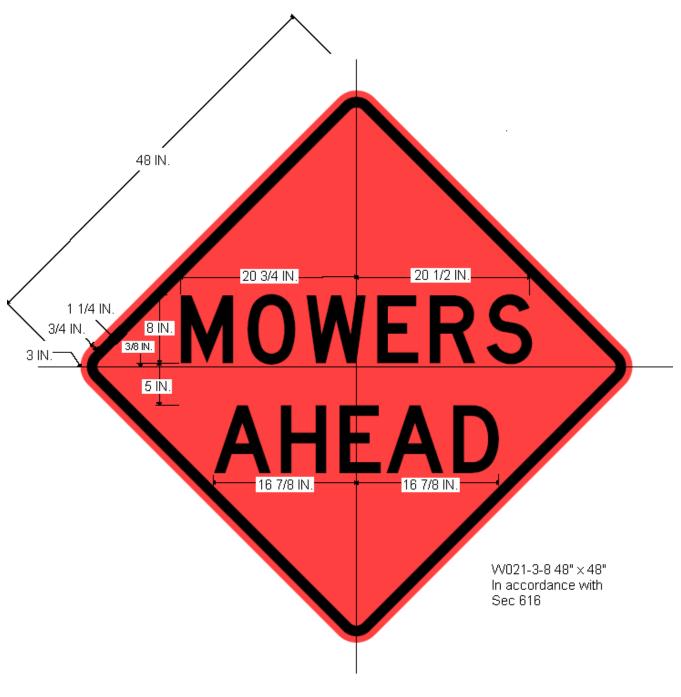

COLOR Legend & Border – Black Background – Orange

SHEETING MoDOT Florescent Orange