


Contract Limits and Location Sketch

SL14-104-RW7

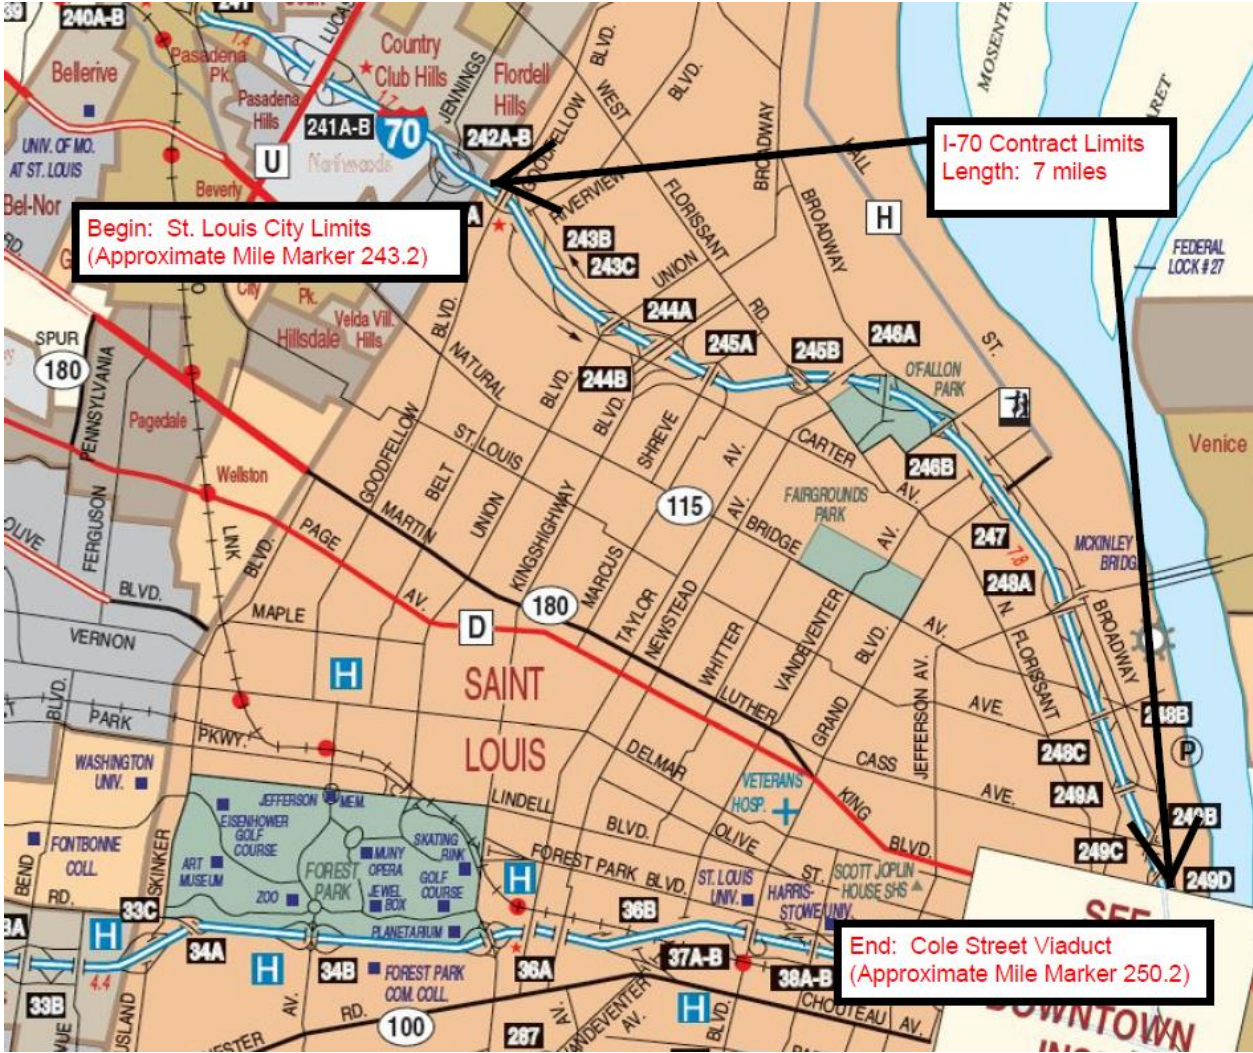

Contract Term and Extension

Initial Contract Term: Commencing [Contract Execution Date](#) and shall terminate [November 30, 2014](#)
First Extended Term: Commencing [April 1, 2015](#) and shall terminate [November 30, 2015](#)
Second Extended Term: Commencing [April 1, 2016](#) and shall terminate [November 30, 2016](#)

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

I-70

Begin Point: St Louis City Limits (west of Goodfellow Avenue)
(approximate mile marker 243.2)

End Point: Cole Street Viaduct
(approximate mile marker 250.2)

Location Specific Details:

1) Parcel Located at Eastbound I-70 Exit onto Bircher Blvd East of Shreve Ave

- Triangular parcel of land bounded by Sexauer Ave to the west, Bircher Blvd to the north, and the alley to the east.

2) Northwest Quadrant of Westbound I-70 at East Taylor:

- Triangular parcel of land bounded by E Taylor Ave to the northwest, private parcel to the northeast, and the fence along I-70 to the south.

Notes:

- 1) Includes all areas between and adjacent to ramps at interchanges.

Exclusions: The following are known areas that shall be excluded from the contract limits unless otherwise directed by the engineer:

<u>ROUTE</u>	<u>DIRECTION</u>	<u>CROSS STREET</u>	<u>DESCRIPTION</u>	<u>ACREAGE</u>
I-70		Various	Daffodil beds (See note below *)	N/A

* Note: Most interchanges along this section of I-70 have daffodil beds which bloom in the spring. The beds shall be left undisturbed and mowed around until approximately June 15 or as otherwise directed by the engineer. No deduction from the total mowing acres has been made.

TOTAL EXCLUSIONS (APPROXIMATE):

0 ACRES

Mowing and Litter Removal Cycles

8 mowing and litter removal cycles are anticipated

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and the anticipated number of mowing cycles are authorized.

The quantities are calculated as follows:

TOTAL AREA PER MOWING CYCLE (APPROXIMATE): 105 ACRES

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
105	X	8	=	840

TOTAL CONTRACT QUANTITY – MOWING: 840 ACRES

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in Contract Limits (Acres)	X	Number of Litter Removal Cycles During Contract Term	=	Total Litter Removal Quantity During Contract Term (Acres)
105	X	8	=	840

TOTAL CONTRACT QUANTITY – LITTER REMOVAL: 840 ACRES

Contract Time for Completion of Work


The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

**Mowing Cycle with Litter Removal Cycle:
105 Acre Cycle: 9 Working Days**

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of **2 to 6** inches.
- 2) **No special equipment or equipment restrictions are required for this contract.**
- 3) All grass and vegetation shall be cut and trimmed to a height of **four (4)** inches unless otherwise directed by the engineer.

Special Sign Detail

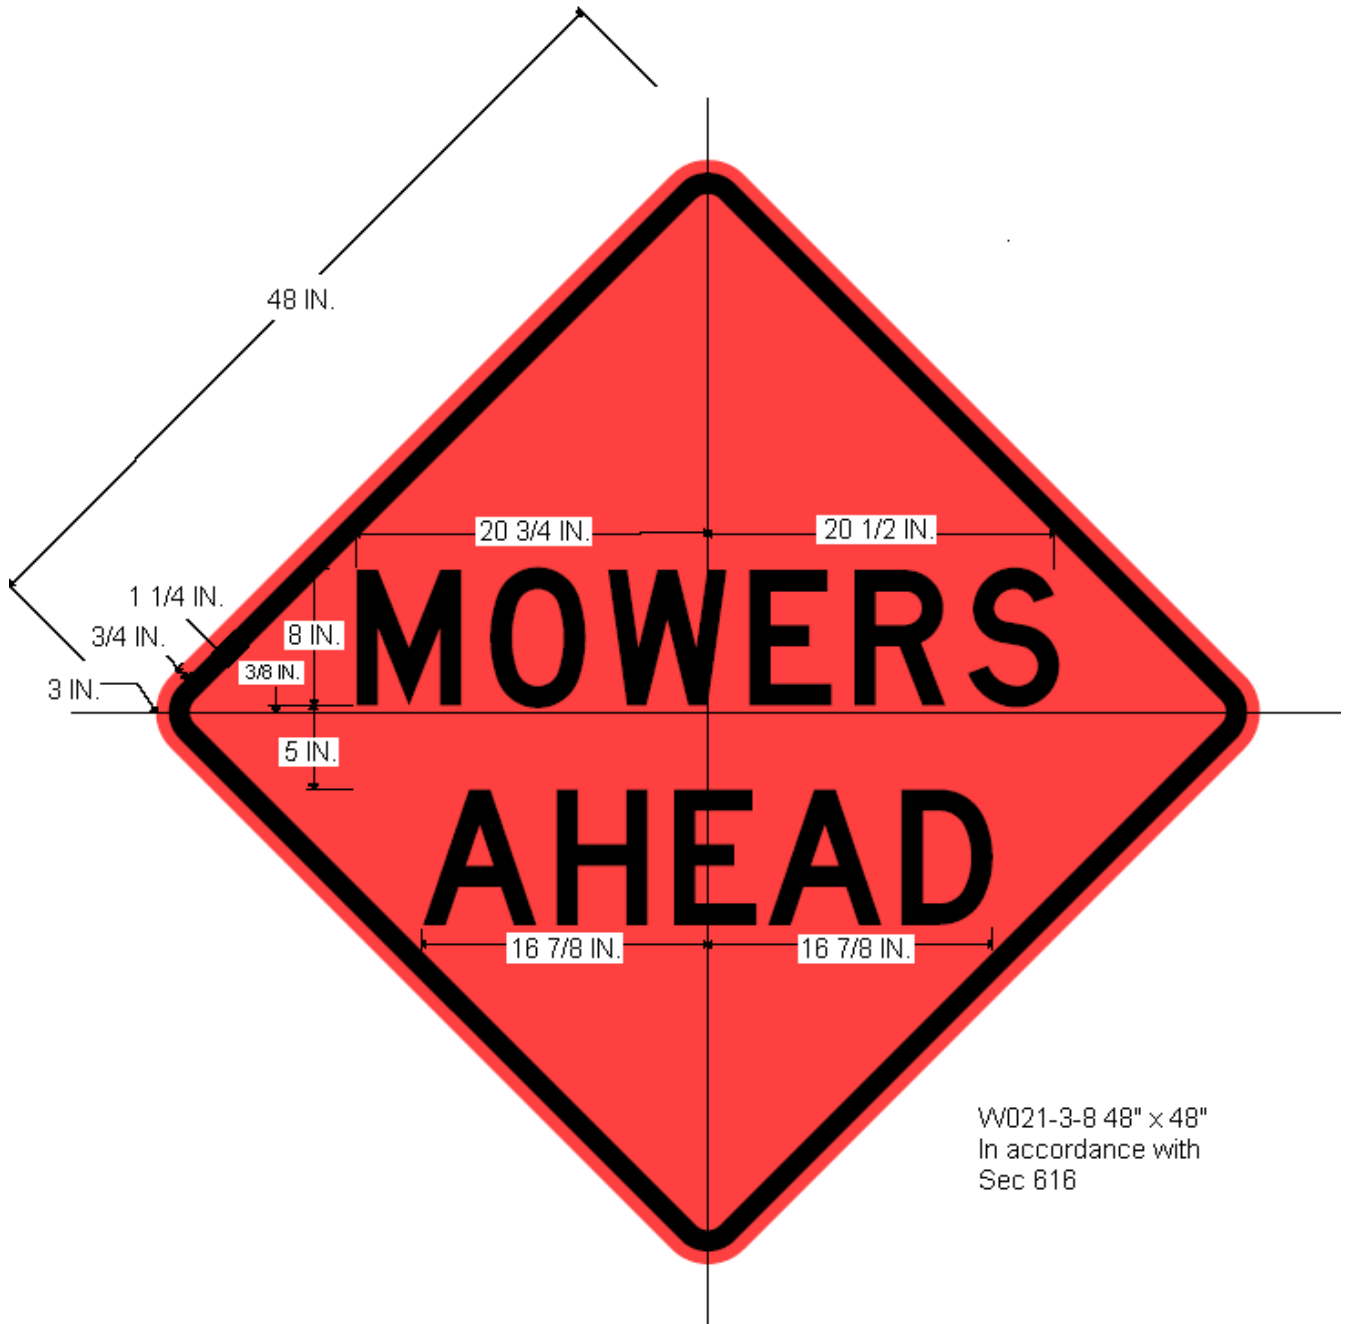

W021-3-8 48" x 48"
In accordance with
Sec 616

COLOR

Legend & Border – Black
Background – Orange

SHEETING

MoDOT Florescent Orange