
Mowing Project SL-2014-M Interstate 64 St Charles County Project Detail Sheet 1 of 4

# Contract Limits and Location Sketch SL14-111-RW7

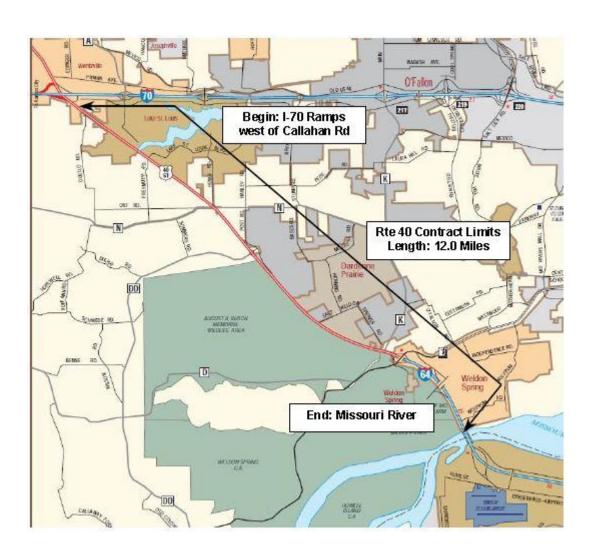

Mowing Project SL-2014-M Interstate 64 St Charles County Project Detail Sheet 2 of 4

#### **Contract Term and Extension**

Initial Contract Term: Commencing Contract Execution Date and shall terminate November 30, 2014
First Extended Term: Commencing April 1, 2015 and shall terminate November 30, 2015
Second Extended Term: Commencing April 1, 2016 and shall terminate November 30, 2016

### **Contract Limits and Exclusions**

See attached display for mowing areas.

### **Mowing and Litter Removal Cycles**

4 mowing and litter removal cycles are anticipated

### **Mowing Quantities**

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and the anticipated number of mowing cycles are authorized.

The quantities are calculated as follows:

# TOTAL AREA PER REGULAR MOWING CYCLE (APPROXIMATE): 204 ACRES TOTAL AREA PER FULL MOWING CYCLE (APPROXIMATE): 248 ACRES

Total Area in Contract Limits (Acres)	x	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
204	X	3	=	612
248	X	1		248

**TOTAL CONTRACT QUANTITY - MOWING: 860 ACRES** 

Mowing Project SL-2014-M Interstate 64 St Charles County Project Detail Sheet 3 of 4

### **Litter Removal Quantities**

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in	1	Number of Litter Removal	tal Litter Removal Quantity	
Contract Limits	X	Cycles During Contract	=	During Contract Term
(Acres)		Term		(Acres)
204	X	3	=	612
248	X	1	=	248

**TOTAL CONTRACT QUANTITY - LITTER REMOVAL: 860 ACRES** 

### **Contract Time for Completion of Work**

The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.


Mowing Cycle with Litter Removal Cycle: 204 Acre Cycle: 14 Working Days 248 Acre Cycle: 17 Working Days

## **Mowing Height & Special Equipment**

- 1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) All grass and vegetation shall be cut and trimmed to a height of six (6) inches unless otherwise directed by the engineer.

Mowing Project SL-2014-M Interstate 64 St Charles County Project Detail Sheet 4 of 4

### **Special Sign Detail**

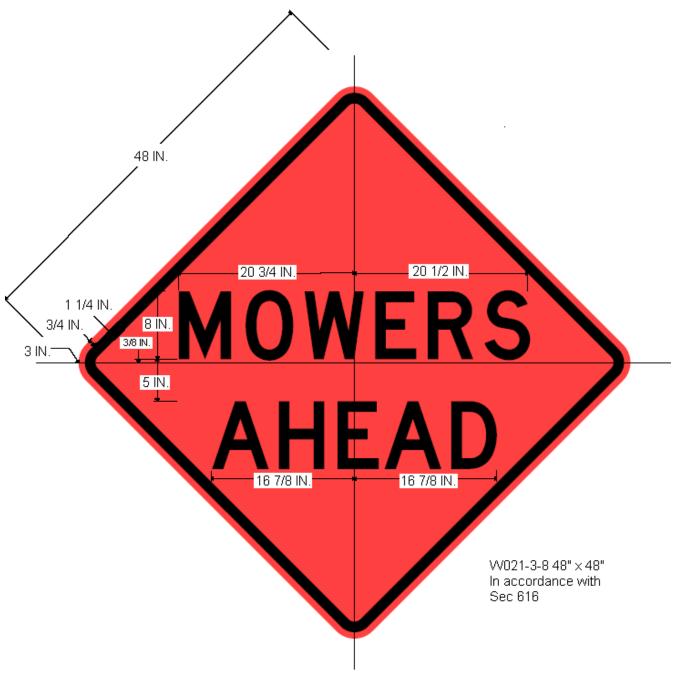

COLOR Legend & Border – Black Background – Orange

SHEETING MoDOT Florescent Orange