Mowing Project SL-2016-E Interstate 44 City of St. Louis Project Detail Sheet 1 of 4

Contract Limits and Location Sketch SL16-034-E-RW E



Mowing Project SL-2016-E Interstate 44 City of St. Louis Project Detail Sheet 2 of 4

Contract Term and Extension

Initial Contract Term: Commencing April 1, 2016 and shall terminate November 30, 2016 First Extended Term: Commencing April 1, 2017 and shall terminate November 30, 2017 Second Extended Term: Commencing April 1, 2018 and shall terminate November 30, 2018

Contract Limits

The following areas shall be included in the contract limits:

I-44

Begin Point: St Louis City Limits (East of Wellington Ct)

(approximate mile marker 283.8)

End Point: Lafayette

(approximate mile marker 290.5)

Notes:

1) Includes all areas between and adjacent to ramps at interchanges.

Mowing and Litter Removal Cycles

6 mowing and litter removal cycles are anticipated

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and the anticipated number of mowing cycles are authorized.

The quantities are calculated as follows:

TOTAL AREA PER MOWING CYCLE (APPROXIMATE): 134.87 ACRES

Total Area in
Contract Limits
(Acres)

Number of Mowing
Total Mowing Quantity

Total Mowing Quantity

During Contract Term
(Acres)

134.87 X 6 = 809.22

TOTAL CONTRACT QUANTITY - MOWING: 809.22 ACRES

Mowing Project SL-2016-E Interstate 44 City of St. Louis Project Detail Sheet 3 of 4

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in
Contract Limits
(Acres)

Number of Litter Removal
Cycles During Contract
Term

Number of Litter Removal
During Contract Term
(Acres)

X

6

=
809.22

TOTAL CONTRACT QUANTITY - LITTER REMOVAL: 809.22 ACRES

Contract Time for Completion of Work

The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.


Mowing Cycle with Litter Removal Cycle: 134.87 Acre Cycle: 12 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of 2 to 6 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) All grass and vegetation shall be cut and trimmed to a height of four (4) inches unless otherwise directed by the engineer.

Mowing Project SL-2016-E Interstate 44 City of St. Louis Project Detail Sheet 4 of 4

Special Sign Detail

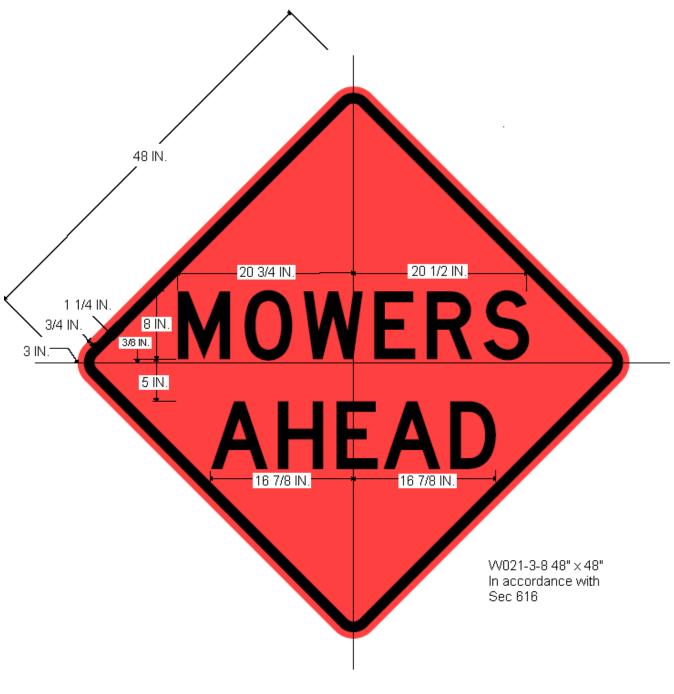

COLOR Legend & Border – Black Background – Orange

SHEETING MoDOT Florescent Orange