
Contract Limits and Location Sketch

SL14-107-RW7

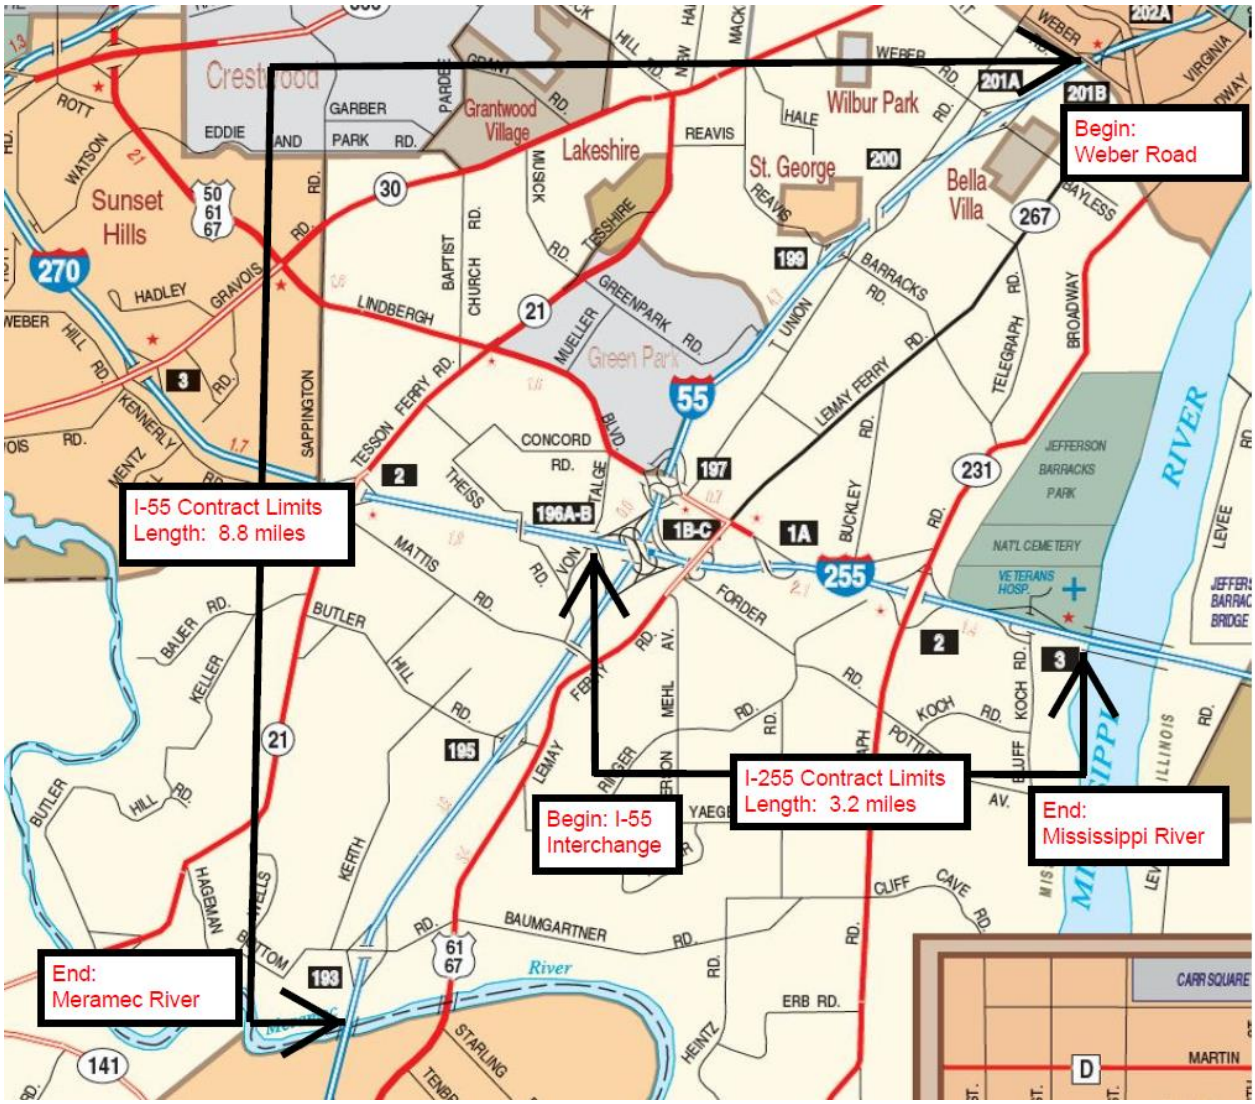

Contract Term and Extension

Initial Contract Term: Commencing Contract Execution Date and shall terminate November 30, 2014
First Extended Term: Commencing April 1, 2015 and shall terminate November 30, 2015
Second Extended Term: Commencing April 1, 2016 and shall terminate November 30, 2016

Contract Limits and Exclusions

See attached display for mowing areas.

Mowing and Litter Removal Cycles

4 mowing and litter removal cycles are anticipated

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and the anticipated number of mowing cycles are authorized.

The quantities are calculated as follows:

TOTAL AREA PER REGULAR MOWING CYCLE (APPROXIMATE): 157.44 ACRES
TOTAL AREA PER FULL MOWING CYCLE (APPROXIMATE): 193.24 ACRES

Total Area in Contract Limits (Acres)		Number of Mowing Cycles During Contract Term		Total Mowing Quantity During Contract Term (Acres)
157.44	**X**	**3**	**=**	**472.32**
193.24	**X**	**1**	**=**	**193.24**

TOTAL CONTRACT QUANTITY – MOWING: 665.56 ACRES

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in Contract Limits (Acres)		Number of Litter Removal Cycles During Contract Term		Total Litter Removal Quantity During Contract Term (Acres)
157.44	**X**	**3**	**=**	**472.32**
193.24	**X**	**1**	**=**	**193.24**

TOTAL CONTRACT QUANTITY – LITTER REMOVAL: 665.56 ACRES

Contract Time for Completion of Work

The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

Mowing Cycle with Litter Removal Cycle:
157.44 Acre Cycle: 11 Working Days
193.24 Acre Cycle: 13 Working Days


Mowing Height & Special Equipment

1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.

2) No special equipment or equipment restrictions are required for this contract.

3) All grass and vegetation shall be cut and trimmed to a height of six (6) inches unless otherwise directed by the engineer.

Special Sign Detail

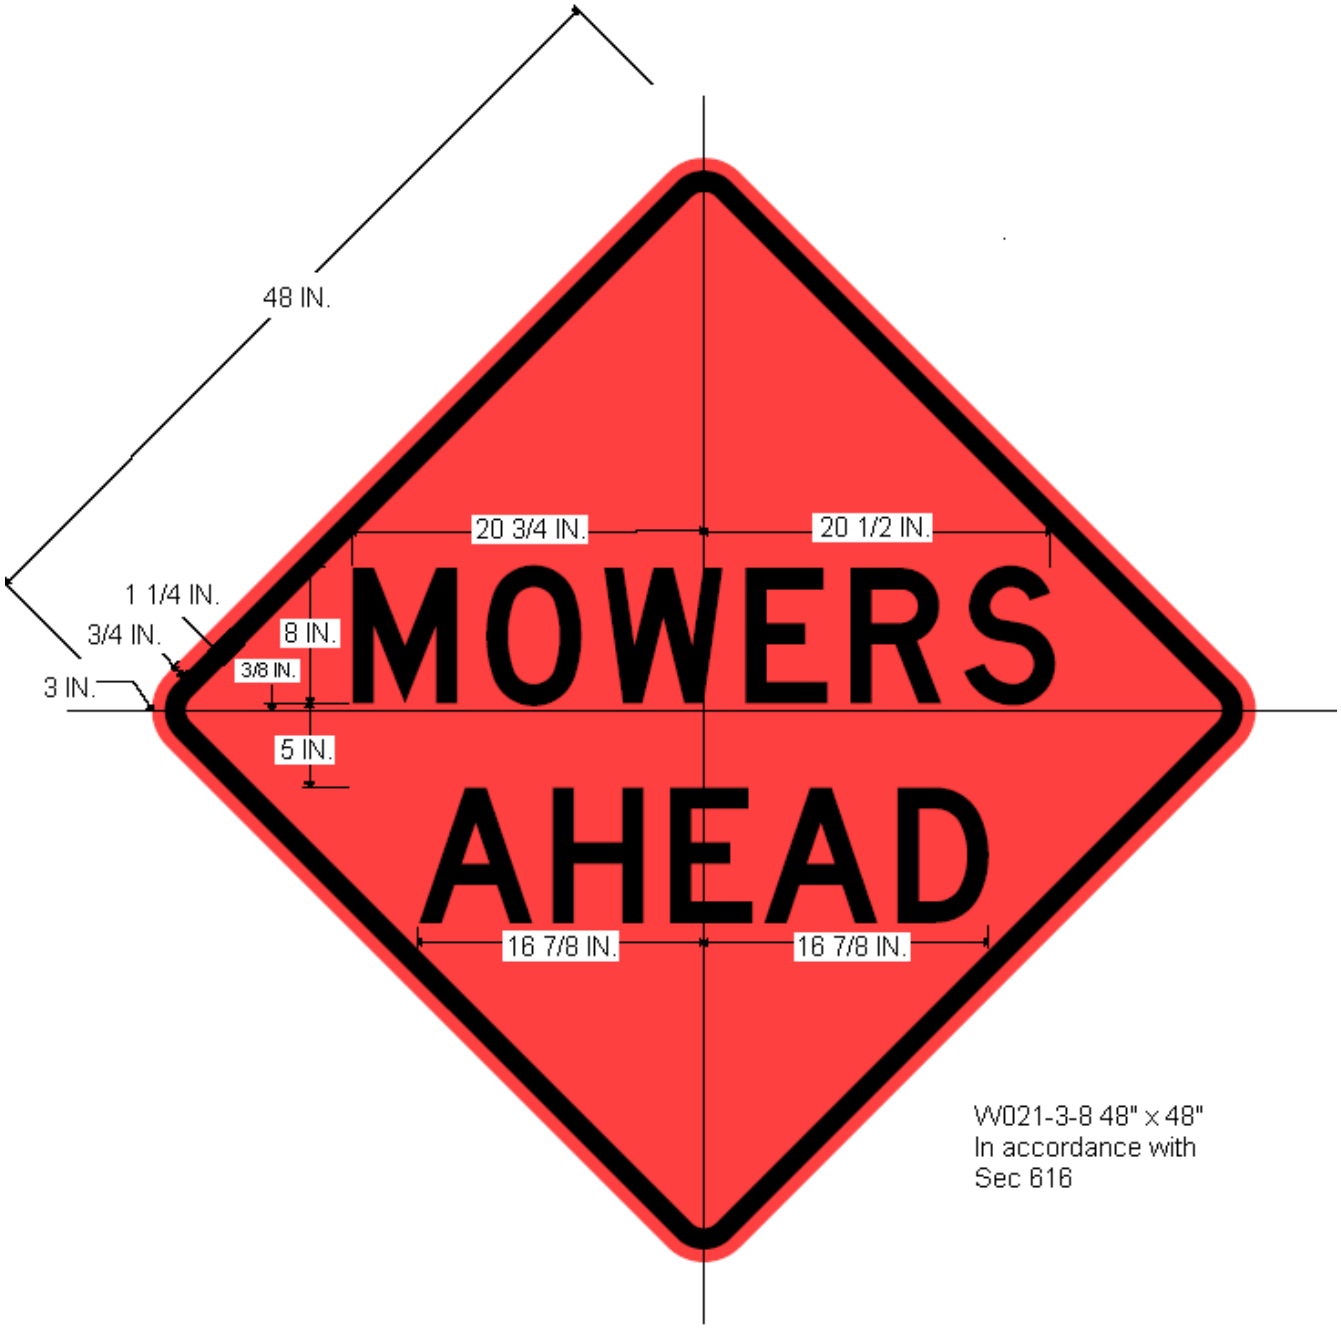

W021-3-8 48" x 48"
In accordance with
Sec 616

COLOR
Legend & Border – Black
Background – Orange

SHEETING
MoDOT Florescent Orange